






## Shielding

- The distributions for each shielding option below are shown in a direct orientation. See Mounting for all rotating head options.

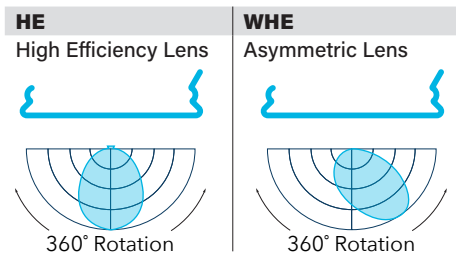

## CRI, CCT & Output

- Specify either 80 or 90 CRI
- Longer lead-time may apply for 90 CRI. Consult factory
- 90 CRI = R9≥50

### Custom Output- Lumens OR Wattage

<b>CL</b> _____	Specify CRI, CCT and desired lumens (i.e. CL835950)	Specify lumens between standard offering listed below. Lumens are specified per color temp
<b>CW</b> _____	Specify CRI, CCT and desired wattage (i.e. CW9409.5)	Specify watts between standard offering listed below

### 80 CRI

	Color	Output	Lumens per foot	Shielding		WHE	
				HE		Asymmetric Lens	
				High Efficiency		LPW	Watts/ft
<b>830LO</b>	3000K	Low	350	122	2.9	103	3.4
<b>830</b>	3000K	Standard	750	126	5.9	109	6.9
<b>830HO</b>	3000K	High	1000	127	7.9	111	9.0
<b>830VHO</b>	3000K	Very High	1250	129	9.7	109	11.4
<b>835LO</b>	3500K	Low	350	125	2.8	106	3.3
<b>835</b>	3500K	Standard	750	128	5.8	111	6.8
<b>835HO</b>	3500K	High	1000	131	7.7	111	9.0
<b>835VHO</b>	3500K	Very High	1250	133	9.4	112	11.1
<b>840LO</b>	4000K	Low	350	127	2.8	108	3.3
<b>840</b>	4000K	Standard	750	130	5.8	112	6.7
<b>840HO</b>	4000K	High	1000	132	7.6	112	8.9
<b>840VHO</b>	4000K	Very High	1250	135	9.3	114	11.0

### 90 CRI

<b>927LO</b>	2700K	Low	350	101	3.5	88	4.0
<b>927</b>	2700K	Standard	750	107	7.0	91	8.3
<b>927HO</b>	2700K	High	1000	109	9.2	92	10.8
<b>930LO</b>	3000K	Low	350	105	3.3	91	3.9
<b>930</b>	3000K	Standard	750	109	6.9	94	8.0
<b>930HO</b>	3000K	High	1000	109	9.1	96	10.5
<b>935LO</b>	3500K	Low	350	107	3.3	93	3.8
<b>935</b>	3500K	Standard	750	112	6.7	96	7.8
<b>935HO</b>	3500K	High	1000	112	8.9	98	10.2
<b>940LO</b>	4000K	Low	350	106	3.3	92	3.8
<b>940</b>	4000K	Standard	750	111	6.8	95	7.9
<b>940HO</b>	4000K	High	1000	111	9.0	97	10.3

<sup>1</sup>LPW and watts/ft based off 48" fixture size.

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



## Length

- All individual units cannot be joined
- The PH and WH mounting options have a 1-3/8" hub on each side of the fixture, the FL mounting option has 1/2" hub at each end of the fixture, see installation instructions for more details and chart.


2	3	4	6	8	-
Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Cont. Run Specify nominal overall row length to the 1'
24-5/8" (610.2mm)					
	36-5/8" (930.3mm)				
		48-5/8" (1235.1mm)			
			72-5/8" (1844.7mm)		
				96-5/8" (2454.3mm)	
Specify to the 1' >>>					

## Mounting

- Pendant lengths are 12", 18", and 24"
- Wall Hub lengths are 6", 12", 18", and 24"
- End caps and standard white power cord attached at factory
- Canopies, hubs, and pendants match fixture finish, power cords are white, grey, or black depending on fixture finish. See Finish section for additional details
- Approved for wet location, IP65 rated, unless otherwise noted

- Refer to installation instructions during installation at the job site
- Maximum fixture weight is 20 lbs. per 4' fixture
- Fixture head rotation provides asymmetric output
- The PH and WH mounting options have a 1-3/8" hub on each side of the fixture, the FL mounting option has 1/2" hub at each end of the fixture, see installation instructions for more details and chart.

<b>FL</b>	Flush Mount (360° rotating head)
<b>PH</b>	Pendant Hub (360° rotating head)
<b>WH</b>	Wall Hub (360° rotating head)

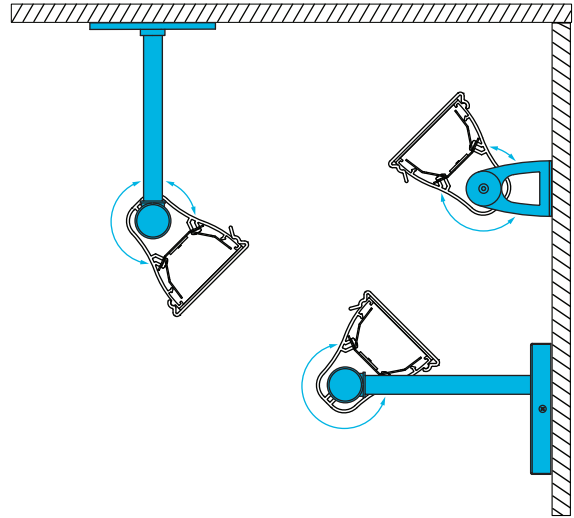

## Voltage

- Some MOFFAT configurations will not accommodate all voltage options; consult with factory

<b>U</b>	Universal
<b>1</b>	120 volt
<b>2</b>	277 volt
<b>3</b>	347 volt



## Driver

- Standard Driver Option = FSD
- Driver Lifetime: 50,000 hours at 25°C ambient operating conditions
- For more driver options see Pinnacle Resource Guide
- Some MOFFAT configurations will not accommodate all driver options; consult with factory

### 0-10V Drivers

<b>FSD</b>	Factory Select Driver 1%, 0-10v
<b>PL2</b>	Signify Advance Xitanium 1%, 0-10v
<b>PL4</b>	Advance Xitanium 347v 1%, 0-10v, requires 347v
<b>OL2</b>	eldoLED Optotronic, 1%, 0-10v
<b>OL4</b>	eldoLED Optotronic 347v, 1% 0-10v, requires 347v option
<b>EE1</b>	eldoLED ECOdrive 1%, 0-10v Logarithmic
<b>EE2</b>	eldoLED ECOdrive 1%, 0-10v Linear
<b>ES1</b>	eldoLED SOLOdrive 0-10v, 0.1% Logarithmic
<b>ES2</b>	eldoLED SOLOdrive 0-10v, 0% Linear

### DALI Drivers

<b>EE3</b>	eldoLED ECOdrive .1%, DALI (logarithmic)
<b>ES3</b>	eldoLED SOLOdrive .1%, DALI (logarithmic)
<b>OD1</b>	eldoLED Optotronic 1%, DEXAL
<b>OD2</b>	eldoLED Optotronic 1%, DALI 2 Channel

### Lutron Drivers

<b>LH1</b>	Lutron Hi-lume Soft-on, Fade-to-black 1%, EcoSystem, LDE1
<b>LH4</b>	Lutron Hi-Lume 1%, 2-wire, Lutron-LTEA2W, 120v only

### Alternate Drivers

<b>PS1</b>	Signify Advance Xitanium Step Dimming 50%/100%
<b>EH1</b>	ELV 120v only, 0-10v universal

## How to specify Circuiting, Battery and Emergency

- Select fixture circuiting from options below
  - Some MOFFAT configurations will not accommodate all circuiting options, consult with factory

## Circuiting

<b>1</b>	Single Circuit
<b>M</b>	Multi Circuit
<b>E</b>	Emergency Circuit only
<b>N</b>	Night Light Circuit only

- Battery and emergency section options are available in addition to fixture circuit
  - Select battery and emergency section options below; factory shop drawing required
  - Some MOFFAT configurations will not accommodate all circuiting options, consult with factory

## Battery and/or Emergency If Required

- 0** No battery or specific emergency section required

## Battery

- Select battery section type if required, indicate total QTY. *Example 2PL*
- 90 minute battery runtime; test button is integral to fixture
- For more battery options available, see Pinnacle Resource Guide

<b>0</b>	No Battery
<b>_FSB</b>	Factory Select Battery (10w option)
<b>_FSBST</b>	Factory Select Battery (10w, Self Testing)
<b>_ILL</b>	Iota 10w Integral Lithium, Self Testing
<b>_IRH</b>	Iota 20w Remote
<b>_PRH</b>	Bodine 20w Remote
<b>_PLL</b>	Bodine 10w Integral Lithium, Self Testing

**For Approximate Battery Lumen Output**

- Multiply battery wattage X fixture LPW shown on Lumen Table
- 92.3 (LPW) x 10 (watts) = 923 battery lumen output



## Emergency

- Select emergency section type if required, indicate total QTY. *Example 1E*
- Combine battery and emergency section ordering codes if both options are selected

<b>_FSG</b>	Factory Select Automatic Load Control Relay (ALCR), UNV
<b>_GI</b>	Emergency Transfer Switch (ETS) DR Emergency Control Device, UNV
<b>_GB</b>	Bodine GTD, Generator Transfer Device, 120v or 277v
<b>_E</b>	Emergency circuit section
<b>_N</b>	Night Light circuit section
<b>_L</b>	Life Safety circuit section NO THROUGH WIRE

### Combination Section Ordering Examples

- Single circuit, (1) 10w battery, (1) emergency section    Ordering Code: 1-1PL1E
- Multi circuit, (2) 10w battery, (2) emergency sections    Ordering Code: M-2PL2E
- Single circuit, (1) night light section    Ordering Code: 1-1N

### Battery OR Emergency Ordering Examples

- Single circuit, 10w Integral Battery    Ordering Code: 1-1PL
- Emergency only, 10w Integral Battery    Ordering Code: E-1PL
- Single circuit, GTD required    Ordering Code: 1-1GB

## Finish


- Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes
- Selecting a fixture finish other than white may impact lumen output; consult factory for more information

<b>W</b>	White ( <i>white cord/white canopy</i> )
<b>S</b>	Metallic Silver ( <i>grey cord/silver canopy</i> )
<b>BL</b>	Textured Black ( <i>black cord/black canopy</i> )
<b>BR</b>	Bronze ( <i>white cord/bronze canopy</i> )
<b>GR</b>	Graphite ( <i>white cord/graphite canopy</i> )
<b>CC</b>	Custom Color ( <i>white cord/color match canopy</i> )

## Fixture Options

- Additional options to enhance the fixture and finish of the product

<b>GMF</b>	Slow Blow Fusing
<b>V</b>	Visor
<b>DSP</b>	Customer Supplied Battery/Driver/Sensor






Photometrics


Satine Lens

Test # ITL91824  
 Catalog # MW-HE-840VHO-4  
 Lumens 5401 lm  
 Watts 39.1 W  
 Efficacy 138 LPW



Asymmetric Lens

Test # ITL92383  
 Catalog # MW-HE-840VHO-4  
 Lumens 4536 lm  
 Watts 41.2 W  
 Efficacy 110 LPW



Candela Distribution

Vert Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	2262	2262	2262	2262	2262
5	2251	2249	2248	2245	2246
10	2216	2207	2204	2196	2192
15	2160	2136	2132	2115	2104
20	2072	2041	2025	1996	1974
25	1959	1921	1894	1846	1819
30	1828	1781	1732	1666	1633
35	1669	1622	1554	1470	1434
40	1497	1445	1362	1269	1232
45	1310	1261	1170	1074	1037
50	1121	1075	985	896	865
55	938	890	809	731	706
60	753	718	648	588	565
65	587	558	502	457	443
70	425	409	372	341	330
75	279	271	252	236	233
80	149	152	148	145	144
85	49	57	68	75	78
90	3	15	32	44	48

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	17878	14124	12022
55	15696	11420	9438
65	13212	8855	7254
75	10055	6174	5122
85	4793	2869	2735

Bug Rating  
 B2-U3-G1

Candela Distribution

Vert Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	1613	1613	1613	1613	1613
5	1717	1711	1686	1649	1607
10	1813	1797	1744	1668	1586
15	1897	1869	1789	1669	1550
20	1949	1915	1811	1652	1502
25	1967	1929	1809	1617	1434
30	1939	1900	1774	1557	1352
35	1863	1827	1698	1474	1252
40	1736	1705	1591	1368	1141
45	1570	1542	1442	1239	1015
50	1366	1349	1272	1091	880
55	1149	1143	1078	931	749
60	941	927	886	767	611
65	732	726	689	600	479
70	537	532	512	446	353
75	367	361	344	296	233
80	214	211	198	167	124
85	94	92	81	62	40
90	39	35	26	12	1

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	18201	17407	13852
55	15361	15217	12534
65	11986	12154	10781
75	8068	8428	8397
85	3296	3418	3912

Bug Rating  
 B2-U3-G1

Fixture tested in direct orientation. Fixture head is rotatable for asymmetric aiming as needed. For all available IES files, please visit our website at [pinnacle-ltg.com](http://pinnacle-ltg.com). Photometry testing in accordance to IESNA-LM-79-08 at an NVLAP accredited testing laboratory. Testing conducted at 25°C ambient conditions

Approvals & Certifications

**Construction:** 6063-T6 Extruded aluminum housing. Fixtures can be joined to create continuous runs. Standard high reflectance die-formed reflector. Fully gasketed lens and endcaps.

**Shielding:** Diffuse snap-in acrylic lens, removable for maintenance.

**Mounting:** Pendant mount, wall mount, and flush mounts available. Fixture head rotation provides asymmetric output. Refer to installation instructions for appropriate ceiling detail. Maximum fixture weight is 20 lbs. per 4' fixture.

**LED:** 25°C test environment. Lumen output/wattage has a margin of +/- 5%. Luminaire configurations tested in accordance with IES LM-79. Diodes tested in accordance with IES LM-80. Lifetime calculated using IES TM-21. Minimum lifetime greater than 60,000 hours. Lifetime Projection: L70 lifetime - 146,500 hours and L90 lifetime - 45,000 hours. MacAdam 3-Step Ellipses. Not all products are Lighting Facts listed. For all available IES files, please visit our website at [pinnacle-ltg.com](http://pinnacle-ltg.com).

**CRI, CCT & Lumen Output:** Four lumen packages available. Low (LO), Standard, High (HO), and Very High (VHO). Custom outputs are available. Specify custom lumens or watts between standard offering listed on CRI, CCT & Output page. 80 CRI is available for 3000K, 3500K, and 4000K. 90 CRI is available for 2700K, 3000K, 3500K, and 4000K. 90 CRI = R9≥50. Fixture performance and photometric data based on 4' configuration. Published lumen or wattage data based on OL1 configuration.

**Voltage:** Universal (U), 120 volt (1), 277 volt (2) and 347 volt (3) options available. Must specify OL4 in Driver section when 347 volt (3) is selected. Some MOFFAT configurations will not accommodate all voltage options; consult with factory.

**Driver:** Standard Driver Option is Advance Xitanium 0-10V, 1% = PL2. Electronic driver, Power factor is >0.9 with a THD <20%. Driver Lifetime: 50,000 hours at 25°C ambient operating conditions. Ambient operating range: -4F/-20C to 122F/50C For more driver options, see Pinnacle Resource Guide. Some MOFFAT configurations will not accommodate all driver options.

**Circuiting:** Select from single circuit (1), Multi circuit (M), Emergency circuit (E), Night Light circuit (N) or Life Safety (L). For emergency circuiting situations that require no through wire or circuit separation, Life Safety Circuit should be selected. This will provide a separate power feed and only the Life Safety Circuit in that section. Some MOFFAT configurations will not accommodate all circuiting options; consult with factory.

**Battery & Emergency:** Select battery or emergency options if required. If battery or emergency option is not required, enter 0. Battery duration is 90 minutes as standard. Test button is integral to fixture, fixture length increases by 1". For more Battery options, see Pinnacle Resource Guide.

**Finish:** Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish, consult factory for chip of standard paint finishes. Canopies, hubs, and pendants painted white unless specified differently in the options section of the part number. Contact factory for additional custom color and finish options.

**Controls:** Pinnacle is able to accommodate different control solutions from different manufacturers. Consult Factory for more information.

**Labels:** UL and cUL 1598 listed. Approved for Wet location unless otherwise noted. IP65 rated.

**Fixture Weight:** Maximum fixture weight is 20 lbs (per 4' fixture).

**Buy American Act Compliant**

**Warranty:** MOFFAT LED offered with a 5-year limited warranty. Covers LED, driver and fixture.

Specifications and dimensions subject to change without notice. Specification sheets that appear on [pinnacle-ltg.com](http://pinnacle-ltg.com) are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | [pinnacle-ltg.com](http://pinnacle-ltg.com) | O: 303-322-5570 F: 303-322-5568

MW\_LED\_SPEC\_NOV2023