



AC Cable Installation 2-3


Remote Box Details 4

Reflector Details 5




1 LAYOUT

Lay out mounting and Jbox locations. Power is at center mount of fixture.

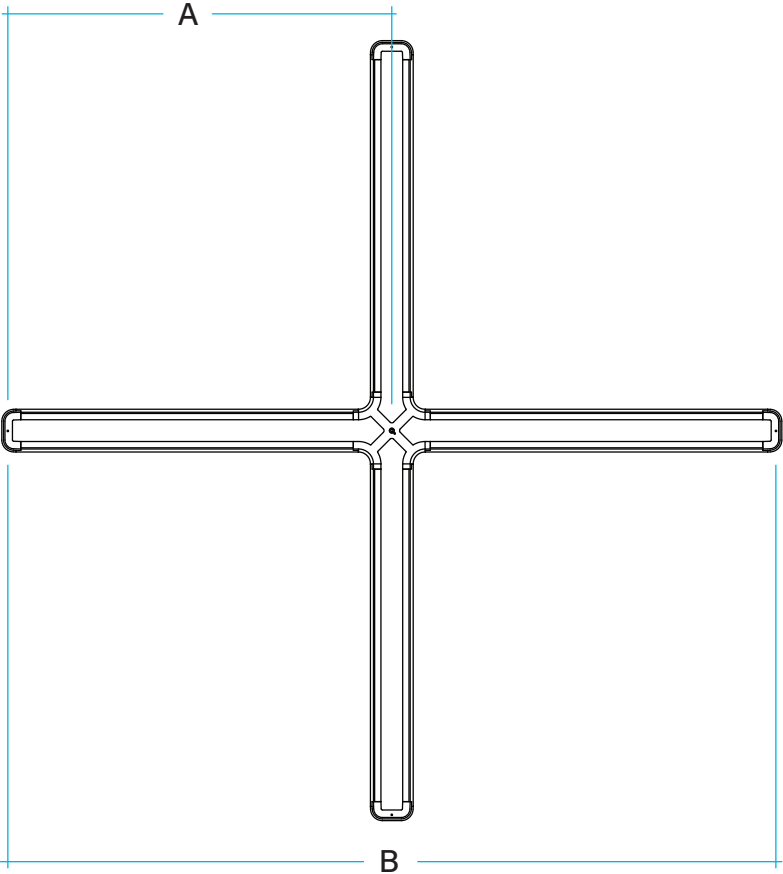

Mounting Locations


		X2	X3	Y2	Y3
S3UF S3DF	A	28-1/2"	40-1/2"	46-3/4"	67-1/2"
	B	56-7/8"	80-7/8"	40-1/2"	58-1/2"
	C	N/A	N/A	27"	39"
S3NF	A	28-1/4"	40-1/4"	46-1/2"	67-1/4"
	B	56-1/2"	80-1/2"	40-1/4"	58-1/4"
	C	N/A	N/A	26-3/4"	38-3/4"

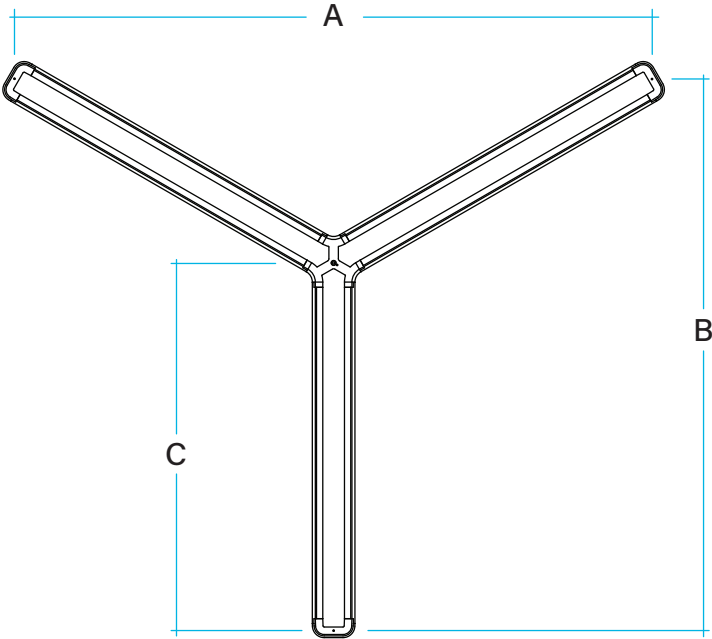




1 CENTRAL POWER MOUNT

Install key hole bracket to J-Box (*by others*). Run AC cable through AC cable gripper to set fixture height and level fixture. Run conductive cable through key hole bracket and make wiring connections inside of J-Box. Use cable collar to put light tension in the conductive cable. To adjust, unscrew 4-40 cap head screws in collar, adjust to desired height, and tighten screws. Slide canopy up to ceiling plane.

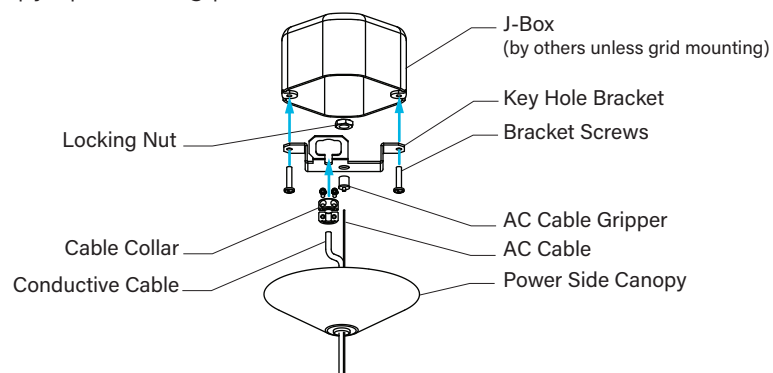


2 NON-POWER MOUNT

Install 1/4-20 stud (*by others*) or IDS Clip (*by others*) for non-power mounts ($1/2"$ below ceiling plane). Secure canopy to stud or IDS clip using coupler.

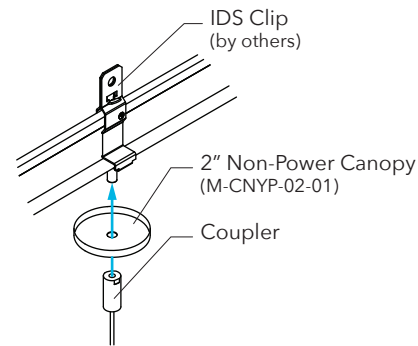

Grid Mounting

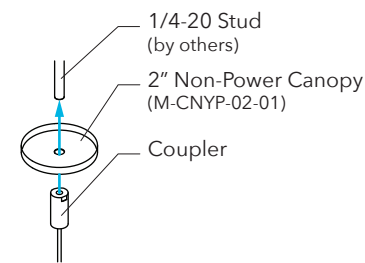


Inaccessible Mounting

NOTE: When mounting fixture make sure all legs of the form are properly supported. While leveling **DO NOT** higher or lower one side significantly more than the others as this puts strain on the center hub.




1 STANDARD REMOTE BOX TO GRID

Place Remote Driver Box onto grid and bend grid tabs over securing with #8 Sheet Metal Screw. To open remote box remove three #8-32x1/4 screws on top of box. Use 1/2" Trade Knock out on high voltage side to connect to building power. Use 2' long Flexwhip to bring power to J-Box.

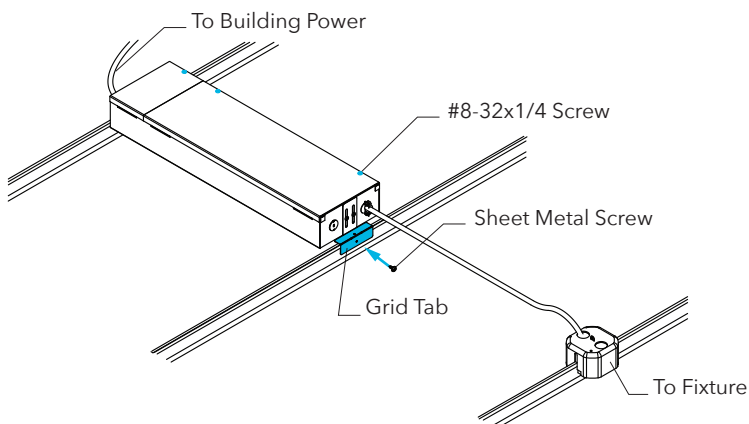


1 SLIM REMOTE BOX TO GRID

Install slim remote driver box onto grid using pre-installed grid clips. To open remote box remove two #6-32x1/4 screws on top of box. Use 1/2" trade knockout on high voltage side to connect to building power. Use 2' long Flexwhip to bring power to J-Box.

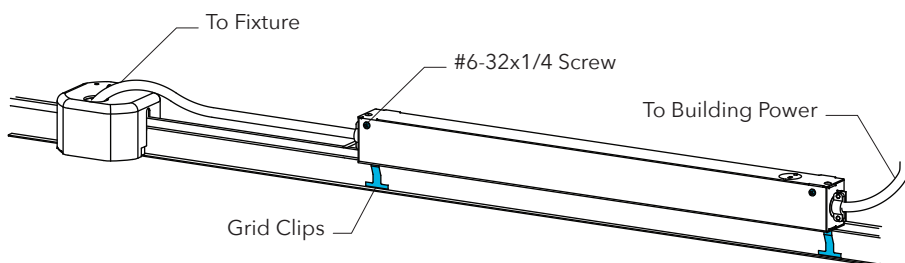


2 STANDARD REMOTE BOX TO SURFACE

Remove Grid Brackets on sides of Remote Driver Box. Open Remote Driver Box by removing three #8-32x1/4 screws on top of box. Install Remote Driver box to surface using 1/4" Mounting Hardware. Use 1/2" Trade Knock out on high voltage side to connect to building power. Use 2' long Flexwhip to bring power to J-Box.

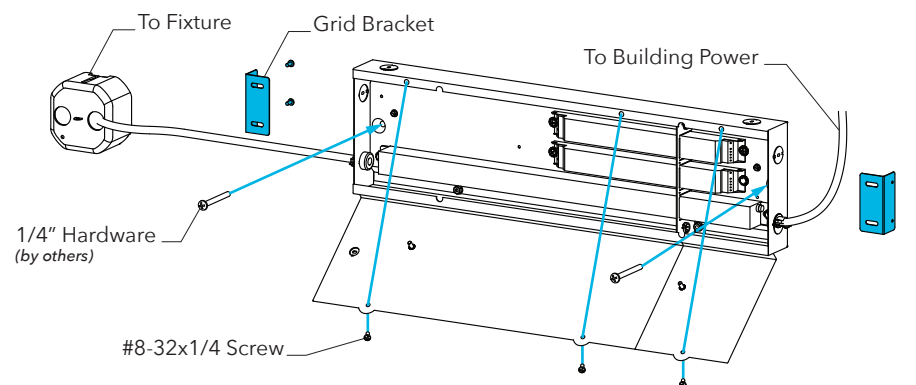

2 SLIM REMOTE BOX TO SURFACE


Remove two grid brackets on back of remote driver box. Open remote driver box by removing two #6-32x1/4 screws on top of box. Install remote driver box to surface using 1/4" mounting hardware (by others). Using 1/2" trade knockout on high voltage side connect to building power. Use 2' long Flexwhip to bring power to J-Box.

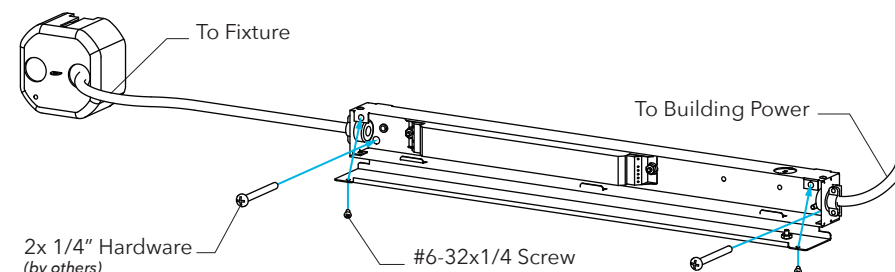




1 LENS REMOVAL

Squeeze lens near end cap and pry away from fixture using a putty knife. Pull down gently while sliding putty knife along the length of lens.

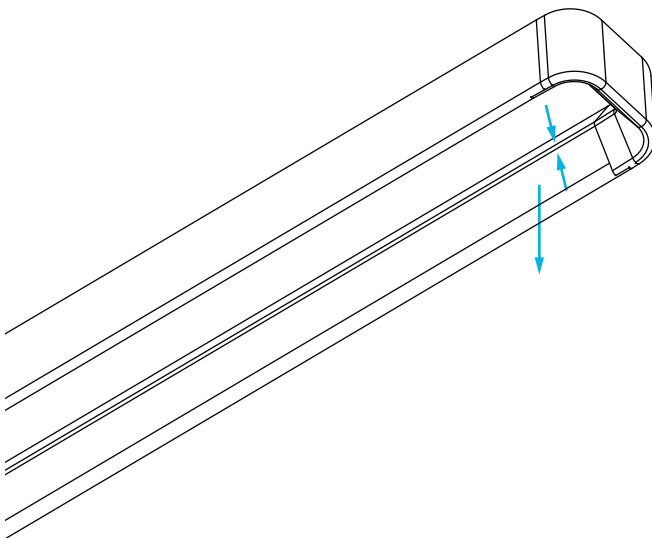

2 LENS INSTALLATION

Beginning at one end, squeeze lens legs together and slide into fixture. Slowly insert rest of lens down the length of the fixture, snapping into place.

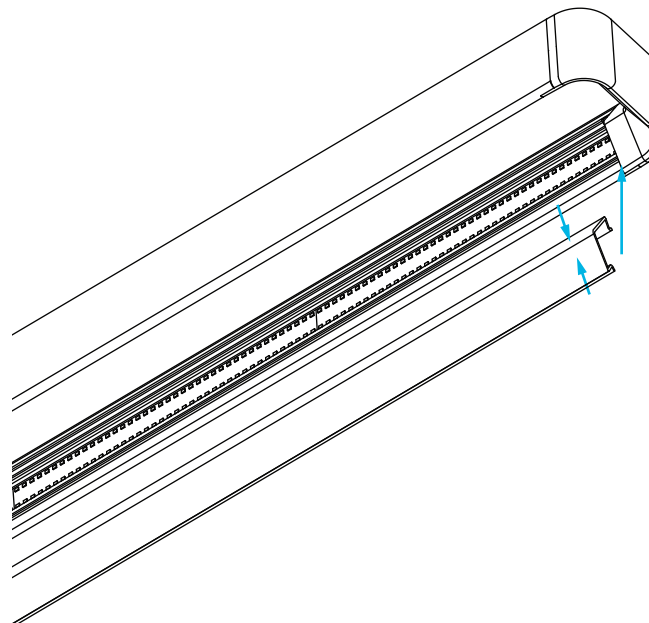

DISCLAIMERS

*This product must be installed in accordance with applicable installation and electrical codes by a professional familiar with the construction and operation of the product.
Minimum 90° C supply conductor.
All electrical connections must be performed by a certified electrician to applicable local and national electrical codes.*

*Damaged components must never be used.
Contact Pinnacle prior to making any fixture alterations.
Contact Pinnacle with any installation questions or field issues.*