

LINERO_{L8}

Project Name _____

Date _____

Catalog Number _____

Type _____

T5 and T8 Direct and Indirect Linear Suspended



STANDARD SATINE LENS LIGHT DISTRIBUTION

Direct 30%; Indirect 70%



CONSTRUCTION One piece die-formed 18 gauge steel housing in a 8-3/16" by 1-13/16" profile. Standard 4'-0", 8'-0" and 12'-0" fixtures can be joined to create continuous runs.

REFLECTOR Standard high reflectance die-formed white painted aluminum. Optional specular reflector and light control options provide flexibility in direct/indirect light output.

ENDCAPS Die-cast aluminum endcaps are fastened with concealed hardware.



LENS Standard satine lens with optional micro-fluted, micro-conical, or micro-diffuse lens.

ELECTRICAL T5, T5HO: Program start 120/277 volt integral electronic ballast with less than 10% THD. T8: Instant start 120/277 volt electronic ballast with less than 10% THD. Through wiring with quick connects standard. Standard single circuit. Each ballast provided with disconnects to meet luminaire disconnect code requirement.

MOUNTING Adjustable aircraft cable mounts on 4'-0", 8'-0" and 12'-0" centers. Available in single or dual aircraft cable. Refer to installation instructions for appropriate ceiling detail.

FINISH Standard powder-coat textured white painted finish. Consult factory for custom colors and finish options.

LABELS UL and cUL Listed, approved for dry/damp location unless otherwise noted.

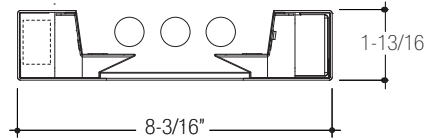

LUMINAIRE SPECIFICATION

Sample Catalog #: L8A-1T5-32'-AC48G1-120-1C-W


L8 _ -	T _ -	' -	-	-	-	-	-
HOUSING	LAMPS	LENGTH	MOUNTING	VOLTAGE	CIRCUITING	FINISH	OPTIONS
L8A- Linero 8, Satine Lens L8M- Linero 8, Micro Conical Lens L8F- Linero 8, Micro Fluted Lens L8D- Linero 8, Micro Diffuse Lens	1T5- (1) 28W T5 2T5- (2) 28W T5 3T5- (3) 28W T5 1T5HO- (1) 54W T5HO 2T5HO- (2) 54W T5HO 3T5HO- (3) 54W T5HO 1T8- (1) 32W T8 2T8- (2) 32W T8 3T8- (3) 32W T8	Adjustable Aircraft Cable ^{1,2} AC48G1- 1" T-Bar AC48G9- 9/16" T-Bar AC48GS- Slotted T-Bar AC48JB- Junction Box AC48ST- Structure AC548G- 5" Non-Power Canopy ³ AC548JB- 5" Non-Power Canopy ³ SQ48G- 5" Square Canopy ³ SQ48JB- 5" Square Canopy ³ Dual Adjustable Aircraft Cable ^{1,2,9} DAC48G1- 1" T-Bar DAC48G9- 9/16" T-Bar DAC48GS- Slotted T-Bar DAC48JB- Junction Box DAC48ST- Structure	120- 120 V 277- 277 V 347- 347 V ⁴ UNV- UNV ⁴ (120/277)	1C- Single Circuit 2C- Dual Circuit ^{5,6} 1D- Single Circuit Dimming ⁵ 2D- Dual Circuit Dimming ^{5,6} 1B- Single Circuit with Battery Pack ⁵ 2B- Dual Circuit with Battery Pack ^{5,6} 1E- Single Circuit with Emergency Circuit ⁵ 2E- Dual Circuit with Emergency Circuit ^{5,6}	W- Matte White CC- Custom Color	QS- Quick Ship ⁸ DSM- Daylight Sensor Master (sensor included) ⁷ DSS- Daylight Sensor Satellite (sensor not included) ⁷ DG- Dust Guard (Covers top of luminaire) SR- Specular Reflector LCR- Low Ceiling Reflector (1T5, 1T8 lamp only) CL- 90 Degree Corner LC- Lens Cover ¹⁰	
Individual Units 4- 4' individual 8- 8' individual 12- 12' individual Continuous Runs xx'- Specify nominal overall row length in 4' increments							

¹Standard 48" Adjustable Cable. Consult factory for additional lengths. ²Consult factory for tegular edged tiles. ³Replaces standard 2" non-power canopy. Square canopy replaces standard round. Must specify grid ceiling type on AC548G__ and SQ48G__. Select from G1 (1" grid), G9 (9/16" grid), or GS (slotted); for example AC548G1. ⁴347 volt and UNV not available with battery packs. ⁵Some Linero configurations will not accommodate all electrical options. Consult factory. ⁶2 lamps switched side-by-side, 3 lamps switched inboard/outboard. ⁷See back page for ordering information. Requires 0-10 volt dimming. ⁸Includes universal voltage, standard white, single (1C) and dual (2C) circuit. ⁹Square canopies supplied with dual aircraft cable mount. Round canopy not available with dual aircraft cable. ¹⁰Recommended for highly transmissive lensing options.




Pinnacle Architectural Lighting 12655 East 42nd Avenue, Suite 50 Denver, CO 80239
 Phone 303.322.5570 Fax 303.322.5568 www.pinnacle-ltg.com
 © 2011 Pinnacle Architectural Lighting® November 2011


Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.




Test # 203838
Part # L8A-2T5-4-SR
Total Luminaire Efficiency: 92%



Test # 203847
Part # L8D-2T5-4-SR
Total Luminaire Efficiency: 93%




Test # 203865
Part # L8M-2T5-4-SR
Total Luminaire Efficiency: 91%




Test # 203856
Part # L8F-2T5-4-SR
Total Luminaire Efficiency: 93%


• INDIVIDUAL MODULES

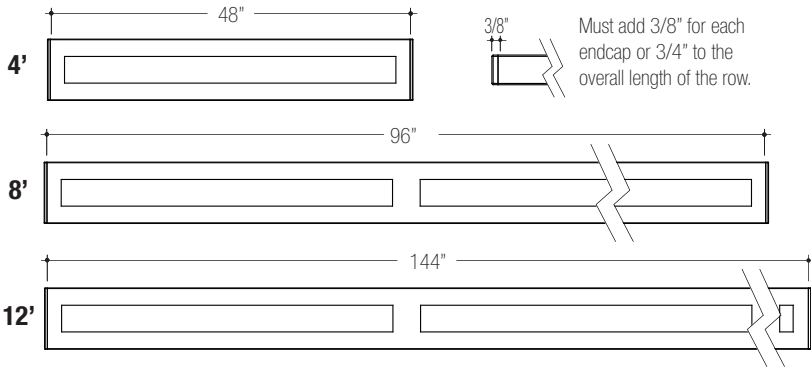

• MOUNTING OPTIONS

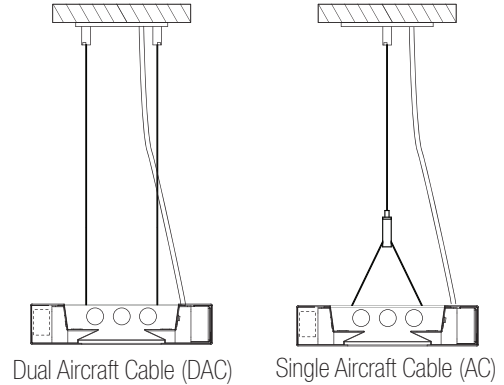


• DAYLIGHT SENSOR



APPLICATION: Daylight sensors are an ideal solution for saving energy, creating smart environments and aiding sustainability. Pinnacle Lighting's daylight sensor is a turn key solution for lighting control. The sensor is easily wired to the 0-10 volt dimming ballast installed in the fixture.

DAYLIGHT SENSOR: Daylight sensor dims lights based on electric light and presence of daylight. Sensor can control up to 20 dimming ballasts. Sensor is factory calibrated to 45 footcandles (fc), adjustable by 1/3 to 3 times the default setting by rotating the aperture.

STANDARD SENSOR PLACEMENT: The sensor location in Linero fixtures allows for easy placement of the sensor in relation to the space being daylighted. Housings can be rotated for more flexibility.

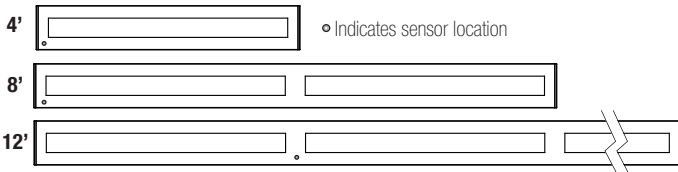


ORDERING INFORMATION: Specify row layout in the Options section of the part number when ordering Daylight Sensor. Daylight Sensor Master (DSM) includes the fixture with sensor and dimming ballast. Controls DSS units. Daylight Sensor Satellite (DSS) includes the fixture with a sensor compatible dimming ballast only. Must be used in conjunction with a DSM unit. See example 4 for information on ordering rows with both standard circuiting and daylight sensor.

Example 1



• Indicates sensor location


Example 2



Example 3



Example 4




• LOW CEILING REFLECTOR


APPLICATION: Linero's low ceiling reflector eliminates hot spots while increasing uniformity across the ceiling. Utilize when fixtures must be installed as close as 10" from the ceiling. Available on 1T5 and 1T5HO lamp fixtures only.

CONSTRUCTION: Highly reflective white painted aluminum. Low Ceiling Reflector securely snaps onto top of the lamp.

ORDERING INFORMATION: Specify "LCR" in the options section of the part number. (Sample Catalog #: L8A-1T5-32'AC48G1-120-1C-W-LCR)



• CORNERS

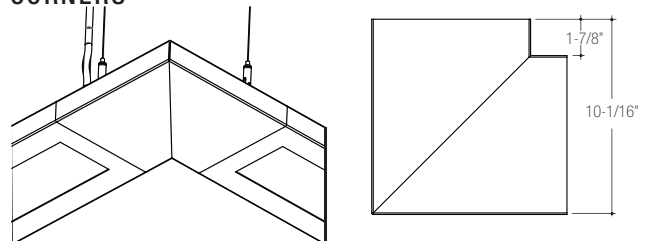

ORDERING INFORMATION: Specify corners in the options section of the part #.
Sample Catalog #: L8A-1T5-24-AC48G1-120-1C-W-CL.