







# FINA 60" AND 72" RECESSED INSTALLATION INSTRUCTIONS


Grid Ceiling Installation .....	2-4
Flanged Mount Installation .....	5-7
Spackle Flange Mount Installation .....	8-10





# FINA RECESSED GRID CEILING INSTALLATION

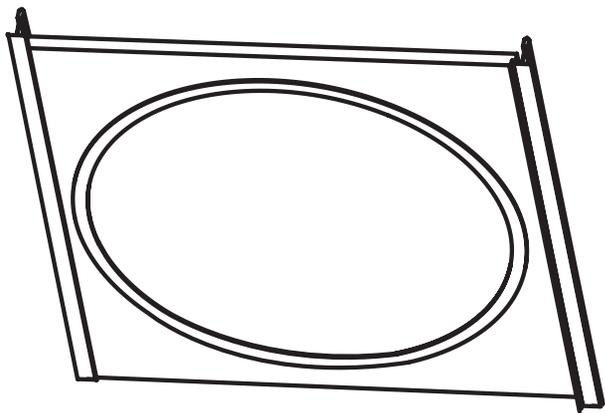



# FINA

## 60" and 72" Grid Ceiling Mount

[Return to Main Menu](#)



**Note: Fina requires at least 2 people to install. Note: It is the responsibility of the installer to make sure the lens is engaged.**

### Step 1: Mounting Prep

1. Install threaded rod (by others) to structure using below dimensions for rod locations.

### Step 2: Installing the fixture

1. Lift fixture up so threaded rod lines up with mounting holes.
2. Slide fixture up so threaded rod is inside fixture. (threaded rod should not protrude more than 3/4" into fixture)
3. Attach hex nuts (by others) to threaded rod and level.

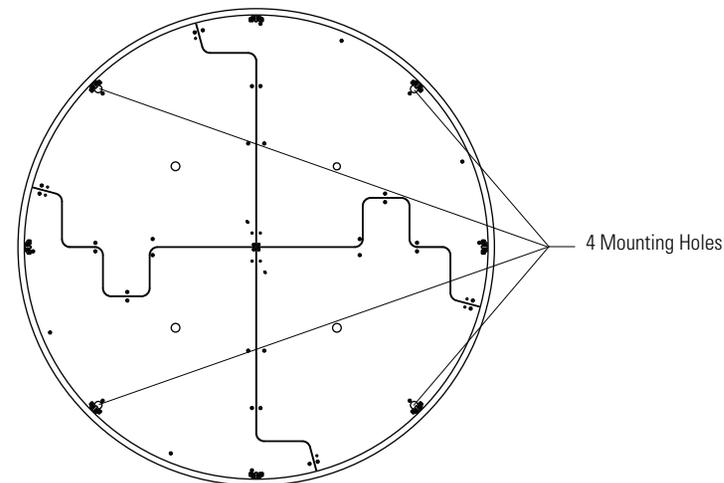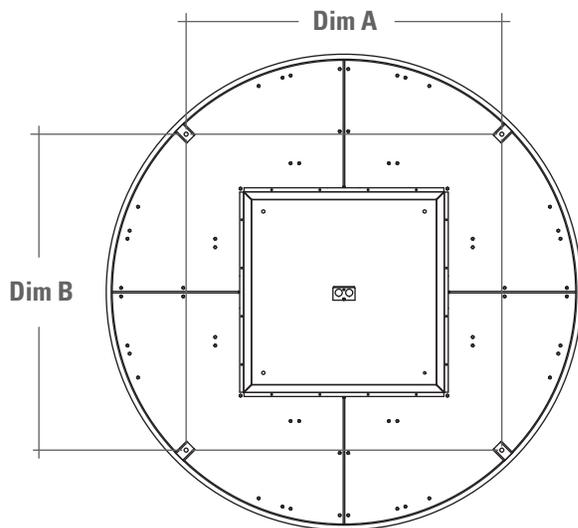

	F60	F72
A	39-5/16"	47-13/16"
B	39-5/16"	47-13/16"


	Flange	Cut Out
F60	59-3/16"	58-1/2"
F72	71-3/16"	70-9/16"

\*Top of Fixture

\*Inside of Fixture



1. This product must be installed in accordance with applicable installation and electrical codes by a professional familiar with the construction and operation of the product.
2. Minimum 90°C supply conductors.
3. All electrical connections must be performed by a certified electrician to applicable local and national electrical codes.
4. Contact Pinnacle prior to making any fixture alterations.
5. Contact Pinnacle with any installation questions or field issues.



# FINA

## 60" and 72" Grid Ceiling Mount

Return to  
Main Menu

**Note: Fina requires at least 2 people to install. Note: It is the responsibility of the installer to make sure the lens is engaged.**

### Step 3:



#### Making the Connections

1. Install four (4) tie wires near center of fixture for added support, and to keep fixture from bowing.
2. Remove electrical access cover on back of fixture in center.
3. Make all necessary connections and recess wires back into fixture. Re-attach electrical cover.

### Step 4:

#### Finishing


1. Once fixture is installed and level, install fixture lens by lifting it into the fixture and twisting it to engage notches in lens.

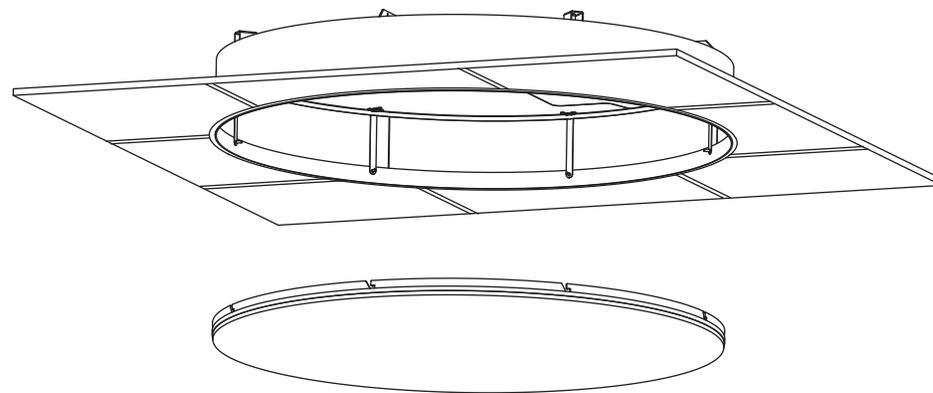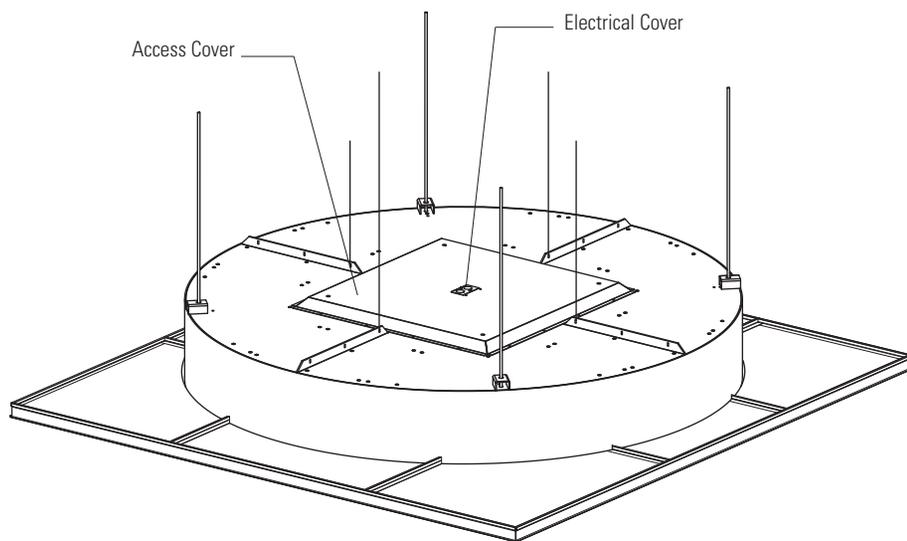


1. This product must be installed in accordance with applicable installation and electrical codes by a professional familiar with the construction and operation of the product.
2. Minimum 90°C supply conductors.
3. All electrical connections must be performed by a certified electrician to applicable local and national electrical codes.
4. Contact Pinnacle prior to making any fixture alterations.
5. Contact Pinnacle with any installation questions or field issues.



# FINA RECESSED FLANGED MOUNT INSTALLATION

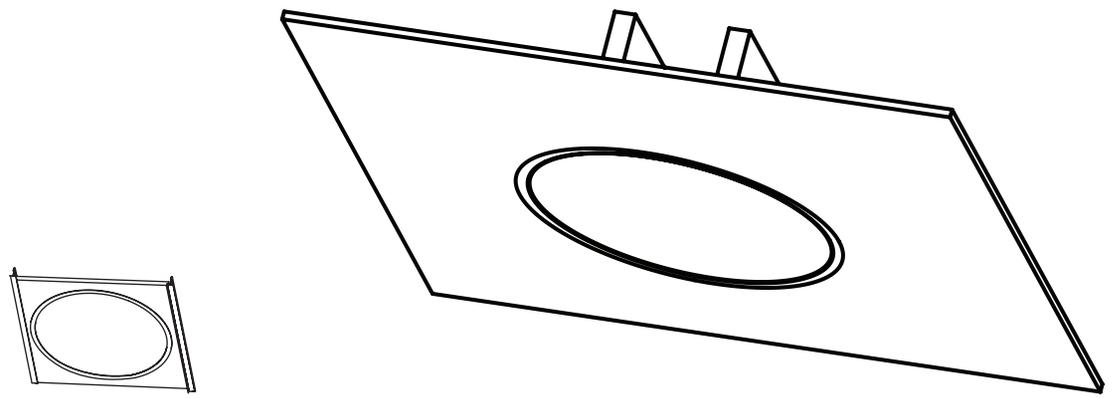



# FINA 60" and 72" Flanged Mount

Return to  
Main Menu


**Note: Fixture should be installed prior to ceiling, requires at least 2 people to install. Note: It is the responsibility of the installer to make sure the lens is engaged.**

## Step 1: Mounting Prep


1. Install support for mounting fixture recessed into drywall.  
(note: fixture is 9-1/2" tall from flange to top)
2. Needs to mount using eight (8) mounting holes.  
(see chart below for hole location.)

## Step 2: Installing the fixture

1. Lift fixture up so mounting holes line up with installed support.
2. Using all eight (8) mounting holes to secure fixture into place.

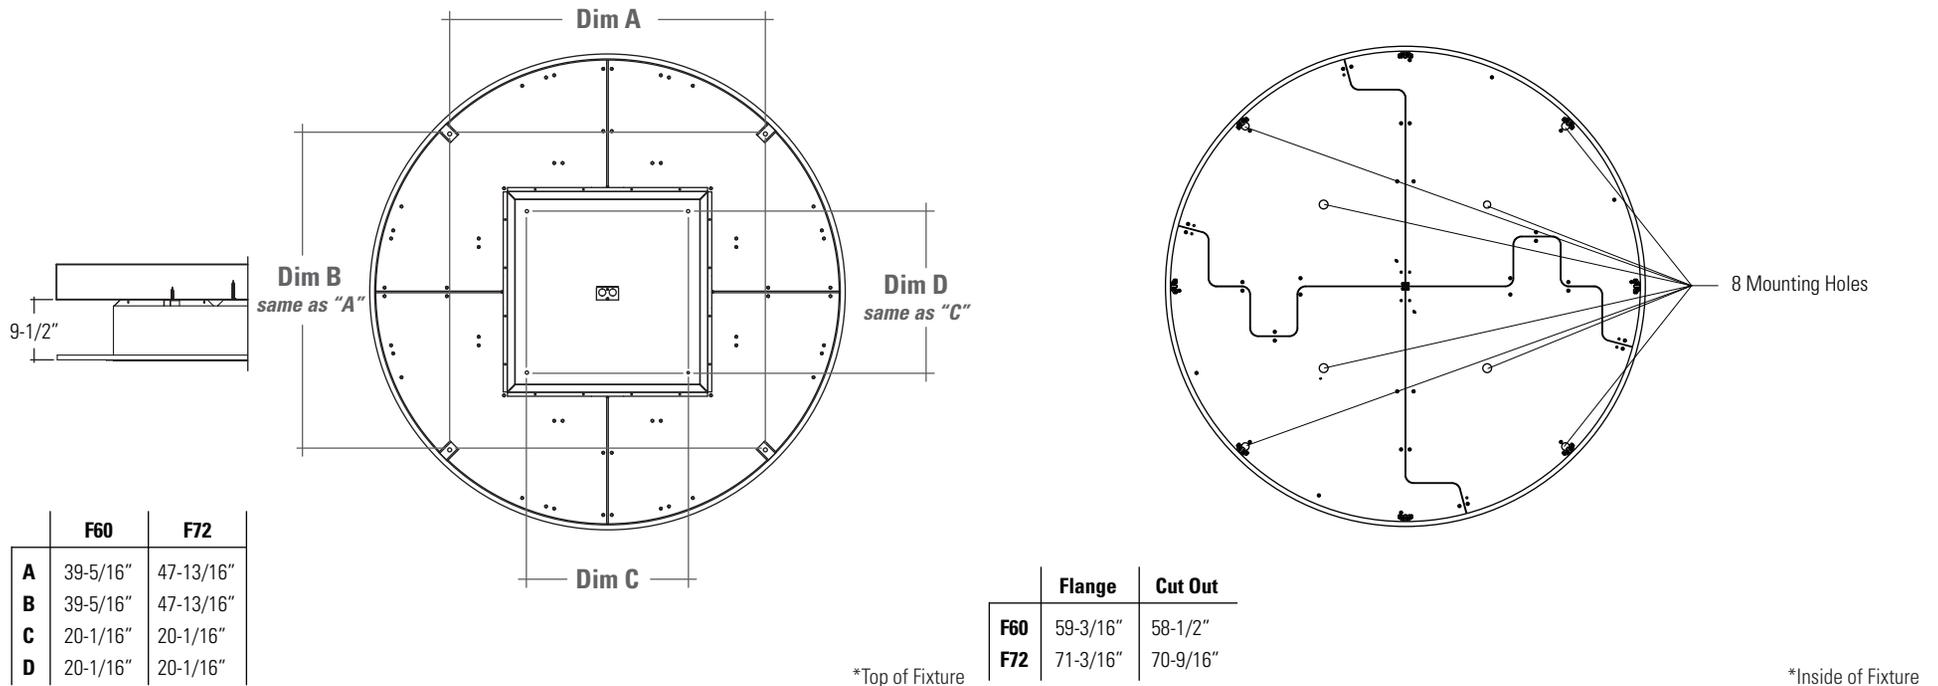

1. This product must be installed in accordance with applicable installation and electrical codes by a professional familiar with the construction and operation of the product.
2. Minimum 90°C supply conductors.
3. All electrical connections must be performed by a certified electrician to applicable local and national electrical codes.
4. Contact Pinnacle prior to making any fixture alterations.
5. Contact Pinnacle with any installation questions or field issues.



# FINA 60" and 72" Flanged Mount

Return to  
Main Menu



**Note: Fixture should be installed prior to ceiling, requires at least 2 people to install. Note: It is the responsibility of the installer to make sure the lens is engaged.**

## Step 3: Making the Connections

1. Once fixture is installed remove electrical cover on top of fixture in center.
2. Make all necessary wiring connections and recess wires back into fixture.
3. Re-attach electrical cover.

## Step 4: Finishing

1. Install 4 caps to cover center mounting holes.
2. Re-install lens by lifting it into the fixture and twisting it to engage notches in lens.

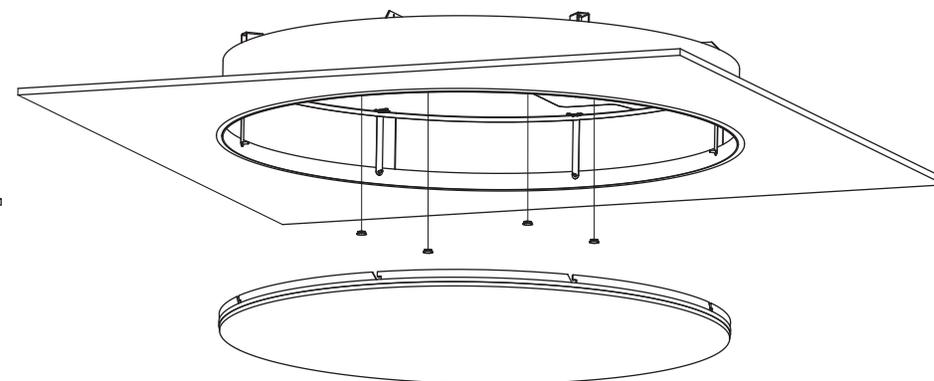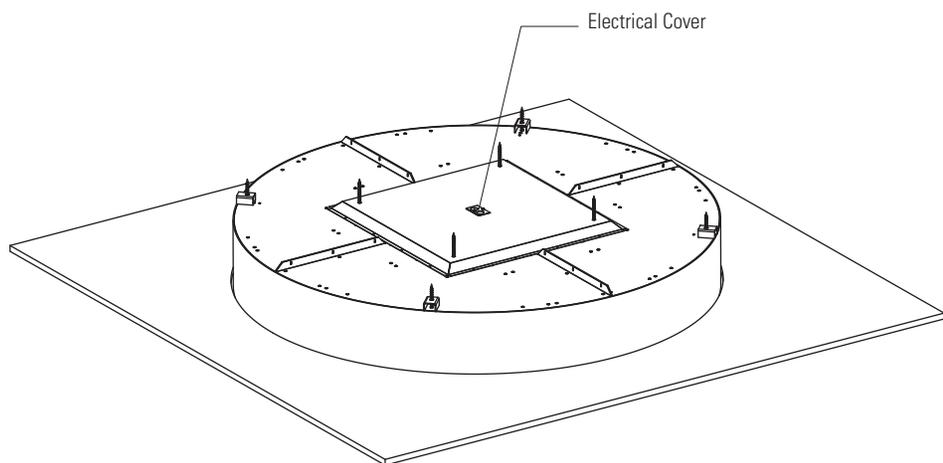



\*Support not shown for clarity




1. This product must be installed in accordance with applicable installation and electrical codes by a professional familiar with the construction and operation of the product.
2. Minimum 90°C supply conductors.
3. All electrical connections must be performed by a certified electrician to applicable local and national electrical codes.
4. Contact Pinnacle prior to making any fixture alterations.
5. Contact Pinnacle with any installation questions or field issues.



# FINA RECESSED SPACKLE FLANGE MOUNT INSTALLATION

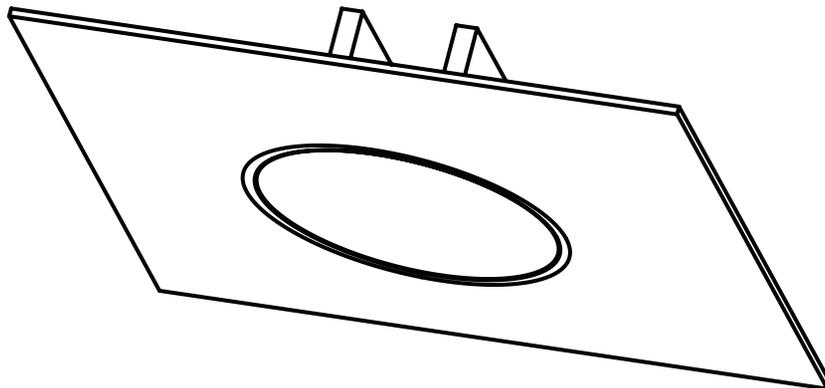



# FINA 60" and 72" Spackle Flange Mount

Return to  
Main Menu


**Note:** Fixture should be installed prior to ceiling, requires at least 2 people to install. **Note:** It is the responsibility of the installer to make sure the lens is engaged.

## Step 1: Mounting Prep


1. Install support for mounting fixture recessed into drywall.  
(note: fixture is 9-1/2" tall from flange to top)
2. Needs to mount using eight (8) mounting holes.  
(see chart below for hole location.)

## Step 2: Installing the fixture

1. Lift fixture up so mounting holes line up with installed support.
2. Using all eight (8) mounting holes secure fixture into place.

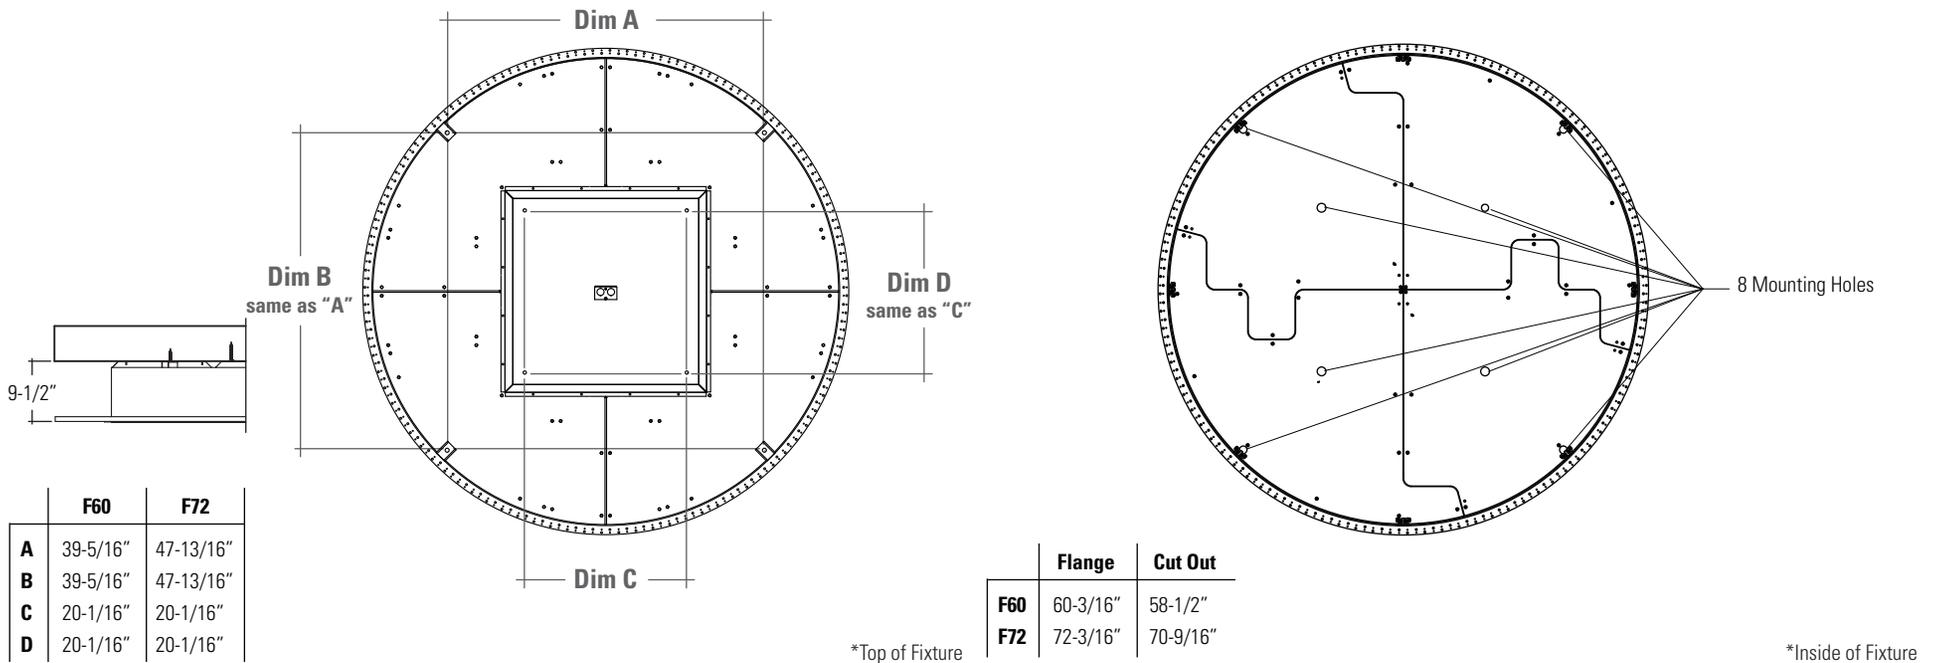

1. This product must be installed in accordance with applicable installation and electrical codes by a professional familiar with the construction and operation of the product.
2. Minimum 90°C supply conductors.
3. All electrical connections must be performed by a certified electrician to applicable local and national electrical codes.
4. Contact Pinnacle prior to making any fixture alterations.
5. Contact Pinnacle with any installation questions or field issues.




# FINA 60" and 72" Spackle Flange Mount

Return to  
Main Menu

**Note: Fixture should be installed prior to ceiling, requires at least 2 people to install. Note: It is the responsibility of the installer to make sure the lens is engaged.**



## Step 3: Making the Connections

1. Once fixture is installed remove electrical cover on top of fixture in center.
2. Make all necessary wiring connections and recess wires back into fixture.
3. Re-attach electrical cover.

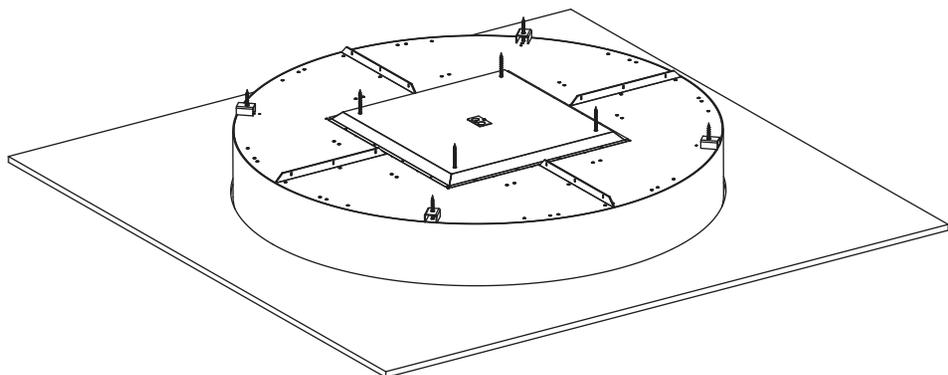

## Step 4: Finishing

1. Once installed attach screws through Spackle Flange to surface as needed to flush flange to surface.
2. Mud over flange and finish accordingly.
3. Install 4 caps to cover center mounting holes.
4. Re-install lens by lifting it into the fixture and twisting it to engage notches in lens.

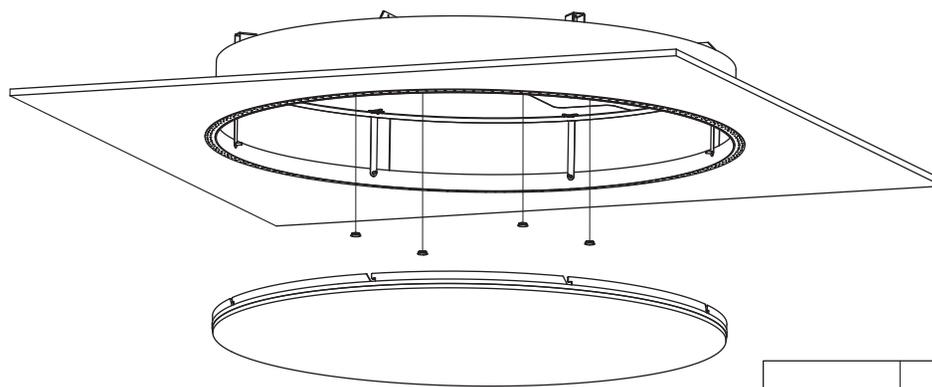

1. This product must be installed in accordance with applicable installation and electrical codes by a professional familiar with the construction and operation of the product.
2. Minimum 90°C supply conductors.
3. All electrical connections must be performed by a certified electrician to applicable local and national electrical codes.
4. Contact Pinnacle prior to making any fixture alterations.
5. Contact Pinnacle with any installation questions or field issues.