



Test # 202270  
Lamp: (1) 54 Watt T5HO  
Total Luminaire Efficiency: 95.5%




Test # 202271  
Lamp: (1) 32 Watt T8  
Total Luminaire Efficiency: 77.8%



Test # 202272  
Lamp: (2) 54 Watt T5HO  
Total Luminaire Efficiency: 90.0%

FEATURES AND OPTIONS

• EXTERNAL BAFFLE

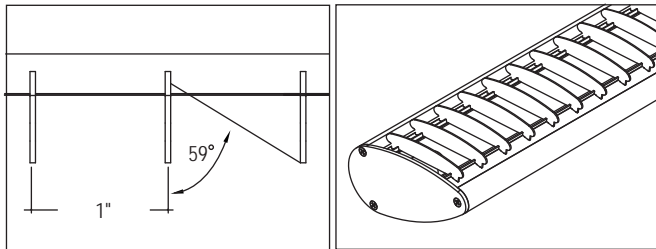


Application: External Baffle controls glare and reduces light output by 15%. Recommended when lengthwise shielding of lamp is required.

Construction: Curved baffles are high reflective white painted aluminum blades. Blade height is 5/8" and spaced 1" on center. Baffles are field installed and feature a snap in attachment allowing for easy lamp replacement.

Ordering Information: Indicate "B" in the Options section of the part number. (Sample Catalog #: V-1T5HO-4-AC48JB-120-W-B).

Restriction: External Baffle is not available in conjunction with Acrylic Lens.

• ACRYLIC LENS

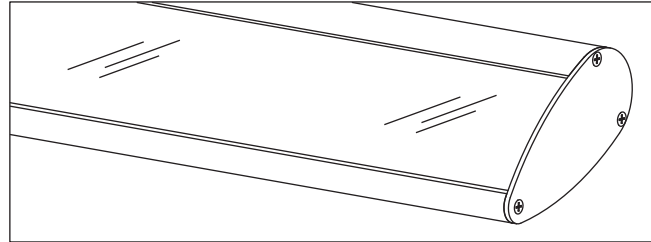


Application: Acrylic lens prevents particle ingress for interior environments.

Construction: One-piece UV stabilized curved linear prismatic acrylic lens. Acrylic lens is removable allowing for easy lamp replacement.

Ordering Information: Indicate "A" in the Options section of the part number. (Sample Catalog #: V-1T5HO-4-AC48JB-120-W-A).


Restriction: Acrylic lens is not available in conjunction with External Baffle.

• MOUNTING DETAIL (AC\_JB)

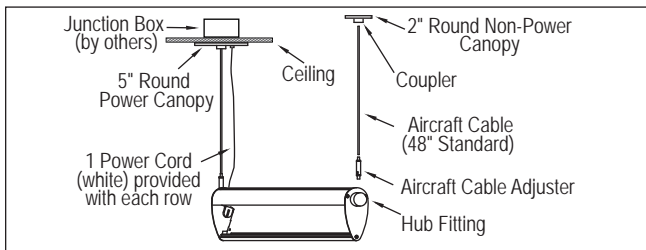

Assembly: Aircraft Cable is fed through coupler and then through the adjuster. Position canopy on ceiling and screw coupler into ceiling. Canopy is secured between the coupler and ceiling. Hub fits over fixture bushing and secured using 2 set screws. Aircraft Cable Adjuster screws into hub. As a standard, one white power cord is provided with each row. The power cord is secured through the back of the fixture head with a strain relief. A 5" canopy is provided for each power mount and 2" canopies are provided for all non-power mounts.

• MOUNTING DETAIL (AC\_ST)

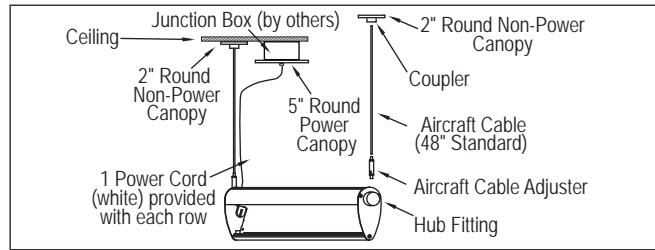

Assembly: Aircraft Cable is fed through coupler and then through the adjuster. Position canopy on ceiling and screw coupler into ceiling. Canopy is secured between the coupler and ceiling. Hub fits over fixture bushing and secured using 2 set screws. Aircraft Cable Adjuster screws into hub. As a standard, one white power cord is provided with each row. The power cord is secured through the back of the fixture head with a strain relief. A 5" and 2" canopy are provided for each power mount and 2" canopies are provided for all non-power mounts.

Individual Length	Nominal Row Length																																									
	3	4	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42			
3	1			1		3	2	1		1	2	1		1		1		3		1		1		1		1		1		1		1		1		1		1		1		1
4		1		1			1	2		1		1								2			1		1	1		1			1		1		1	1		1			1	
6			1							2	1				1	3		2	2	1	2		1	1			1	1			1	1			1	1		1	1		1	1
8					1							1	1	2	1		2	1		2		3	2	2	3	3	2	3	3	4	3	3	4	4	4	4	3	4	4	5	4	4