



Test # 202270
Lamp: (1) 54 Watt T5HO
Total Luminaire Efficiency: 95.5%




Test # 202271
Lamp: (1) 32 Watt T8
Total Luminaire Efficiency: 77.8%



Test # 202272
Lamp: (2) 54 Watt T5HO
Total Luminaire Efficiency: 90.0%

FEATURES AND OPTIONS

• EXTERNAL BAFFLE

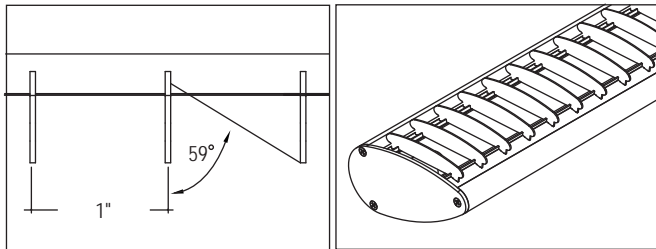


Application: External Baffle controls glare and reduces light output by 15%. Recommended when lengthwise shielding of lamp is required.

Construction: Curved baffles are high reflective white painted aluminum blades. Blade height is 5/8" and spaced 1" on center. Baffles are field installed and feature a snap in attachment allowing for easy lamp replacement.

Ordering Information: Indicate "B" in the Options section of the part number. (Sample Catalog #: V-1T5HO-4-PH12-120-W-B).

Restriction: External Baffle is not available in conjunction with Acrylic Lens.

• ACRYLIC LENS

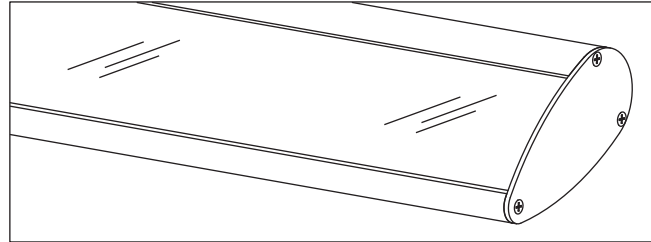


Application: Acrylic lens prevents particle ingress for interior environments.

Construction: One-piece UV stabilized curved linear prismatic acrylic lens. Acrylic lens is removable allowing for easy lamp replacement.

Ordering Information: Indicate "A" in the Options section of the part number. (Sample Catalog #: V-1T5HO-4-PH12-120-W-A).

Restriction: Acrylic lens is not available in conjunction with External Baffle.

• MOUNTING DETAIL

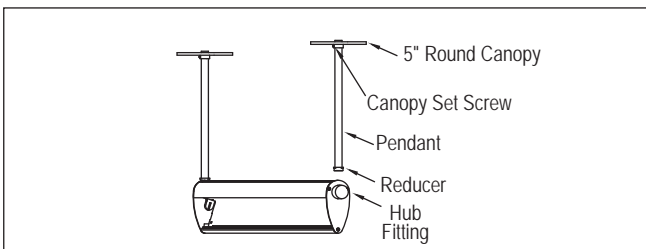

Assembly: Pendant screws into crossbar of junction box. Secure canopy with set screw. Hub fitting screws onto pendant. Fixture wires are fed through pendant. Hub fits over fixture bushing and secured using 2 set screws.

Individual Length	Nominal Row Length																																										
	3	4	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42				
3	1			1		3	2	1		1	2	1		1		1	3		1		1		1		1		1		1		1		1		1		1		1		1		
4		1		1			1	2		1		1						2			1		1	1		1			1		1		1	1	1		1			1			
6			1						2	1				1	3		2	2	1	2		1	1			1	1			1	1			1	1			1	1			1	1
8					1							1	1	2	1		2	1		2		3	2	2	3	3	2	3	3	4	3	3	4	4	4	3	4	4	5	4	4		