




FACTORY DRAWING AND SIGN OFF REQUIRED WITH THIS PRODUCT.



CUBRA CU3AJ

3" Direct and Indirect Linear
with Alternating Joint

Key Features

- Ultra-Slim 3/4" profile
- 6" extruded aluminum housing with 3" aperture
- Direct illuminated luminaire utilizes light guide plate (LGP) for high optical efficiency
- Batwing and Lambertian optics deliver quality light while maintaining visual continuity
- Up to 1000 lumens per ft and up to 128 LPW
- Up to 18 ft on center spacing with batwing optic and 14 ft with lambertian
- Design patterns with non-illuminated connectors
- Select from flat or rounded end cap designs
- 3/16" wide Alternating Joint allows for combination of direct and indirect light in your space



Example Part #: CU3AJ-A-835HO-24'-CAC48G1-U-FSD-1-0-W

CU3AJ - SHIELDING - CRI, CCT & OUTPUT - LENGTH OR PATTERN - MOUNTING - VOLTAGE - REMOTE DRIVER - CIRCUITING - BATTERY & EMERGENCY - FINISH - FIXTURE OPTIONS - CONTROLS


HOUSING	SHIELDING	CRI, CCT & OUTPUT ¹	LENGTH OR PATTERN ²
CU3AJ - Cubra 3 with Alternating Joint <i>For straight runs, specify overall nominal length. Use page 6 to draw out the straight run and include all alternating joints while indicating light directionality and shielding.</i>	A - Lambertian BW - Batwing <i>Indirect Shielding pg. 2</i>	_27_ - 2700K _30_ - 3000K _35_ - 3500K _40_ - 4000K CL_____ - Custom Lumens CW_____ - Custom Watts <i>CRI, CCT & Output pg. 2</i>	__ - Individual Fixture __ - Continuous Row SS - Square, Square connector SR - Square, Round connector RS_x - Rectangle, Square connector RR_x - Rectangle, Round connector US_x - U Shape, Square connector UR_x - U Shape, Round connector LS_x - L Shape, Square connector LR_x - L Shape, Round connector MOD - MOD options available <i>Length of Pattern pg. 2</i>
MOUNTING ³	VOLTAGE	REMOTE DRIVER	CIRCUITING
CAC__GX - Conductive AC to Grid CAC__JB - Conductive AC to J Box PAC__GX - Power over AC to Grid PAC__JB - Power over AC to J Box <i>Mounting pg. 2</i>	U - Universal <i>(120 thru 277V)</i> 1 - 120V 2 - 277V 3 - 347V <i>Voltage pg. 2</i>	FSD - Factory Select Driver (1%, 0-10v) PL2 - Advance Xitanium (1%, 0-10v) OL2 - Osram (1%, 0-10v) PL4 - Advance Xitanium 347v (1%, 0-10v) EE1 - eldoLED ECoDrive (1%, 0-10v) ES1 - eldoLED SOLOdrive (0%, 0-10v) LH1 - Lutron Hi-lume (1%, EcoSystem) EH1 - ERP Power (1%, 0-10v) <i>Driver pg. 2</i>	1 - Single Circuit E - Emergency (entire fixture) N - Night Light (entire fixture) <i>Circuiting pg. 2</i>
BATTERY & EMERGENCY ⁴	FINISH	FIXTURE OPTIONS ⁵	CONTROLS
0 - None FSG - Factory Select ALCR FSB - Factory Select Battery GI - Iota ETS DR GB - Bodine GTD PLL - Bodine 10W (remote) ILL - Iota 10W (remote) E - Emergency Section N - Night Light Section <i>Battery & Emergency pg. 2</i>	W - White S - Metallic Silver BL - Textured Black BR - Bronze GR - Graphite CC - Custom Color <i>Finish pg. 2</i>	ET - Tapered Endcap EF - Flat Endcap ES - Slotted Endcap EI - Inset Endcap ECC__ - Endcap color <i>Fixture Options pg. 2</i>	<i>Pinnacle is able to accommodate different control solutions from different manufacturers. Consult Factory for more information.</i>

¹When specifying CRI, CCT & OUTPUT the first _ is for specifying either **8** - 80CRI or **9** - 90CRI. The ending __ are for specifying output, example **HO** - High Output. See output charts for more information. ²Individual fixtures come in **1', 2', 3', 4', 5', 6', 7' & 8'** lengths. Continuous rows available in 1' increments. Connectors for patterns can either be closed (**C**) or open (**O**), closed is the standard if you would like the connector to be open specify by adding an **O** to the ordering code. example: if you want a square pattern with open round connectors - **SRO__** ³Specify AC Cable length, standard AC are 48" & 120" ⁴All Battery options are REMOTE ONLY. Enter quantity for Battery and Emergency, Example 2PL. ⁵Use ECC__ to specify endcap finish other than fixture finish. Fill in the "___" with a code from the FINISH section.

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



Shielding

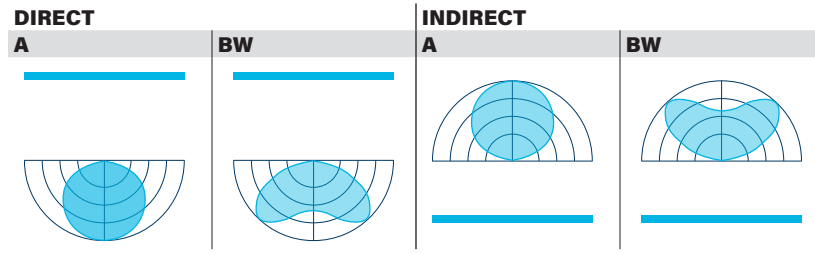

CRI, CCT & Output

- Specify either 80 or 90 CRI
- Longer lead-time may apply for 90 CRI. Consult factory
- 90 CRI = R9≥50

Custom Output - Lumens OR Wattage

CL _____	Specify CRI, CCT and desired lumens (i.e. CL835500)	Max Lumens: A = 2,000 and BW = 1,760. Max lumens dependent on color temp. Consult factory for more information
CW _____	Specify CRI, CCT and desired wattage (i.e. CW9407)	Max Watts: 16.1 watts/ft. Consult factory for more information.

80 CRI

	Color	Lumens per foot	Shielding ¹			
			A Lambertian		BW Batwing	
			LPW	Watts/ft	LPW	Watts/ft
830LO	3000K	500	115	4.3	102	4.9
830MO	3000K	750	115	6.5	101	7.5
830HO	3000K	1000	114	8.8	100	10.0
835LO	3500K	500	122	4.1	108	4.6
835MO	3500K	750	123	6.1	107	7.0
835HO	3500K	1000	121	8.3	106	9.4
840LO	4000K	500	127	3.9	112	4.5
840MO	4000K	750	128	5.9	111	6.7
840HO	4000K	1000	126	7.9	110	9.1

90 CRI

927LO	2700K	500	96	5.2	84	5.9
927MO	2700K	750	95	7.9	83	9.0
927HO	2700K	1000	94	10.6	83	12.1
930LO	3000K	500	105	4.8	92	5.4
930MO	3000K	750	104	7.2	91	8.2
930HO	3000K	1000	103	9.7	91	11.0
935LO	3500K	500	110	4.6	96	5.2
935MO	3500K	750	109	6.9	95	7.9
935HO	3500K	1000	108	9.3	94	10.6
940LO	4000K	500	106	4.7	93	5.4
940MO	4000K	750	105	7.1	92	8.2
940HO	4000K	1000	104	9.6	92	10.9

¹LPW and watts/ft based off 47" fixture size.

Length

- All individual units are not intended to be joined.
- Flat endcap adds 3/8" per end, all other add 1-1/4" per end.

1	2	3	4	5	6	7	8	-
Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Cont. Run
12" (304.8mm)	24" (609.6mm)	36" (914.4mm)	48" (1219.2mm)	60" (1524mm)	72" (1828.8mm)	84" (2133.6mm)	96" (2438.4mm)	Specify nominal overall row length to the 1'

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568

CU3AJ_LED_SPEC_MARCH2023



Patterns

- Specify open (O) or closed (C) connector when ordering.
Example: SRO4 - 4' Square Rounded Open connector
- Specify pattern shape and requested fixture length
- Length specified will not reflect overall pattern dimensions
- All connectors are NON ILLUMINATED
- Minimum length for any single part of a pattern is 1'
- All lengths are TO THE FOOT ONLY
- Driver/Battery Count dictated by product configuration
- Example part number: CU3D-A-835HO-RSO3x4-CAC48JB-U-FSD-1-0-W

SS __	SR __	RS _x_	RR _x_	US _x_	UR _x_	LS _x_x_	LR _x_x_
Square, Square Connector Provide A dimension Example: SSO4'	Square, Round Connector Provide A dimension Example: SRO4'	Rectangle, Square Connector Provide AxB dimensions Example: RSO4'x3'	Rectangle, Round Connector Provide AxB dimensions Example: RRO4'x3'	U-Shape, Square Connector Provide AxBxC dimensions Example: USO4'x3'x4'	U-Shape, Round Connector Provide AxBxC dimensions Example: URO4'x3'x4'	L-Shape, Square Connector Provide AxB dimensions Example: LSO4'x3'	L-Shape, Round Connector Provide AxB dimensions Example: LRO4'x3'


Patterns: MOD Options

- Specify **MOD** in the part number for any of the below options
- MOD specifications are subject to longer lead-times. Consult factory for more information

X	X Connector
Y	Y Connector
T	T Connector
120	120° Connector
135	135° Connector

Non-illuminated Connector Details

Specify open (O) or closed (C) connector when ordering.
Example: SRO4 - 4' Square Rounded Open Connector

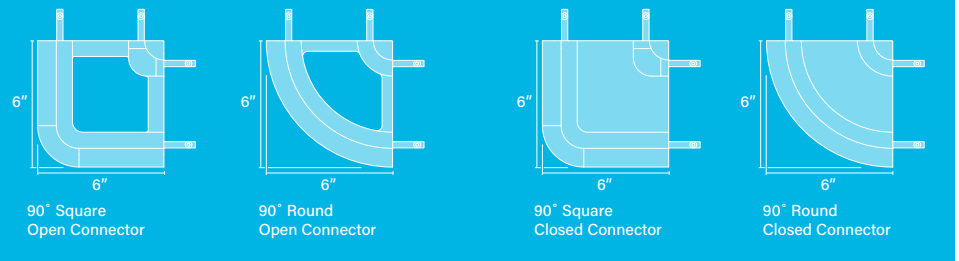

Mounting


- Specify cable length in ordering code example: PAC48JB
- Standard specifiable lengths are 48", 120", 240" and 350"
- Canopies are painted to match fixture finish, power cords are white, grey, or black depending on fixture finish. See Finish section for additional details
- PAC NOT rated for dry/damp

- Refer to installation instructions during installation at the job site
- Maximum fixture weight is 12 lbs for a standard 4' fixture
- Remote box will be included for all specifications
- Output limitations exist with Power over AC (PAC). Consult factory.



CAC __ G	Conductive AC to Grid (specify grid type: G1, G9, GS)
CAC __ JB	Conductive AC to Junction Box
PAC __ JB	Power over Aircraft Cable Junction Box
PAC __ ST	Power over Aircraft Cable Structure

CAC Canopy Details

- CAC is an integrated power and suspension cable that is smaller in diameter than a traditional SJT cable. CAC is 2 conductive cables and suspension, standard power cable (SJT) is 5 conductive cables and no suspension.



- A larger power side canopy allows for adjustability of the CAC cable inside of the canopy.

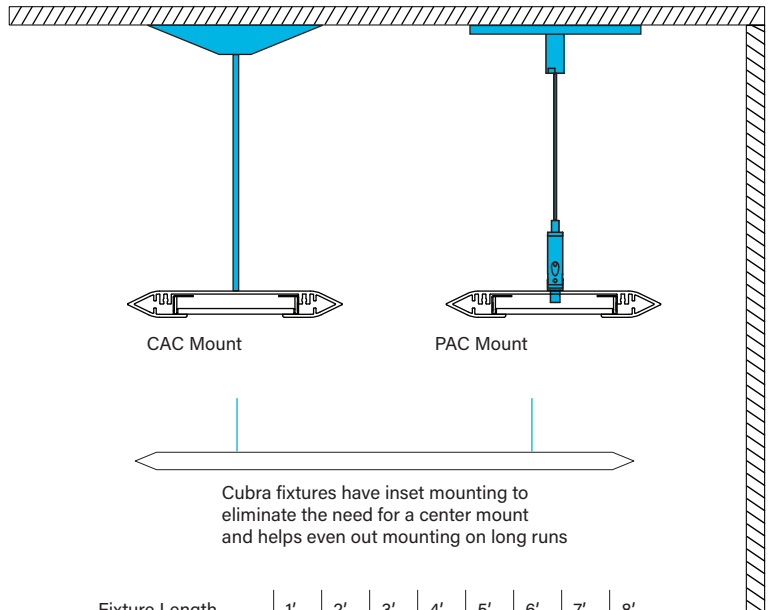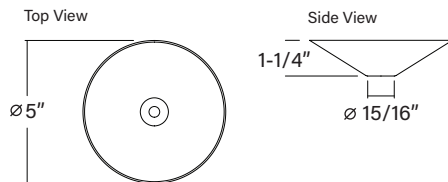

Fixture Length	1'	2'	3'	4'	5'	6'	7'	8'
Center to Center Mount	8"	20"	2'	2'	4'	4'	4'	4'



Voltage

- Some CUBRA configurations will not accommodate all voltage options; consult with factory

U	Universal
1	120 volt
2	277 volt
3	347 volt

Remote Driver

- Driver/Battery Count dictated by product configuration
- Standard Driver Option = FSD
- Driver Lifetime: 50,000 hours at 25°C ambient operating conditions
- For more driver options, see Pinnacle Resource Guide
- Some CUBRA configurations will not accommodate all driver options; consult with factory
- Configurations with no PLL, ILL or Emergency Control Device options will use Slim Remote Box
- All others will use Standard Remote Box

0-10V Drivers

FSD	Factory Select Driver (1%, 0-10v)
PL2	Advance Xitanium 1%, 0-10v
PL4	Advance Xitanium 1%, 0-10v, requires 347v option
OL2	Osram Optotronic, 1%, 0-10v
OL4	Osram Optotronic 347v, 1% 0-10v, requires 347v option
EE1	eldoLED ECOdrive 1%, 0-10v Logarithmic
EE2	eldoLED ECOdrive 1%, 0-10v Linear
ES1	eldoLED SOLOdrive 0-10v, 0% Logarithmic
ES2	eldoLED SOLOdrive 0-10v, 0% Linear


DALI Drivers

EE3	eldoLED SOLOdrive .1%, DALI (logarithmic)
EE4	eldoLED SOLOdrive .1%, DALI (linear)


Lutron Drivers

LH1	Lutron Hi-lume Soft-on, Fade-to-black 1%, EcoSystem, LDE1
LH4	Lutron Hi-Lume 1%, 2-wire, Lutron-LTEA2W, 120v only

Slim Remote Box



Standard Remote Box



How to specify Circuiting, Battery and Emergency

- Select fixture circuiting from options below
 - Some CUBRA configurations will not accommodate all circuiting options, consult with factory

Circuiting

1	Single Circuit
E	Emergency Circuit only
N	Night Light Circuit only

- Battery and emergency section options are available in addition to fixture circuit
 - Select battery and emergency section options below; factory shop drawing required
 - Some CUBRA configurations will not accommodate all circuiting options, consult with factory

Battery and/or Emergency If Required

- 0** No battery or specific emergency section required

Battery

- Select battery section type if required, indicate total QTY. *Example 2PL*
- 90 minute battery runtime; test button is remote to fixture

- For more battery options available, see Pinnacle Resource Guide
- ALL battery options are REMOTE ONLY

0	No battery
_FSB	Factory Select Battery (10w option, remote in box)
_FSBST	Factory Select Battery (Self Testing, remote in box)
_ILL	lota 10w Integral (low profile, remote in box)
_IRC	lota 10w Integral (remote with conduit)
_PLL	Philips Bodine 10w Integral (low profile, remote in box)
_PRC	Philips Bodine 10w Integral (remote with conduit)

For Approximate Battery Lumen Output

- Multiply battery wattage X fixture LPW shown on Lumen Table
- 92.3 (LPW) x 10 (watts) = 923 battery lumen output

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568

CU3AJ_LED_SPEC_MARCH2023



Emergency

- Select emergency section type if required, indicate total QTY. *Example 1E*
- Combine battery and emergency section ordering codes if both options are selected
- For use when specifying sections in continuous runs

_FSG	Factory Select ALCR, Automatic Load Control Relay, UNV
_GI	Iota ETS DR, Emergency Lighting Control Device, UNV
_GB	Bodine GTD, Emergency Lighting Control Device, 120v or 277v
_E	Emergency circuit
_N	Night Light circuit

Battery OR Emergency Ordering Examples

- Single circuit, 10w Integral Battery Ordering Code: 1-1PL
- Emergency only, 10w Integral Battery Ordering Code: E-1PL
- Single circuit, GTD required Ordering Code: 1-1G

Combination Section Ordering Examples

- Single circuit, (1) 10w battery, (1) emergency section
Ordering Code: 1-1PL1E
- Multi circuit, (2) 10w battery, (2) emergency sections
Ordering Code: M-2PL2E
- Single circuit, (1) night light section
Ordering Code: 1-1N

Finish


- Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes
- Selecting a fixture finish other than white may impact lumen output; consult factory for more information

W	White
S	Metallic Silver
BL	Textured Black
GR	Graphite
BR	Bronze
CC	Custom Color

Fixture Options

- Additional options to enhance the fixture and finish of the product


ET	Tapered Endcap
EF	Flat Endcap
ES	Slotted Endcap
EI	Inset Endcap
ECC	Endcap Color

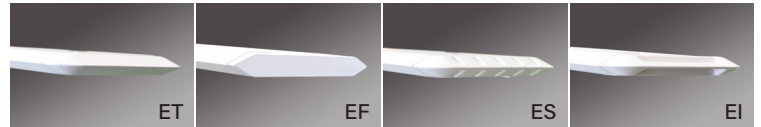

Photometrics

Lambertian

Test #	L012210105
Catalog #	CU3D-A-840-4
Lumens	4342 lm
Watts	34.5 W
Efficacy	126 LPW



Candela Distribution

Vert Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	1067	1067	1067	1067	1067
5	1068	1067	1067	1066	1066
10	1070	1070	1066	1064	1062
15	1075	1072	1065	1058	1055
20	1080	1075	1062	1049	1043
25	1085	1077	1056	1036	1027
30	1086	1075	1046	1018	1005
35	1083	1068	1030	993	976
40	1071	1052	1006	960	940
45	1048	1026	971	918	895
50	1009	985	924	864	839
55	953	927	863	799	771
60	876	850	784	719	690
65	777	753	687	623	594
70	657	634	573	512	482
75	519	499	443	389	359
80	363	352	309	268	244
85	210	202	178	145	114
90	0	0	0	0	0

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	17324	16051	14795
55	19421	17587	15712
65	21491	19001	16429
75	23439	20007	16213
85	28164	23873	15289

For all available IES files, please visit our website at pinnacle-ltg.com. Photometry testing in accordance to IESNA-LM-79-08 at an NVLAP accredited testing laboratory. Testing conducted at 25°C ambient conditions

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



Multi Connector Layout

- Use the below to sketch your desired pattern. Available fixture and connectors are listed in the legend. Label your pattern components according to legend to simplify specification.
- Label the linear sections with length, and light direction - Direct (**D**) or Indirect (**I**), and shielding - Lambertian (**A**) or Batwing (**BW**); example 4D-A would be 4' Direct with Lambertian Lens.
- Cannot connect a connector to another connector.
- Fixtures available in 1', 2', 3', 4', 5', 6', 7', and 8' lengths. All lengths are TO THE FOOT ONLY.

Joint

Direct Light Indirect Light

3/16"

AJ
Alternating Joint

6" 6" 6" 6"


90° Square Open Connector 90° Round Open Connector 90° Square Closed Connector 90° Round Closed Connector

How to draw it out:

6' D-BW 6' I-A 6' D-BW

Joint Joint

Example Part Number using Alternating Joint:
CU3AJ-A-BW-830-18'-CAC48JB-U-FSD-1-0-W-ET

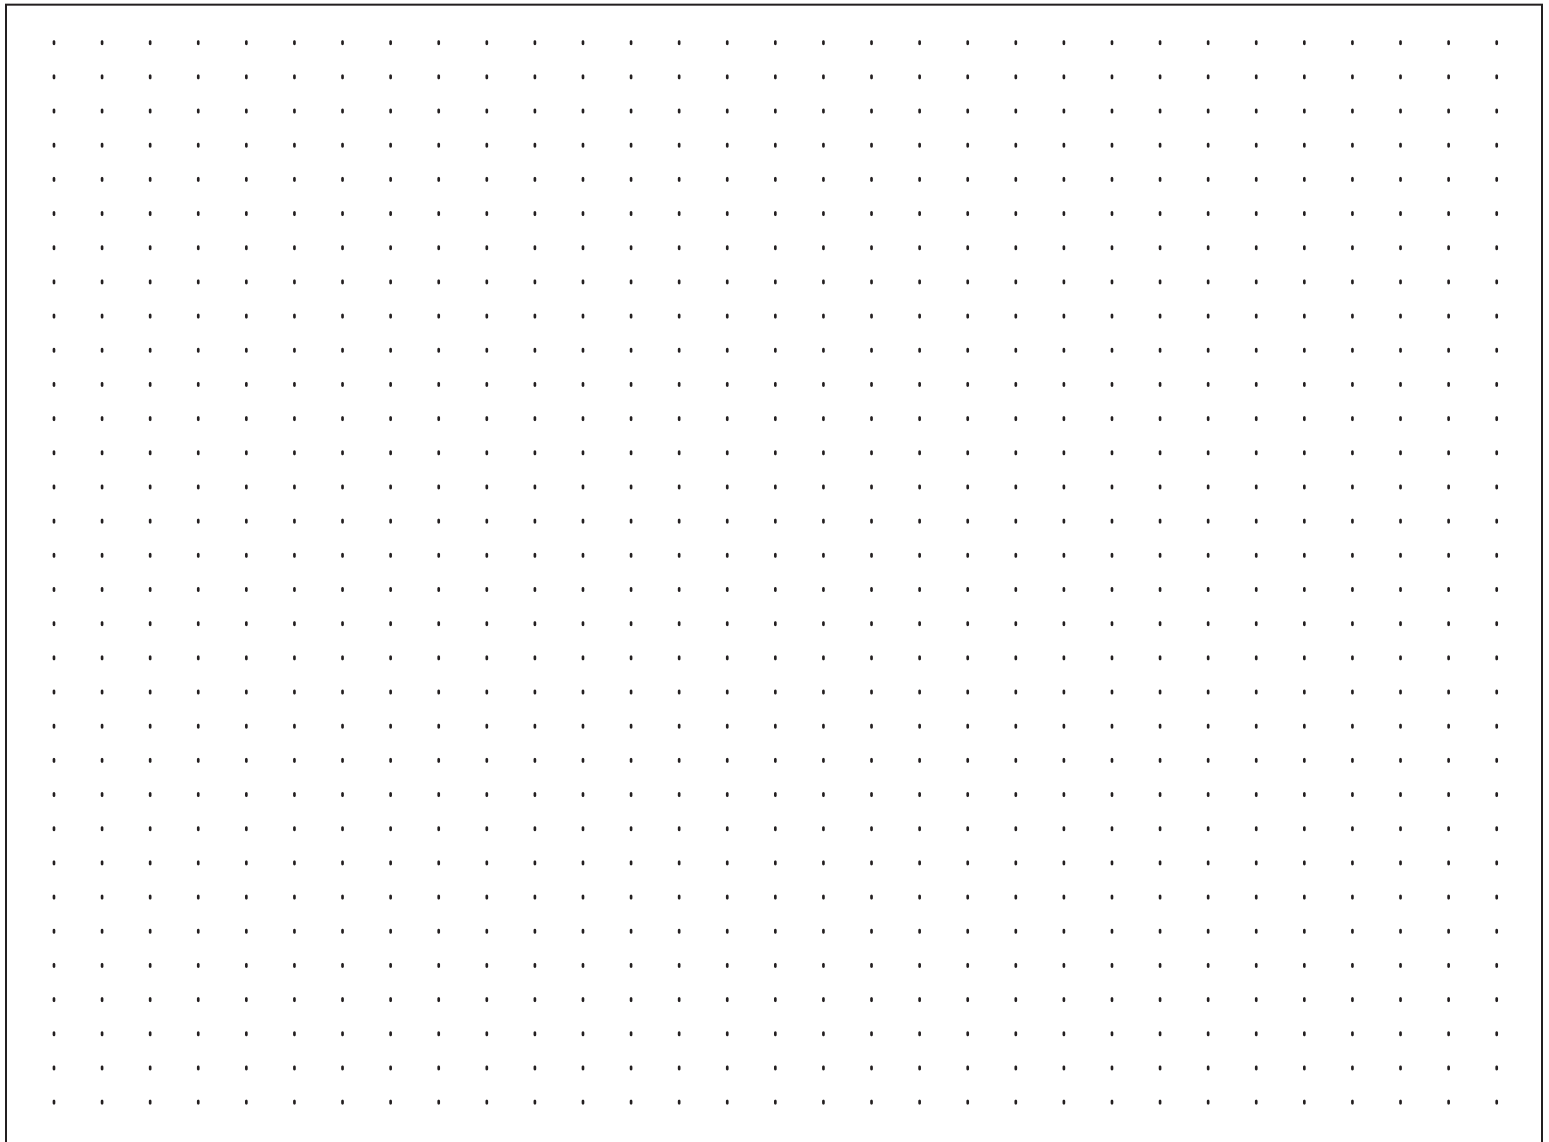

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



Approvals & Certifications

Construction: 6063-T6 Extruded aluminum housing. Diecast aluminum endcaps.

Shielding: Direct distribution utilizes light guide plate technology (LGP). Single or dual side light is transmitted through the clear, acrylic engraved structure and controlled by highly reflective reflector material to achieve high optical efficiency. Specify between Lambertian (A) or Batwing (BW) optical distributions.

Mounting: Conductive Aircraft Cable (CAC) and Power over AC (PAC) mount available. Power mount supplied with conductive aircraft cable and round canopy 5" diameter that narrows to 15/16" and 1-1/4" tall. Non-power supplied with aircraft cable and 2" (50.8mm) canopy. Each fixture consists of two mounting points inset from the ends. 2', 3' and 4' are spaced 2ft apart and 5', 6', 7' and 8' are 4ft apart. Refer to installation instructions for appropriate ceiling and mounting detail. Canopies are painted white unless otherwise specified.

LED: 25°C test environment. Lumen output/wattage has a margin of +/- 5%; 2' or 3' lengths may have a greater wattage deviation. Luminaire configurations tested in accordance with IES LM-79. Diodes tested in accordance with IES LM-80. Lifetime calculated using IES TM-21. Minimum lifetime greater than 60,000 hours. Calculated L70 = 238,000 hours and calculated L90 = 71,200 hours. MacAdam 3-Step Ellipses. For all available IES files, please visit our website at pinnacle-ltg.com.

CRI, CCT & Lumen Output: Three lumen packages available. Low (LO), Medium (MO) and High (HO). Custom outputs are available. Specify custom lumens or watts between standard offering listed on CRI, CCT & Output page. 80 CRI is available for 3000K, 3500K, and 4000K. 90 CRI is available for 2700K, 3000K, 3500K, and 4000K. 90 CRI = R9≥50

Voltage: Universal (U), 120 volt (1), 277 volt (2) and 347 volt (3) options available. Must specify PL4 or OL4 in Driver section when 347 volt (3) is selected. Some CUBRA configurations will not accommodate all voltage options; consult with factory.

Remote Driver: Standard Driver option is Factory Select Driver (FSD). FSD driver specification = 0-10V, 1% dimming. Electronic driver, Power factor is >0.9 with a THD <20%. Driver Lifetime: 50,000 hours at 25°C ambient operating conditions. Ambient operating range: -20°F/-30°C to 110°F/43°C. For more driver options, see Pinnacle Resource Guide. Some CUBRA configurations will not accommodate all driver options.

Remote Mounting Guide

Distance limited by max input watts shown.

Max Distance	56' (.53A)	42' (.7A)	28' (1.05A)	20' (1.5A)	12' (2A)
4' Housing	4.8w/ft	6.4w/ft	9.5w/ft	13.4w/ft	16.3w/ft
8' Housing	2.4w/ft	3.1w/ft	4.7w/ft	6.6w/ft	8.9w/ft

Circuiting: Select from single circuit (1), Emergency circuit (E) or Night Light circuit (N). Some CUBRA configurations will not accommodate all circuiting options; consult with factory.

Remote Battery & Emergency: Select battery or emergency options if required. If battery or emergency option is not required, enter 0. Battery duration is 90 minutes as standard. Test button is remote to fixture. For more Battery options, see Pinnacle Resource Guide.

Finish: Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes. Canopies are painted to match the fixture finish (i.e. bronze fixture, bronze canopy). Contact factory for additional custom color and finish options.

Controls: Consult Factory.

Labels: UL and cUL Listed. Low, Medium and High Output lumen packages are approved for dry/ damp location unless otherwise noted.

Fixture Weight: Maximum fixture weight is 12 lbs (per 4' fixture).

Buy American Act Compliant

Warranty: CUBRA offered with a 5-year limited warranty. Covers LED, driver and fixture.