

# EDGE EX4I

## 4" Suspended Indirect Linear

### Key Features

- 6063-T6 Extruded aluminum housing
- Highly reflective = white painted reflector
- Room side maintenance for LED system
- 5-year limited warranty covers LED, driver and fixture
- ETL Listed conforming to UL1598 in US and CSA 250 in Canada
- Approved for dry/damp location unless otherwise noted
- Maximum weight is 20 lbs. for a standard 4' fixture
- Buy American Act compliant
- Run lengths Available to an 1/8"
- Indigo-Clean available, see Indigo-Clean specification sheets for details



Example Part #: EX4I-N-HE-830HO-26'-AC48G1-U-OL2-1-0-W

**EX4I** - **N** - **DIRECT SHIELDING** - **INDIRECT SHIELDING** - **CRI, CCT & SOURCE** - **LENGTH** - **MOUNTING** - **VOLTAGE** - **DRIVER** - **CIRCUITING** - **BATTERY & EMERGENCY** - **FINISH** - **FIXTURE OPTIONS**

N	---	---	---
DIRECT SHIELDING	INDIRECT SHIELDING	SOURCE <sup>1</sup>	LENGTH OR PATTERN <sup>2</sup>
<b>N</b> - None Shielding pg. 2	<b>HE</b> - High Efficiency <sup>QS</sup> <b>BW</b> - Batwing <sup>QS</sup> <b>WHE</b> - Asymmetric <sup>QS</sup> <b>HEA</b> - Ascent <b>MOD</b> - Mod options available Shielding pg. 2	<b>_27_</b> - 2700K <b>_30_</b> - 3000K <b>_35_</b> - 3500K <b>_40_</b> - 4000K <b>TW3</b> - Tunable White (Blanco 3) <b>CL</b> - Custom Lumens <b>CW</b> - Custom Watts <b>MOD</b> - Mod options available Lumen Output pg. 2-3	<b>_</b> - Individual Fixture <sup>QS</sup> <b>_</b> - Continuous Row <sup>QS</sup> <b>MOD</b> - Mod options available Length pg. 3
---	---	---	---
MOUNTING <sup>3</sup>	VOLTAGE	DRIVER	CIRCUITING
<b>_AC_G_</b> - (M) AC to Grid <sup>QS</sup> <b>_AC_JB_</b> - (M) AC to J Box <sup>QS</sup> <b>_AC_ST_</b> - (M) AC to Structure <sup>QS</sup> <b>AC5_G_</b> - 5" Non-Power Canopy <b>AC5_JB_</b> - 5" Non-Power Canopy <b>SQ_G_</b> - 5" Square Canopy <b>SQ_JB_</b> - 5" Square Canopy <b>WA</b> - Wall Mount <sup>QS</sup> <b>MOD</b> - Mod options available Mounting pg. 4	<b>U</b> - Universal (120 thru 277V) <sup>QS</sup> <b>1</b> - 120V <sup>QS</sup> <b>2</b> - 277V <sup>QS</sup> <b>3</b> - 347V Voltage pg. 4	<b>FSD</b> - Factory Select Driver (1%, 0-10v) <sup>QS</sup> <b>PL2</b> - Advance Xitanium (1%, 0-10v) <sup>QS</sup> <b>OL2</b> - Osram (1%, 0-10v) <sup>QS</sup> <b>OL4</b> - Osram 347V (1%, 0-10v) <b>EE1</b> - eldoLED ECODrive (1%, 0-10v) <b>ES1</b> - eldoLED SOLOdrive (0.1%, 0-10v) <b>LH1</b> - Lutron Hi-lume (1%, EcoSystem) <b>PR1</b> - Advance Xitanium SR <b>MOD</b> - Mod options available Driver pg. 5	<b>1</b> - Single Circuit <sup>QS</sup> <b>M</b> - Multi Circuit <b>E</b> - Emergency (entire fixture) <sup>QS</sup> <b>N</b> - Night Light (entire fixture) <sup>QS</sup> Circuiting pg. 5
---	---	---	---
BATTERY & EMERGENCY <sup>4</sup>	FINISH	FIXTURE OPTIONS <sup>5</sup>	CONTROLS <sup>6</sup>
<b>0</b> - None <sup>QS</sup> <b>FSB</b> - Factory Select Battery <b>FSG</b> - Factory Select ALCR <b>GI</b> - Iota ETS DR <b>GB</b> - Bodine GTD <b>IC</b> - Iota 10W Integral <sup>QS</sup> <b>P</b> - Bodine 10W Integral <b>E</b> - Emergency Section <b>N</b> - Night Light Section <b>L</b> - Life Safety Section Battery and Emergency pg. 5-6	<b>W</b> - White <sup>QS</sup> <b>S</b> - Metallic Silver <sup>QS</sup> <b>BL</b> - Textured Black <sup>QS</sup> <b>BR</b> - Bronze <b>GR</b> - Graphite <b>CC</b> - Custom Color Finish pg. 6	<b>QS</b> - Quick Ship <sup>QS</sup> <b>DSP</b> - Customer Supplied Battery/Driver/Sensor <b>MOD</b> - Mod options available Fixture Options pg. 6	<b>DLMFC</b> - Wattstopper DLM (wired) <b>DLMFS</b> - Wattstopper LLLC (wireless) <b>EASYS</b> - Philips EasySense (wireless) <b>SNSLM</b> - Encelium Sensilum (wireless) <b>WVLX</b> - Eaton Wavelinx (wireless) <b>VDO</b> - Lutron Vive Sensor (wireless) <b>VRF</b> - Lutron Vive Connected (wireless) <b>ENL</b> - Enlighted (wireless) <b>MOD</b> - Mod options available Controls pg. 7

<sup>1</sup>When specifying SOURCE the first \_ is for specifying either 8 - 80CRI, or 9 - 90CRI. The ending \_ are for specifying output, example HO - High Output. If specifying QS output is 80 CRI, all color temperatures, all lumen packages. Does not include Tunable White. See output charts for more information. <sup>2</sup>Individual fixtures come in 2', 3', 4', 5', 6', 7' & 8' lengths. Continuous row come in 1/8" increments. For Mod layouts specify pattern shape and overall dimensions. Example: L6x4: L pattern that is 6'x4'. <sup>3</sup>Specify AC Cable: Standard single AC = AC or Movable AC = MAC; Specify AC length standard AC is 48"; Specify grid: G1=15/16", G9=9/16", GS=Screw Slot. Example: AC48G1 4Enter quantity for Battery and Emergency, Example 2P. <sup>5</sup>QS must be used in fixture options section of part number to qualify. 1/8" increments not available for QS. LMRP option only available with 120v. <sup>6</sup>Controls can only be used with Single Circuit (1) or Emergency Circuit (E). See Controls chart on page 5 for driver options and more information.

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



## Direct Shielding

N
None

## Indirect Shielding

HE	BW	WHE	HEA
High Efficiency	Batwing Over Optic	Asymmetric Over Optic	Ascent Not available with MAC mounting

## Shielding: MOD Options

- Specify **MOD** in the part number for any of the below options
- Consult factory for MOD specification details, pricing, and lead-time information

MOD	Clear lens overlay
-----	--------------------

## Source: White LED<sup>1</sup>

- Specify either 80 or 90 CRI
- Longer lead-time may apply for 90 CRI. Consult factory
- 90 CRI = R9≥50

## Custom Output - Lumens OR Wattage

<b>CL</b> _____	Specify CRI, CCT and desired lumens (i.e. CL835500)	Specify lumens between standard offering listed below. Lumens are specified per color temp
<b>CW</b> _____	Specify CRI, CCT and desired wattage (i.e. CW9407)	Specify watts between standard offering listed below

## 80 CRI

	Color	Lumens per foot	Shielding <sup>1</sup>		BW		WHE		HEA	
			HE High Efficiency		Batwing		Asymmetric		Ascent	
			LPW	Watts/ft	LPW	Watts/ft	LPW	Watts/ft	LPW	Watts/ft
<b>830</b>	3000K	500	140	3.6	131	3.8	119	4.2	125	4.0
<b>830HO</b>	3000K	750	146	5.1	135	5.5	119	6.3	125	6.0
<b>830VHO</b>	3000K	1000	147	6.8	137	7.3	122	8.2	128	7.8
<b>835</b>	3500K	500	145	3.4	135	3.7	123	4.1	125	4.0
<b>835HO</b>	3500K	750	151	5.0	141	5.3	122	6.1	129	5.8
<b>835VHO</b>	3500K	1000	148	6.8	141	7.1	126	8.0	133	7.5
<b>840</b>	4000K	500	145	3.4	135	3.7	123	4.1	125	4.0
<b>840HO</b>	4000K	750	151	5.0	141	5.3	122	6.1	129	5.8
<b>840VHO</b>	4000K	1000	148	6.8	141	7.1	126	8.0	133	7.5

## 90 CRI

<b>927</b>	2700K	500	118	4.2	110	4.5	99	5.1	102	4.9
<b>927HO</b>	2700K	750	118	6.4	110	6.8	98	7.6	104	7.2
<b>927VHO</b>	2700K	1000	121	8.3	113	8.9	100	10.0	105	9.5
<b>930</b>	3000K	500	124	4.0	120	4.2	105	4.7	111	4.5
<b>930HO</b>	3000K	750	129	5.8	120	6.3	107	7.0	111	6.8
<b>930VHO</b>	3000K	1000	132	7.6	123	8.2	108	9.3	114	8.8
<b>935</b>	3500K	500	124	4.0	120	4.2	105	4.8	111	4.5
<b>935HO</b>	3500K	750	128	5.8	119	6.3	107	7.0	110	6.8
<b>935VHO</b>	3500K	1000	132	7.6	122	8.2	107	9.3	113	8.8
<b>940</b>	4000K	500	124	4.0	120	4.2	105	4.8	111	4.5
<b>940HO</b>	4000K	750	128	5.8	119	6.3	107	7.0	110	6.8
<b>940VHO</b>	4000K	1000	132	7.6	122	8.2	107	9.3	113	8.8



## Source: BIOS<sup>1</sup>

- CRI >84, R9 >90
- Spectrum focused lighting for circadian stimulus
- High EML or M/P ratio: .8 for 3500K, .9 for 4000K
- COI: ≤3.3
- Available for use with most Driver or Control options

## Custom Output - Lumens OR Wattage

<b>CLB</b> _____	Specify CRI, CCT and desired lumens (i.e. CL835500)	Specify lumens between standard offering listed below. Lumens are specified per color temp
<b>CWB</b> _____	Specify CRI, CCT and desired wattage (i.e. CW9407)	Specify watts between standard offering listed below

## BIOS

	Color	Lumens per foot	Shielding <sup>1</sup> <b>HE</b> High Efficiency	
			LPW	Watts/ft
<b>B35</b>	3500K	500	85	5.9
<b>B35HO</b>	3500K	750	84	8.9
<b>B35VHO</b>	3500K	1000	83	12.1
<b>B40</b>	4000K	500	87	5.7
<b>B40HO</b>	4000K	750	86	8.7
<b>B40VHO</b>	4000K	1000	85	11.7

<sup>1</sup>LPW and watts/ft based off 48" fixture size.

## Source: Blanco<sup>1</sup>

- CRI >90, R9 >92
- 3 Channel tunable white for precise black body curve CCT
- Allows for high color consistency between fixtures
- Self-commissioning with Wattstopper DLM integrated controls
- Requires Control Ordering Code **B3LM** (pg. 6)
- Requires Drive Ordering Code **EC2** (pg. 4)

## Blanco 3 Tunable White (TW3)

	Range	Shielding <sup>1</sup> <b>HE</b> High Efficiency		
		Lumens/ft	LPW	Watts/ft
<b>TW3</b>	2700- 6500K	783	92	8.5

<sup>1</sup>Lumens/ft LPW and watts/ft based off 48" fixture at full output at 4000K.

## Source: MOD Options

- Specify **MOD** in the part number for any of the below options
- All RGB\_ Source Options will require specific driver and control
- Consult factory for MOD specification details, pricing, and lead-time information

<b>MOD</b>		Required Driver	Required Control
	Color Changing RGB LED	EC1/EC4	DMX
	Color Changing RGB-W LED	EC1/EC4	DMX
	2 Channel Tunable White		

## Length

- For Continuous Runs, add 3/16" (4.7mm) for each end plate or 3/8" (9.5mm) to the overall length of the row
- BIOS and Blanco3 are only available in foot lengths

2	3	4	5	6	7	8	—
Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Cont. Run
24-3/8" (619.1mm)							Specify nominal overall row length to the 1/8" Longer lead-time may apply for lengths to the 1/8". Consult factory.
36-3/8" (934.8mm)							
48-3/8" (1228.7mm)							
60-3/8" (1533.5mm)							
72-3/8" (1838.3mm)							
84-3/8" (2143.1mm)							
96-3/8" (2447.9mm)							

Specify to the 1/8" >>>>

## Length or Pattern: MOD Options

- Specify **MOD** in the part number for any of the below options
- Consult factory for MOD specification details, pricing, and lead-time information

<b>MOD</b>	Specify MOD for patterns, lengths or angles not shown above
	45- 180 degree angles
	Single-piece welded housings up to 4' x 4

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568

EX4I\_LED\_SPEC\_APRIL2023




## Mounting


- Specify cable length in ordering code (AC48G1)
- Standard adjustable cable. Specify 48", 120", 240" or 350"
- End plates and standard white power cord attached at factory
- Aircraft cable (AC) mounts on 4" (1219.2mm) and 8" (2438.4mm) centers
- Maximum recommended movable mounting locations are 12" from end of 4' fixture and 18" from end of 8' fixture
- Aircraft Cable supplied with 5" (127mm) power and 2" (50.8mm) non-power canopies

- Canopies and pendants match fixture finish, power cords are white, grey, or black depending on fixture finish. See Finish section for additional details.
- Approved for dry/damp location unless otherwise noted
- Refer to installation instructions during installation at the job site
- Maximum fixture weight is 20 lbs for a standard 4' fixture
- MAC options not available with HEA lens option
- For a wall mounted fixture with an indirect asymmetric lens, light will be directed away from the wall as a standard

<b>AC_G1</b>	Aircraft Cable 1" (15/16") T-Bar
<b>AC_G9</b>	Aircraft Cable 9/16" T-Bar
<b>AC_GS</b>	Aircraft Cable Screw Slot T-Bar
<b>AC_JB</b>	Aircraft Cable Junction Box
<b>AC_ST</b>	Aircraft Cable Structure
<b>AC5_G</b>	Aircraft Cable 5" (127mm) Non-Power Canopy
<b>AC5_JB</b>	Aircraft Cable 5" (127mm) Non-Power Canopy
<b>SQ_G</b>	Aircraft Cable 5" (127mm) Square Canopy
<b>SQ_JB</b>	Aircraft Cable 5" (127mm) Square Canopy
<b>MAC_G1</b>	Moveable AC 1" (15/16") T-Bar
<b>MAC_G9</b>	Moveable AC 9/16" T-Bar
<b>MAC_GS</b>	Moveable AC Screw Slot T-Bar
<b>MAC_JB</b>	Moveable AC Junction Box
<b>MAC_ST</b>	Moveable AC Structure
<b>MAC5_G</b>	Moveable AC 5" (127mm) Non-Power Canopy
<b>MAC5_JB</b>	Moveable AC 5" (127mm) Non-Power Canopy
<b>MSQ_G</b>	Moveable AC 5" (127mm) Square Canopy
<b>MSQ_JB</b>	Moveable AC 5" (127mm) Square Canopy
<b>WA</b>	Wall Mount

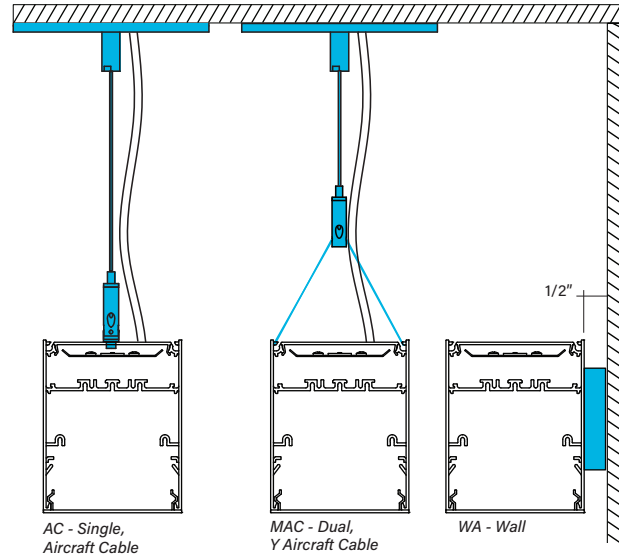

## Straight EDGE Joint System



- The Straight EDGE Joint comes standard for all runs.
- Two connection points - one to cinch fixtures together, the other to perfectly align all fixtures in a run.
- Factory-installed light shields on both sides of the fixture ensure no light leaks.
- Patented.

## Mounting: MOD Options

- Specify **MOD** in the part number for any of the below options
- Consult factory for MOD specification details, pricing, and lead-time information

<b>MOD</b>	Recessed to Suspended
------------	-----------------------

## Voltage

- Some EX2I configurations will not accommodate all voltage options; consult with factory

<b>U</b>	Universal
<b>1</b>	120 volt
<b>2</b>	277 volt
<b>3</b>	347 volt



## Driver

- Standard Driver Option = PL2
- Driver Lifetime: 50,000 hours at 25°C ambient operating conditions
- For more driver options, see Pinnacle Resource Guide
- Some EX2I configurations will not accommodate all driver options; consult with factory

### 0-10V Drivers

<b>FSD</b>	Factory Select Driver 1%, 0-10v
<b>PL2</b>	Signify Advance Xitanium 1%, 0-10v
<b>PL4</b>	Advance Xitanium 347v 1%, 0-10v, requires 347v
<b>OL2</b>	Osram Optotronic, 1%, 0-10v
<b>OL4</b>	Osram Optotronic 347v, 1% 0-10v, requires 347v option
<b>EE1</b>	eldoLED ECOdrive 1%, 0-10v Logarithmic
<b>EE2</b>	eldoLED ECOdrive 1%, 0-10v Linear
<b>ES1</b>	eldoLED SOLOdrive 0-10v, 0.1% Logarithmic
<b>ES2</b>	eldoLED SOLOdrive 0-10v, 0% Linear
<b>OL5</b>	Osram Optotronic 1%, 0-10v, AUX
<b>PL5</b>	Advance Xitanium 1%, 0-10v, AUX

### DALI Drivers

<b>EE3</b>	eldoLED ECOdrive .1%, DALI (logarithmic)
<b>ES3</b>	eldoLED SOLOdrive .1%, DALI (logarithmic)
<b>OD1</b>	Osram Optotronic 1%, DEXAL
<b>OD2</b>	Osram Optotronic 1%, DALI 2 Channel

### Lutron Drivers

<b>LH1</b>	Lutron Hi-lume Soft-on, Fade-to-black 1%, EcoSystem, LDE1
<b>LH4</b>	Lutron Hi-Lume 1%, 2-wire, Lutron-LTEA2W, 120v only

### Alternate Drivers

<b>PS1</b>	Signify Advance Xitanium Step Dimming 50%/100%
<b>PR1</b>	Philips Advance Xitanium SR, requires EASYS, VDO or VRF
<b>OD1</b>	Osram Optotronic 1%, DEXAL
<b>EH1</b>	ELV 120v only, 0-10v universal
<b>EC1</b>	Constant Voltage LED driver, 120v or 277v required

## Drivers: MOD Options

- Specify **MOD** in the part number for any of the below options
- Consult factory for MOD specification details, pricing, and lead-time information

<b>MOD</b>	Power Over Ethernet
------------	---------------------

## How to Specify Circuiting, Battery and Emergency

1

- Select fixture circuiting from options below
- Some EX2I configurations will not accommodate all circuiting options, consult with factory

### Circuiting

<b>1</b>	Single Circuit
<b>M</b>	Multi Circuit
<b>E</b>	Emergency Circuit only
<b>N</b>	Night Light Circuit only

2

+

3

- Battery and emergency section options are available in addition to fixture circuit
- Select battery and emergency section options below; factory shop drawing required
- Some EX2I configurations will not accommodate all circuiting options, consult with factory

## Battery and/or Emergency If Required

<b>0</b>	No battery or specific emergency section required
----------	---



## Battery

- Select battery section type if required, indicate total QTY. *Example 2PL*
- 90 minute battery runtime; test button location dependant on configuration, consult factory
- No battery option available for 2' lengths

- Entire direct fixture housing is on battery for lengths up to 5'
- Half of direct fixture is on battery for 6' or 8' housing lengths
- For more battery options available, see Pinnacle Resource Guide

<b>0</b>	No Battery
<b>_FSB</b>	Factory Select Battery (10w option)
<b>_FSBST</b>	Factory Select Battery (10w, Self Testing)
<b>_IC</b>	lota 10w Integral
<b>_ILL</b>	lota 10w Integral Lithium, Self Testing
<b>_IRH</b>	lota 20w Remote
<b>_P</b>	Bodine 10w Integral
<b>_PRH</b>	Bodine 20w Remote
<b>_PLL</b>	Bodine 10w Integral Lithium, Self Testing

### For Approximate Battery Lumen Output

- Multiply battery wattage X fixture LPW shown on Lumen Table
- 92.3 (LPW) x 10 (watts) = 923 battery lumen output

## Emergency

- Select emergency section type if required, indicate total QTY. *Example 1E*
- Combine battery and emergency section ordering codes if both options are selected

<b>_FSG</b>	Factory Select Automatic Load Control Relay (ALCR), UNV
<b>_GI</b>	Emergency Transfer Switch (ETS) DR Emergency Control Device, UNV
<b>_GB</b>	Bodine GTD, Generator Transfer Device, 120v or 277v
<b>_E</b>	Emergency circuit section
<b>_N</b>	Night Light circuit section
<b>_L</b>	Life Safety circuit section NO THROUGH WIRE

### Battery OR Emergency Ordering Examples

- Single circuit, 10w Integral Battery Ordering Code: 1-1PL
- Emergency only, 10w Integral Battery Ordering Code: E-1PL
- Single circuit, GTD required Ordering Code: 1-1G

### Combination Section Ordering Examples

- Single circuit, (1) 10w battery, (1) emergency section Ordering Code: 1-1PL1E
- Multi circuit, (2) 10w battery, (2) emergency sections Ordering Code: M-2PL2E
- Single circuit, (1) night light section Ordering Code: 1-1N

## Finish

- Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes
- Selecting a fixture finish other than white may impact lumen output; consult factory for more information

<b>W</b>	White ( <i>white cord/white canopy</i> )
<b>S</b>	Metallic Silver ( <i>grey cord/silver canopy</i> )
<b>BL</b>	Textured Black ( <i>black cord/black canopy</i> )
<b>BR</b>	Bronze ( <i>white cord/bronze canopy</i> )
<b>GR</b>	Graphite ( <i>white cord/graphite canopy</i> )
<b>CC</b>	Custom Color ( <i>white cord/color match canopy</i> )

## Fixture Options

- Additional options to enhance the fixture and finish of the product

<b>QS</b>	Quick Ship
<b>DSP</b>	Customer Supplied Battery/Driver/Sensor

## Fixture Options: MOD Options

- Specify **MOD** in the part number for any of the below options
- Consult factory for MOD specification details, pricing, and lead-time information

<b>MOD</b>	Remote Driver
	End Power Feed

## Quick Ship

Shielding	CRI, CCT & Output	Mounting	Voltage	Driver	Circuiting	Battery	Finish
<b>10-Day</b>							
<b>HE</b> <b>BW</b> <b>WHE</b>	80 CRI, all color temperatures, all lumen packages <i>See pg 2</i>	<b>(M)AC48G_</b> <b>(M)AC48JB</b> <b>(M)AC48ST</b> <b>WA</b>	(M)AC to Grid (M)AC to J_BOX (M)AC to Structure Wall Mount	<b>U</b> Universal (120-277) <b>1</b> 120V <b>2</b> 277V	<b>FSD</b> Factory Select Driver (1%, 0-10v) <b>PL2</b> Advance Xitanium 0-10v, 1% <b>OL2</b> Osram 0-10v, 1%	<b>1</b> Single Circuit <b>E</b> Emergency <b>N</b> Night Light	<b>0</b> None <b>_IC</b> lota 10w Integral <b>W</b> White <b>S</b> Silver <b>BL</b> Black

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Black QuickShip only available in 4', 6', and 8' individual lengths. Consult factory for larger projects.

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568

EX4I\_LED\_SPEC\_APRIL2023



## Controls

- Pinnacle Lighting offers easy to specify network control solutions that connect to an intelligent centralized system to maximize lighting energy efficiencies or integral sensors for individual fixture control
- Pinnacle Lighting fixtures ship technology ready; comissioning by others
- Controls can only be used with Single Circuit (1) or Emergency Circuit (E)
- Contact factory for any non-standard configurations for layout, placement, or EM options
- One drop per sensor typical, consult factory for more information

	Solution	Components	Network/Sensor	Connection	Required Drivers	Limitations
<b>DLMFC</b>	Legrand Wattstopper DLM	LMFC-011	Digital Lighting Management (DLM)	Wired, two RJ45 ports	OL2, OL4	Not available with Battery
<b>DLMFS</b>	Legrand Wattstopper LLLC	LMFS-601-W / LMFI-111	Wireless DLM Fixture Sensor	Wireless	OD1, PR1, 0-10v	0-10v requires interface
<b>EASYS</b>	Philips EasySense	SNS-210	Daylight/PIR Occupancy	Wireless to switches	PR1	Not available with 347 volt
<b>SNSLM</b>	Encelium Sensilum	EN-CLM-PIR-DD-ZB	Encelium, Daylight/PIR Occupancy	Wireless	OD1, OL1, OL2	Not available with 347 volt
<b>WLVX</b>	Eaton Wavelinx	SWPD1, NSP3IVMVC1	WaveLinX WCL, Daylight	Wireless	Any 0-10v	Not available with 347 volt
<b>VDO</b>	Lutron Vive Sensor	DFCSJ-OEM-OCC	Vive, Daylight/PIR Occupancy	Wireless	OD1, PR1	Not available with 347 volt
<b>VRF</b>	Lutron Vive Connected	DFCSJ-OEM-RF	Vive	Wireless	OD1, PR1	Not available with 347 volt
<b>ENLI</b>	Enlighted	SU-5E-IOT, CU-4E	Enlighted, Daylight/PIR Occupancy	Wireless	Any 0-10v	Not available with 347 volt
<b>ENLC</b>	Enlighted	SU-5E-CL, CU-4E	Enlighted, Daylight/PIR Occupancy	Wireless	Any 0-10v	Not available with 347 volt

## Controls: Tunable White

- Pinnacle Lighting offers easy to specify tunable white solutions for integrated building control solutions or standalone controls
- Pinnacle Lighting fixtures ship technology ready; comissioning by others
- Controls can only be used with Single Circuit (1) or Emergency Circuit (E)
- Contact factory for any non-standard configurations for layout or placement

	Solution	Components	Network/Sensor	Connection	Required Drivers	Required LED	Required Controls	Limitations
<b>B3LM</b>	Legrand Wattstopper Blanco 3	BLM3-DLM	Digital Lighting Management (DLM)	Wired, two RJ45 ports	EC2	TW3	B3LM	Not available with 347 volt

## Controls: MOD Options


- Specify **MOD** in the part number for any of the below options
- Control** Options may require specific driver. Refer to the chart below
- Consult factory for MOD specification details, pricing, and lead-time information

		Required Driver
<b>MOD</b>	Encelium Sensilum	OD1, OL5
	Enlighted (Wireless) - ENLI	Any 0-10v
	Enlighted (Wireless) - ENLC	Any 0-10v
	Acuity nLight Air Wireless Connected	EE6, ES6

## Photometrics

### Open

Test # Scaled from ITL94462  
Catalog # EX4I-HE-840VHO-4  
Lumens 400 lm  
Watts 27 W  
Efficacy 148 LPW



### Candela Distribution

Vert Angle	Horizontal Angle				
	0	22.5	45	67.5	90
90	4	57	61	44	39
95	47	121	153	120	105
100	106	184	245	213	194
105	175	252	341	338	324
110	254	335	428	458	460
115	352	428	522	561	575
120	458	533	620	663	675
125	579	642	727	763	778
130	695	757	835	869	880
135	807	861	946	976	986
140	904	955	1048	1084	1093
145	996	1029	1124	1171	1187
150	1072	1095	1171	1220	1236
155	1138	1149	1207	1243	1257
160	1189	1194	1234	1258	1266
165	1229	1230	1254	1268	1272
170	1255	1257	1267	1275	1276
175	1270	1271	1273	1275	1277
180	1275	1275	1275	1275	1275

For all available IES files, please visit our website at [pinnacle-ltg.com](http://pinnacle-ltg.com). Photometry testing in accordance to IESNA-LM-79-08 at an NVLAP accredited testing laboratory. Testing conducted at 25°C ambient conditions.

Specifications and dimensions subject to change without notice. Specification sheets that appear on [pinnacle-ltg.com](http://pinnacle-ltg.com) are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | [pinnacle-ltg.com](http://pinnacle-ltg.com) | O: 303-322-5570 F: 303-322-5568

EX4I\_LED\_SPEC\_APRIL2023





## Applications & Certificates

**Construction:** 6063-T6 Extruded aluminum housing. Highly reflective steel white painted reflector.

**Shielding:** Diffuse snap-in acrylic lens, removable for maintenance.

**Mounting:** Aircraft cable and wall mount available. Select from 2 aircraft cable options. Select the straight aircraft cable that mounts on 4'-0" (1219.2mm) and 8'-0" (2438.4mm) centers or the moveable adjustable Y-cable mount. The Y-Cable design allows for adjustable mounting locations. Aircraft Cable supplied with 5" (127mm) power and 2" (50.8mm) non-power canopies. Refer to installation instructions for appropriate ceiling detail. Canopies are painted white unless otherwise specified. Maximum fixture weight is 20 lbs. for a standard 4' fixture.

**White LED:** 25°C test environment. Lumen output/wattage has a margin of +/- 5%; 2' or 3' lengths may have a greater wattage deviation. Luminaire configurations tested in accordance with IES LM-79. Diodes tested in accordance with IES LM-80. Lifetime calculated using IES TM-21. Minimum lifetime greater than 60,000 hours. Lifetime Projection L70 = 146,500 hours and L90 = 45,000 hours. MacAdam 3-Step Ellipses. Not all products are Lighting Facts listed. For all available IES files, please visit our website at pinnacle-ltg.com. Three lumen packages available. Standard, High (HO) and Very High (VHO). Custom outputs are available. Specify custom lumens or watts between standard offering listed on CRI, CCT & Output page. 80 CRI is available for 3000K, 3500K, and 4000K. 90 CRI is available for 2700K, 3000K, 3500K, and 4000K. 90 CRI = R9≥50.

**BIOS LED:** Spectrum focused lighting for circadian stimulus. EML or M/P ratio: .8 for 3500K, .9 for 4000K COI >3.0. Not all lumen packages available. Three lumen packages available. Standard, High (HO) and Very High (VHO). Custom outputs are available. Specify custom lumens or watts between standard offering listed on CRI, CCT & Output page.

**Tunable White LED:** Blanco 3; 3 Channel tunable white for precise black body curve CCT. Self-commissioning with Wattstopper DLM integrated controls. Custom lumen output and color temperature configurations require use of controls.

**Voltage:** Universal (U), 120 volt (1), 277 volt (2) and 347 volt (3) options available. Must specify OL4 in Driver section when 347 volt (3) is selected. Some EDGE configurations will not accommodate all voltage options; consult with factory.

**Driver:** Standard Driver Option is Advance Xitanium 0-10V, 1% = PL2. Electronic driver, Power factor is >0.9 with a THD <20%. Driver Lifetime: 50,000 hours at 25°C ambient operating conditions. Ambient operating range: -20°F/-30°C to 122°F/50°C. For more driver options, see Pinnacle Resource Guide. Some EDGE configurations will not accommodate all driver options.

**Circuiting:** Select from single circuit (1), Multi circuit - For multiple circuiting and zone control, requires factory shop drawing (M), Emergency circuit (E), Life Safety (L) or Night

Light circuit (N). For emergency circuiting situations that require no through wire or circuit separation, Life Safety Circuit should be selected. This will provide a separate power feed and only the Life Safety Circuit in that section. Some EDGE configurations will not accommodate all circuiting options; consult with factory.

**Battery & Emergency:** Select battery or emergency options if required. If battery or emergency option is not required, enter 0. Battery duration is 90 minutes as standard. Test button location dependant on configuration, consult factory. For more Battery options, see Pinnacle Resource Guide.

**Finish:** Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes or for additional custom color and finish options.

**Controls:** DLM utilizes wired network connections for digital control through switching and dimming. nLight Air rES7 sensor provides wireless control, daylight harvesting and occupancy detection with PIR using eldoLED LED drivers. nLight Air rES7 sensor provides wireless control, daylight harvesting and occupancy detection with PDT using eldoLED LED drivers. nLight Air rLO module provides wireless control using eldoLED LED drivers. EasySense sensor provides daylight harvesting and PIR occupancy detection using the SR LED driver; the Philips app provides advanced configurations. ENCELUM SensiLUM sensor provides wireless control, daylight harvesting and PIR occupancy; driver data is available when using the DEXAL driver. ENCELUM SensiLUM sensor provides wireless control, daylight harvesting and PIR occupancy; driver data is available when using the DEXAL driver. Wavelinx Connected Lighting sensor provides wireless control and daylight harvesting using 0-10V LED drivers. Lutron Vive sensor provides wireless control, daylight harvesting and PIR occupancy detection using DEXAL or SR LED drivers. Lutron Vive module provides wireless control using DEXAL or SR LED drivers. Enlighted Smart Sensor provides multi-functionality including daylight harvesting and PIR occupancy; for IOT platform using 0-10v LED drivers. Enlighted Smart Sensor provides multi-functionality including daylight harvesting and PIR occupancy; for Connected platform using 0-10v LED drivers.

**Labels:** UL and cUL 2108 or 1598 listed depending on product configuration. Standard, HO and VHO lumen packages are IC Rated, approved for dry/damp location unless otherwise noted.

**Fixture Weight:** Maximum fixture weight is 20lbs per 4' fixture.

**Buy American Act Compliant**

**Warranty:** EDGE LED offered with a 5-year limited warranty. Covers LED, driver and fixture.