

**QUARTZ HALOGEN / Ceiling Mount**

For Indoor and Outdoor Lighting Applications

**CONSTRUCTION** Extruded aluminum housing, die cast end caps. Outdoor rated luminaires include mechanically attached and gasketed aluminum door frame.

**REFLECTOR** Highly reflective specular anodized aluminum.



**LENS** Micro-prismatic tempered glass and die-formed aluminum trim (spring secured) for toolless lamp access. For outdoor glass, is secured to aluminum door frame and mechanically attaches to housing.

**ELECTRICAL** Available in 120 volt only.

**MOUNTING** Fully rotatable head mounts to structure in numerous configurations. See back for dimensions and details.

**FINISH** Powder coat white painted finish, consult factory for custom colors and finishes.

**LABELS** cUL Listed, approved for dry/damp and wet location unless otherwise noted.

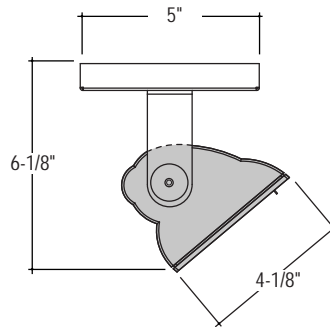


12"

- (1) 100W T4,DC
- (1) 150W T4,DC
- (1) 200W T3,RSC
- (1) 250W T4,DC






**LUMINAIRE SPECIFICATION**


Sample Catalog #: PR-Q250T4-Y-120-W-V

P__ -		Q_____ -		_____ -		_____ -		_____ -			
HOUSING		LAMP/ FIXTURE LENGTH		MOUNTING		VOLTAGE		FINISH			
<b>PS-</b> Peak indoor luminaire, <b>Smooth</b> Housing, cUL dry/damp label. <b>PR-</b> Peak indoor luminaire, <b>Ribbed</b> Housing, cUL dry/damp label. <b>PSW-</b> Peak outdoor luminaire, <b>Smooth</b> Housing, cUL wet label. <b>PRW-</b> Peak outdoor luminaire, <b>Ribbed</b> Housing, cUL wet label. <b>PSN-</b> Peak natatorium luminaire, <b>Smooth</b> Housing, cUL wet label. <b>PRN-</b> Peak natatorium luminaire, <b>Ribbed</b> Housing, cUL wet label.		<b>LAMP</b> <b>Q100T4-</b> (1)100W T4,DC 12" <b>Q150T4-</b> (1)150W T4,DC 12" <b>Q200T3-</b> (1)200W T3,RSC 12" <b>Q250T4-</b> (1)250W T4,DC 12"		<b>Y-</b> Yoke <b>P__"-</b> Pendant (specify O.A.L., 12", 18" or 24") (Not available in wet location) <b>PS__-</b> Pendant Swivel (specify O.A.L., 12", 18" or 24") (Not available in wet location) <b>A1__"-</b> Arm Mount/Single Head (specify O.A.L., 12", 18" or 24") <b>A2__"-</b> Arm Mount/Dual Head (specify O.A.L., 12", 18" or 24")		<b>120-</b> 120 Volt		<b>W-</b> White <b>S-</b> Metallic Silver <b>BR-</b> Bronze <b>CC-</b> Custom Color		<b>B-</b> Baffle* <b>V-</b> Visor* <small>*Color will match housing unless otherwise specified</small>	
Optional Visor (V) for glare cut-off adds 4" to O.A.L.											

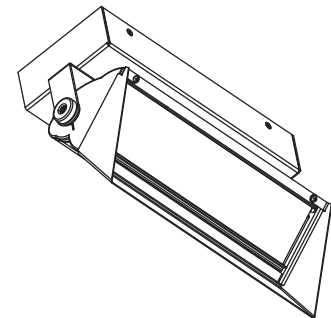

**MOUNTING**

Y-Yoke	P__"-Pendant**	PS__"-Pendant Swivel**	A1__"-Arm Single Head	A2__"-Arm Dual Head
				
	**Not Available in wet location	**Not Available in wet location		

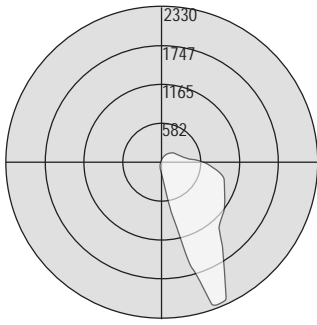


Test #15014  
 Catalog # P-Q250T4-Y-1-W-V  
 Total Luminaire Efficiency = 66.6%

Zone	Lumens	%Lamp	%Fixt
0-30	480.35	9.6	14.4
0-40	982.4	19.6	29.5
0-60	1941.04	38.8	58.3
0-90	2956.13	59.1	88.9
90-120	312.71	6.3	9.4
90-130	345.37	6.9	10.4
90-150	368.88	7.4	11.1
90-180	370.7	7.4	11.1
0-180	3326.83	66.5	100


0	45	90	135	180	
0	96	96	96	96	
5	201	164	94	75	65
15	1363	616	113	42	6
25	2336	1954	130	1	0
35	1576	2336	158	0	0
45	1200	1775	147	0	0
55	1202	1244	111	0	0
65	1097	1011	81	0	0
75	978	821	51	0	0
85	740	563	31	0	0
90	548	415	23	0	0
95	378	309	15	0	0
105	260	230	5	0	0
115	230	144	1	0	0
125	134	74	0	0	0
135	79	44	0	0	0
145	45	22	0	0	0
155	18	4	0	0	0
165	0	0	0	0	0

MOUNTING

Y-"Yoke"

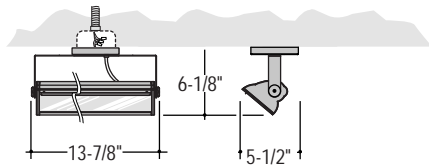

A1/A2-"Arm Mount"

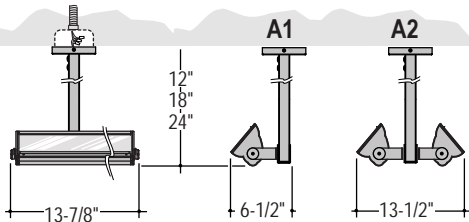

P-"Pendant Mount"  
 PS-"Pendant Swivel", 45 degree swivel.  
 Not Available in wet location

