



EDGE EV1

PATTERN WORKSHEET FOR "L" CONNECTORS


Standard⁴ Yes No

Perimeter Mount³ Yes No

SHIELDING	MOUNTING
A - Satine Lens HE - High Efficiency Lens	G1 - 1" (15/16) T Bar G9 - 9/16" T Bar GB - 9/16" Beveled T Bar GS - Screw Slot FL - Flanged SF - Spackle Flange NF - Non Flange


Dimensions^{1,2}

(shown as plan view)



Square


A =

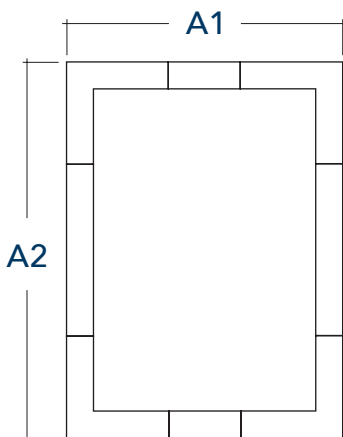

Rectangle

A1 =

A2 =

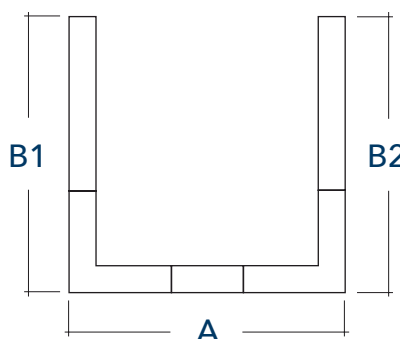


U-Shape

A =

B1 =

B2 =



L-Shape

B1 =

B2 =

Common Dimensions ³ (increments of 1' + 11") ¹
A / A1 / A2
3'11" (47")
<i>minimum</i>
4'11" (59")
5'11" (71")
6'11" (83")
7'11" (95")
8'11" (107")
9'11" (119")
10'11" (131")
11'11" (143")
12'11" (155")
13'11" (167")
And so on...

Common Dimensions ³ (increments of 1' + 11") ¹
B1 / B2
2'11" (35")
<i>minimum</i>
3'11" (47")
4'11" (59")
5'11" (71")
6'11" (83")
7'11" (95")
8'11" (107")
9'11" (119")
10'11" (131")
11'11" (143")
12'11" (155")
And so on...

¹Each corner is 1' (12"). The minimum dimensions are for the entire side, specifying row length to the 1/8" is a standard option, including the corners. Please see the EV1 spec sheet for more information about the corners.

²If using perimeter mount, please provide a RCP or drawing that clearly shows the wall side compared to the pattern.

³Any pattern that is not standard, including dimensions less than the minimum and corners other than 90 degrees, will require an approval and quote before ordering. Please talk to your salesperson about the best way to communicate your custom needs to us.