



# EDGE EV6

## PATTERN WORKSHEET FOR "L" CONNECTORS


SHIELDING	MOUNTING
<b>A</b> - Satine Lens	<b>G1</b> - 1" (15/16) T Bar <b>G9</b> - 9/16" T Bar <b>GB</b> - 9/16" Bevel T Bar <b>GS</b> - Screw Slot <b>FL</b> - Flanged <b>SF</b> - Spackle Flange <b>NF</b> - Non Flange

Standard<sup>2</sup>                      Yes                      No

Perimeter Mount<sup>3</sup>        Yes                      No

### Dimensions<sup>1,2</sup>

(shown as plan view)

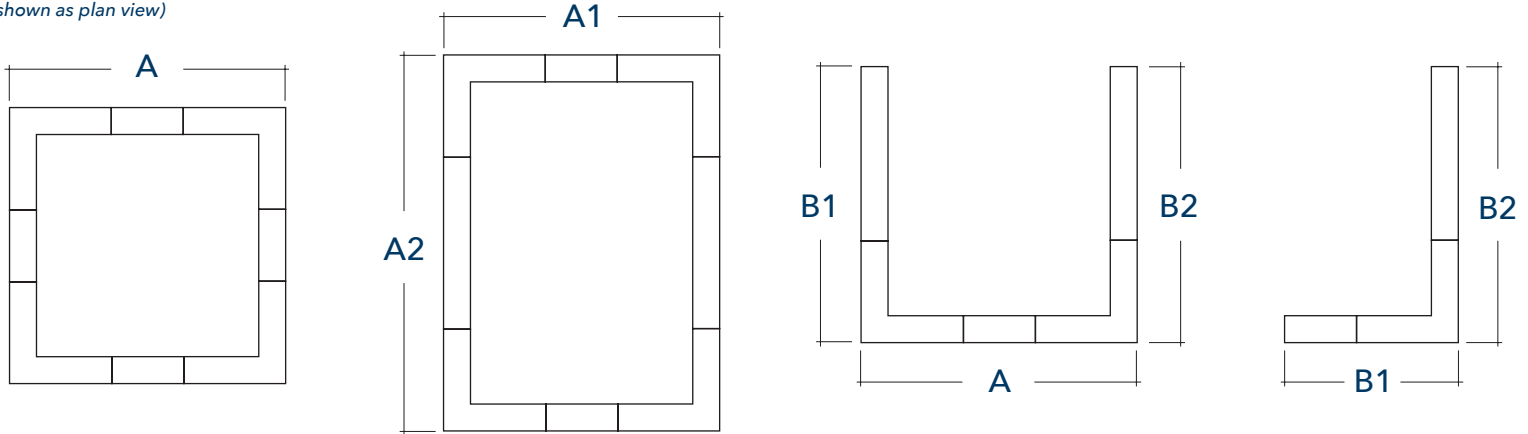

#### Square

A =

#### Rectangle

A1 =

A2 =

#### U-Shape

A =

B1 =

B2 =

#### L-Shape

B1 =

B2 =

Common Dimensions <sup>3</sup> (increments of 1' + 3")
A / A1 / A2
4'3" (51")
<i>minimum</i>
5'3" (63")
6'3" (75")
7'3" (87")
8'3" (99")
9'3" (111")
10'3" (123")
11'3" (135")
12'3" (147")
13'3" (159")
14'3" (171")
And so on...

Common Dimensions <sup>3</sup> (increments of 1' + 1")
B1 / B2
3'1" (37")
<i>minimum</i>
4'1" (49")
5'1" (61")
6'1" (73")
7'1" (85")
8'1" (97")
9'1" (109")
10'1" (121")
11'1" (133")
12'1" (145")
13'1" (157")
And so on...

<sup>1</sup>Each corner is 1'2" (14"), specifying row length to the 1/8" is a standard option, please see the EV6 spec sheet for more information about the corners. The standard dimensions offered in the table are for the entire side, including the corners.

<sup>2</sup>Any pattern that is not standard, including non-standard dimensions and corners other than 90 degrees, will require an approval and quote before ordering. Please talk to your salesperson about the best way to communicate your custom needs to us.

<sup>3</sup>If using perimeter mount, please provide a RCP or drawing that clearly shows the wall side compared to the pattern.