



EDGE EX3D | EX3DI


PATTERN WORKSHEET FOR "L" CONNECTORS

Standard ²	Yes	No
Wall Mount ³	Yes	No

HOUSING	DIRECT SHIELDING	INDIRECT SHIELDING
EX3D - Direct EDGE EX3 EX3DI - Direct/Indirect EDGE EX3	A - Satine Lens HE - High Efficiency Lens	HE - High Efficiency Lens BW - Batwing
		<i>Connectors are non-illuminated on indirect side</i>


Dimensions^{1,2}

(shown as plan view)



Square


A =

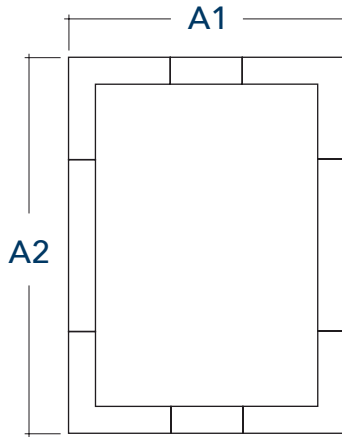

Rectangle

A1 =

A2 =

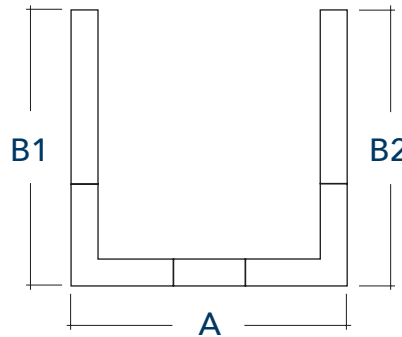


U-Shape

A =

B1 =

B2 =



L-Shape

B1 =

B2 =

Common Dimensions ¹ (increments of 1')
A / A1 / A2
4' (48") <i>minimum</i>
5' (60")
6' (72")
7' (84")
8' (96")
9' (108")
10' (120")
11' (132")
12' (144")
13' (156")
14' (168")
And so on...

Common Dimensions ¹ (increments of 1')
B1 / B2
3' (36") <i>minimum</i>
4' (48")
5' (60")
6' (72")
7' (84")
8' (96")
9' (108")
10' (120")
11' (132")
12' (144")
13' (156")
And so on...

¹Each corner is 1' (12"), direct only, when ordering direct/indirect fixtures only direct portion of corner is illuminated, specifying row length to the 1/8" is a standard option, please see the EX3D or EX3DI spec sheet for more information about the corners. The common dimensions offered in the table are for the entire side, including the corners.

²Any pattern that is not standard, including non-standard dimensions and corners other than 90 degrees, will require an approval and quote before ordering. Please talk to your salesperson about the best way to communicate your custom needs to us.

³If using wall mount, please provide a RCP or drawing that clearly shows the wall side compared to the pattern.