



10 DAY
QUICK SHIP →






Sample Part # EV3D-HE-830-24'-G1-U-ol1-T-0-W-QS

QS must be listed at the end of the part number¹

EDGE

EV2D / 3D / 4D

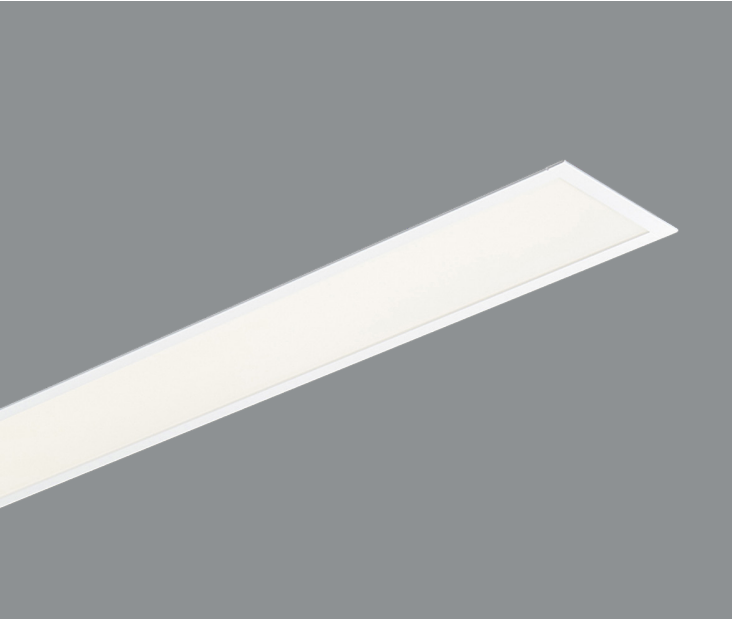

Shielding		CRI, CCT & Output²		Length or Pattern³		Mounting		Voltage		Driver		Circuiting⁴		Battery⁴		Finish		Options	
A	Satine	8 _____	80 CRI only. All color temperatures, all lumen packages listed on spec sheet	—	Individual Fixture	G1(G)	1" T-Bar	U	Universal (120-277)	OL1	Osram 10% / 0-10v, std	1	Single Circuit	0	None	W	White	CP	Chicago Plenum
HE	High			--	Cont. Row (to an 1/8")	G9(G)	9/16" T-Bar	1	120V	OL2	Osram 1% / 0-10v	E	Emergency	IL	Iota 10W Integral			GLR	Internal Fast Blow Fuse
BW	Batwing			L_X_	L-shape	GS(G)	Screw Slot	2	277V	LH1	Lutron Hi-Lume, 1% EcoSystem	N	Night Light						
WHE	Asymmetric	CL	Custom Lumens	R_X_	Rectangle	FL(F)	1/2" Flange			PL2	Philips Xitanium 1% 0-10v								
		CW	Custom Watts	S_	Square	NF(N)	Flangeless			ND	Non-Dimming								
				U_X_	U-shape	SF(S)	Spackle Flange												
				WC	Wall to ceiling														

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

EVL / EVLS



CRI, CCT & Output²		Length		Mounting		Voltage		Driver		Circuiting⁴		Battery⁴		Finish		Options	
8 _____	80 CRI only. All color temperatures, all lumen packages listed on spec sheet	—	Individual Fixture	G1(G)	1" T-Bar	U	Universal (120-277)	OL1	Osram 10% / 0-10v, std	1	Single Circuit	0	None	W	White	CP	Chicago Plenum
		--	Cont. Row(to the foot)	G9(G)	9/16" T-Bar	1	120V	OL2	Osram 1% / 0-10v	E	Emergency	IL	Iota 10W Integral			GLR	Internal Fast Blow Fuse
CL	Custom Lumens			GS(G)	Screw Slot	2	277V	LH1	Lutron Hi-Lume, 1% EcoSystem	N	Night Light					EF	End Filler⁵
CW	Custom Watts			FL(F)	1/2" Flange			PL2	Philips Xitanium 1% 0-10v								
				NF(N)	Flangeless			ND	Non-Dimming								
				SF(S)	Spackle Flange												

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

EV3WW



CRI, CCT & Output²		Length		Mounting		Voltage		Driver		Circuiting⁴		Battery⁴		Finish		Options	
8 _____	80 CRI only. All color temperatures, all lumen packages listed on spec sheet	—	Individual Fixture	G1(G)	1" T-Bar	U	Universal (120-277)	OL1	Osram 10% / 0-10v, std	1	Single Circuit	0	None	W	White	CP	Chicago Plenum
		--	Cont. Row(to the foot)	G9(G)	9/16" T-Bar	1	120V	OL2	Osram 1% / 0-10v	E	Emergency	IL	Iota 10W Integral			GLR	Internal Fast Blow Fuse
CL	Custom Lumens			GS(G)	Screw Slot	2	277V	LH1	Lutron Hi-Lume, 1% EcoSystem	N	Night Light					EF	End Filler⁵
CW	Custom Watts			FL(F)	1/2" Flange			PL2	Philips Xitanium 1% 0-10v								
				NF(N)	Flangeless			ND	Non-Dimming								
				SF(S)	Spackle Flange												


All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

EDGE EX

Sample Part # EX3D-HE-N-830-24'-AC48G1-U-ol1-1-0-W-QS

QS must be listed at the end of the part number¹


EX2D / 3D / 4D
EX2DI / 3DI / 4DI
EX2I / 3I / 4I

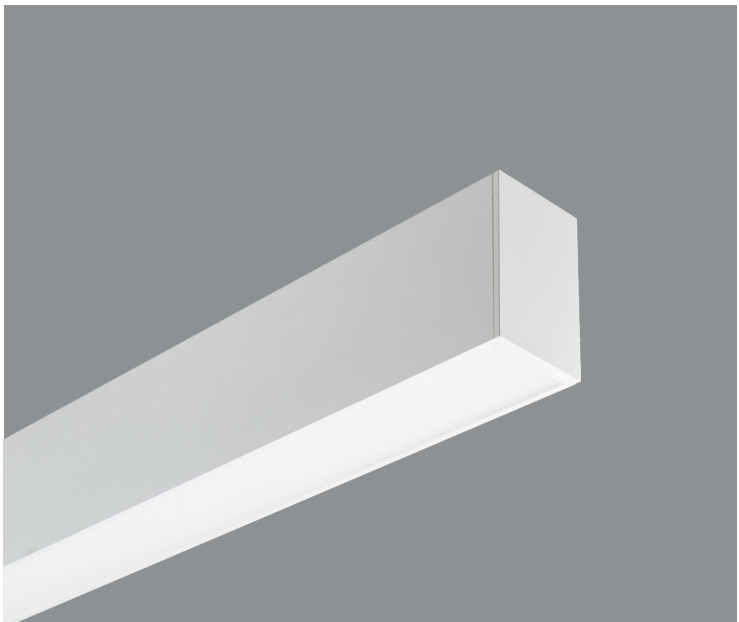

Direct Shielding		CRI, CCT & Output²		Length or Pattern³		Mounting		Voltage		Driver		Circuiting⁴		Battery⁴		Finish		Options	
V	Satine	8----	80 CRI only. All color temperatures, all lumen packages listed on spec sheet	_	Individual Fixture	(M)C48G_	Grid	U	Universal (120-277)	OL1	Osram 10% / 0-10v, std	1	Single Circuit	0	None	W	White	GLR	Internal Fast Blow Fuse
HE	High Efficiency			--	Cont. Row (to the foot)	(M)AC48JB	Junction Box	1	120V	OL2	Osram 1% / 0-10v	E	Emergency	IL	Iota 10W Integral	S	Silver		
BW	Batwing			L_X_	L-shape	(M)AC48ST	Structure	2	277V	LH1	Lutron Hi-Lume, 1% EcoSystem	N	Night Light			BL	Textured Black		
WHE	Asymmetric			R_X_	Rectangle	WA	Wall			PL2	Philips Xitanium 1% 0-10v								
N	None Indirect fixture only	CL	Custom Lumens	S_	Square	S	Surface			ND	Non-Dimming								
CW	Custom Watts			U_X_	U-shape														
Indirect Shielding																			
HE	High Efficiency																		
BW	Batwing																		
WHE	Asymmetric																		
N	None Direct fixture only																		

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Black QuickShip only available in 4', 6', and 8' individual lengths. Consult factory for larger projects.

EX3WW

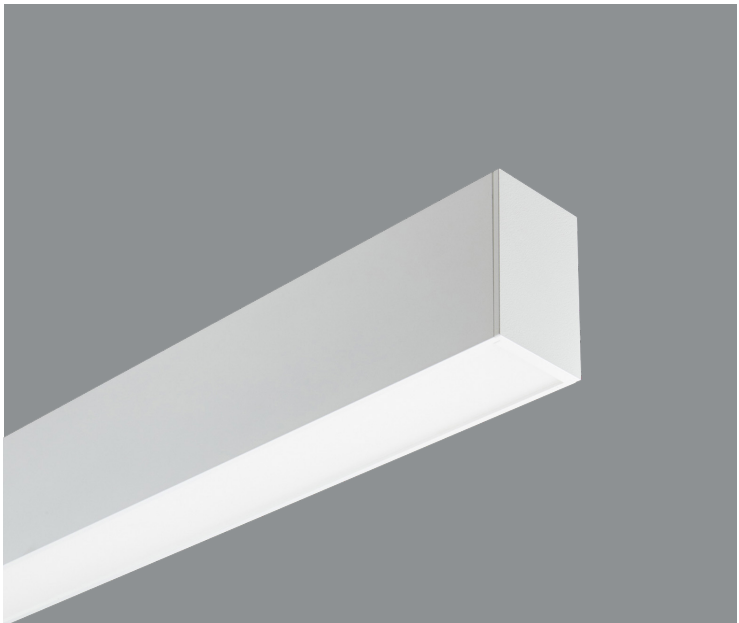

Direct Shielding		CRI, CCT & Output²		Length or Pattern³		Mounting		Voltage		Driver		Circuiting⁴		Battery⁴		Finish		Options	
WW	Wall Wash	8----	80 CRI only. All color temperatures, all lumen packages listed on spec sheet	_	Individual Fixture	(M)AC48G_	Grid	U	Universal (120-277)	OL1	Osram 10% / 0-10v, std	1	Single Circuit	0	None	W	White	GLR	Internal Fast Blow Fuse
				--	Cont. Row (to the foot)	(M)AC48JB	Junction Box	1	120V	OL2	Osram 1% / 0-10v	E	Emergency	IL	Iota 10W Integral	S	Silver		
						(M)AC48ST	Structure	2	277V	LH1	Lutron Hi-Lume, 1% EcoSystem	N	Night Light						
						S	Surface			PL2	Philips Xitanium 1% 0-10v								
		CL	Custom Lumens							ND	Non-Dimming								
		CW	Custom Watts																

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Black QuickShip only available in 4', 6', and 8' individual lengths. Consult factory for larger projects.


TESA

Sample Part # T4A-835VHO-16'-AC48G1-U-OL1-1-0-W-QS

QS must be listed at the end of the part number*



T4A

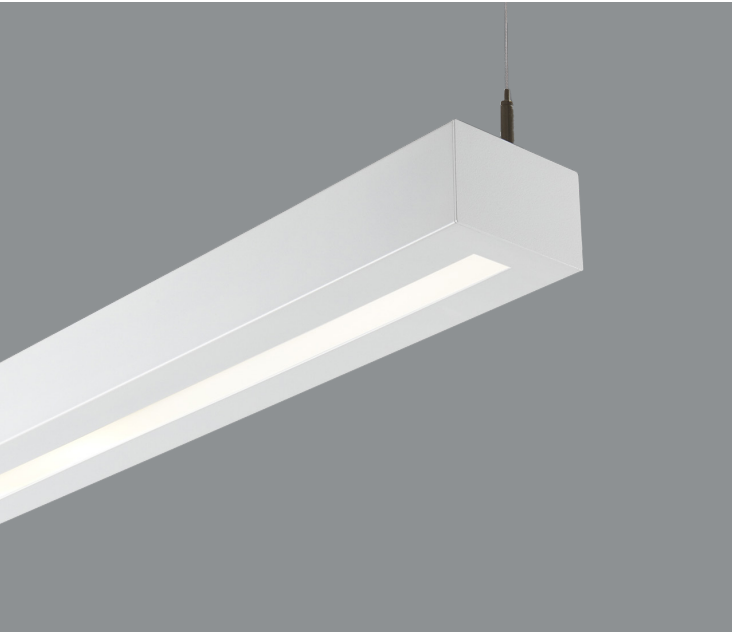

Shielding

A Satine

CRI, CCT & Output ²

8 80 CRI only. All color temperatures, all lumen packages listed on spec sheet

CL Custom Lumens
CW Custom Watts

Length

— Individual Fixture (4', 8')
-- Cont. Row (in 4' increments)

Mounting

AC48G Grid
AC48JB Junction Box
AC48ST Structure

Voltage

U Universal (120-277)
1 120V
2 277V

Driver

OL1 Osram 10% 0-10v, std
OL2 Osram 1% 0-10v
LH1 Lutron Hi-Lume, 1% EcoSystem
PL2 Philips Xitanium 1% 0-10v
ND Non-Dimming

Circuiting⁴

1 Single Circuit
E Emergency
N Night Light

Battery⁴

0 None
IR Iota 10W (remote)

Finish

W White

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

COVE


Sample Part # C-830HO-26'-CV-U-OL1-1-0-N-QS

QS must be listed at the end of the part number*

CRI, CCT & Output ²		Length		Mounting		Voltage		Driver		Circuiting ⁴		Battery ⁴		Finish	
8	80 CRI only. All color temperatures, all lumen packages listed on spec sheet	—	Individual Fixture (2', 3', 4', 6', 8')	CV	COVE Mounting	U	Universal (120-277)	OL1	Osram 10% 0-10v, std	1	Single Circuit	0	None	N	Natural
			1			120V	OL2	Osram 1% 0-10v	E	Emergency	IL	Iota 10W Integral (low profile)			
CL		Custom Lumens	—			Cont. Row (in 1' increments)	2	277V	LH1	Lutron Hi-Lume, 1% EcoSystem	N	Night Light			
CW	Custom Watts							PL2	Philips Xitanium 1% 0-10v						

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

C

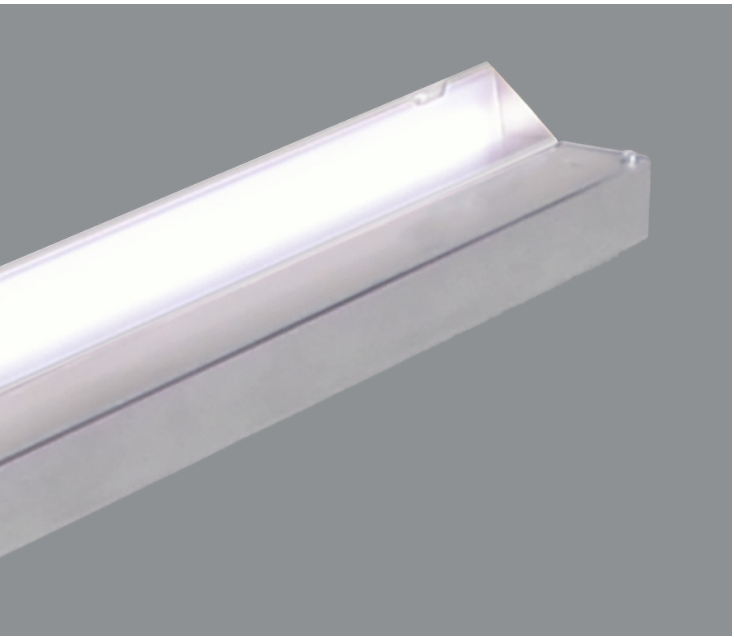

LINERO

Sample Part # L8DI-A-70-835-16'-AC48JB-U-OL1-1-0-W-QS

QS must be listed at the end of the part number*

L6DI-A-40 / L6DI-A-70
L6DI-A-100



Shielding	
A	Satine

CRI, CCT & Output ²	
8	80 CRI only. All color temperatures, all lumen packages listed on spec sheet
CL	Custom Lumens
CW	CustomWatts

Length	
-	Individual Fixture (4', 6', 8')
--	Cont. Row (in 2' increments starting at 4')

Mounting	
AC48G	Grid
AC48JB	Junction Box
AC48ST	Structure

Voltage	
U	Universal (120-277)
1	120V
2	277V

Driver	
OL1	Osram 10% 0-10v, std
OL2	Osram 1% 0-10v
LH1	Lutron Hi-Lume, 1% EcoSystem
PL2	Philips Xitanium 1% 0-10v

Circuiting ⁴	
1	Single Circuit
E	Emergency
N	Night Light

Battery ⁴	
PL	Philips Bodine 10W – low profile

Finish	
W	White

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

L8DI-A-40 / L8DI-A-70
L8DI-A-100



Shielding	
A	Satine

CRI, CCT & Output ²	
8	80 CRI only. All color temperatures, all lumen packages listed on spec sheet
CL	Custom Lumens
CW	CustomWatts

Length	
-	Individual Fixture (4', 6', 8')
--	Cont. Row (in 2' increments starting at 4')

Mounting	
AC48G	Grid
AC48JB	Junction Box
AC48ST	Structure

Voltage	
U	Universal (120-277)
1	120V
2	277V

Driver	
OL1	Osram 10% 0-10v, std
OL2	Osram 1% 0-10v
LH1	Lutron Hi-Lume, 1% EcoSystem
PL2	Philips Xitanium 1% 0-10v

Circuiting ⁴	
1	Single Circuit
E	Emergency
N	Night Light

Battery ⁴	
PL	Philips Bodine 10W – low profile

Finish	
W	White

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

ADEO/LUCEN

Architectural Recessed

Sample Part # AD22-A-830-G1-u-ol1-1-0-W-QS

QS must be listed at the end of the part number¹

¹Quick Ship items must be on their own purchase order. QS must be listed at the end of the part number to qualify for the Quick Ship timeline. Orders submitted without QS at the end of the part number will be entered with a standard lead-time. ² Custom outputs are also included, but they must be between the high and low outputs listed on the Spec Sheets. ³ Maximum of 12 inside corners and 12 horizontal corners per Quick Ship order. ⁴ Submittal drawing required for all Battery Packs, Emergency Circuits, patterns, and continuous row configurations. ⁵ End filler option used for fitting fixture into odd lengths. Filler is non-illuminated. Left and right end filler provided with EF specified. Please consult factory for orders with more than 25 end fillers.

AD22

LU22



Shielding

V Satine
W White rails
(for LUCEN only)
S Silver rails
(for LUCEN only)

CRI, CCT & Output ²

8 80 CRI only. All color temperatures, all lumen packages listed on spec sheet

CL Custom Lumens

CW CustomWatts

Mounting

G1 1" T-Bar
9/16" T-Bar
GS Screw Slot

Voltage

U Universal (120-277)
1 120V
2 277V

Driver

OL1 Osram 10% 0-10v, std
OL2 Osram 1% 0-10v
LH1 Lutron Hi-Lume, 1% EcoSystem
PL2 Philips Xitanium 1% 0-10v
ND Non-Dimming

Circuiting ⁴

1 Single Circuit
E Emergency
N Night Light

Battery ⁴

0 None
IL Iota 10W Integral

Finish

W White

Options

CP Chicago Plenum
GLR Internal Fast Blow Fuse
FW6 6', 18-gauge, Flex Whip

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

AD24

LU24



Shielding

V Satine
W White rails
(for LUCEN only)
S Silver rails
(for LUCEN only)

CRI, CCT & Output ²

8 80 CRI only. All color temperatures, all lumen packages listed on spec sheet

CL Custom Lumens

CW CustomWatts

Mounting

G1 1" T-Bar
9/16" T-Bar
GS Screw Slot

Voltage

U Universal (120-277)
1 120V
2 277V

Driver

OL1 Osram 10% 0-10v, std
OL2 Osram 1% 0-10v
LH1 Lutron Hi-Lume, 1% EcoSystem
PL2 Philips Xitanium 1% 0-10v
ND Non-Dimming

Circuiting ⁴

1 Single Circuit
E Emergency
N Night Light

Battery ⁴

0 None
IL Iota 10W Integral

Finish

W White

Options

CP Chicago Plenum
GLR Internal Fast Blow Fuse
FW6 6', 18-gauge, Flex Whip

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

AD14

LU14



Shielding

V Satine
W White rails
(for LUCEN only)
S Silver rails
(for LUCEN only)

CRI, CCT & Output ²

8 80 CRI only. All color temperatures, all lumen packages listed on spec sheet

CL Custom Lumens

CW CustomWatts

Mounting

G1 1" T-Bar
9/16" T-Bar
GS Screw Slot

Voltage

U Universal (120-277)
1 120V
2 277V

Driver

OL1 Osram 10% 0-10v, std
OL2 Osram 1% 0-10v
LH1 Lutron Hi-Lume, 1% EcoSystem
PL2 Philips Xitanium 1% 0-10v
ND Non-Dimming

Circuiting ⁴

1 Single Circuit
E Emergency
N Night Light

Battery ⁴

0 None
IL Iota 10W Integral

Finish

W White

Options

CP Chicago Plenum
GLR Internal Fast Blow Fuse
FW6 6', 18-gauge, Flex Whip

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.



P I N N A C L E
ARCHITECTURAL LIGHTING®

3801 Havana St. Denver CO, 80239

Phone: 303.322.5570

www.pinnacle-ltg.com

December 2020

© 2020 Pinnacle Architectural
Lighting®

Specifications and dimensions subject to change without notice. Specification sheets and brochures that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

A brand of  **legrand®**