


DEFINE YOUR SPACE

OUTLINE, GRAZE, AND WASH YOUR WALLS FOR **INSPIRING INTERIORS**



A brand of **[] legrand**

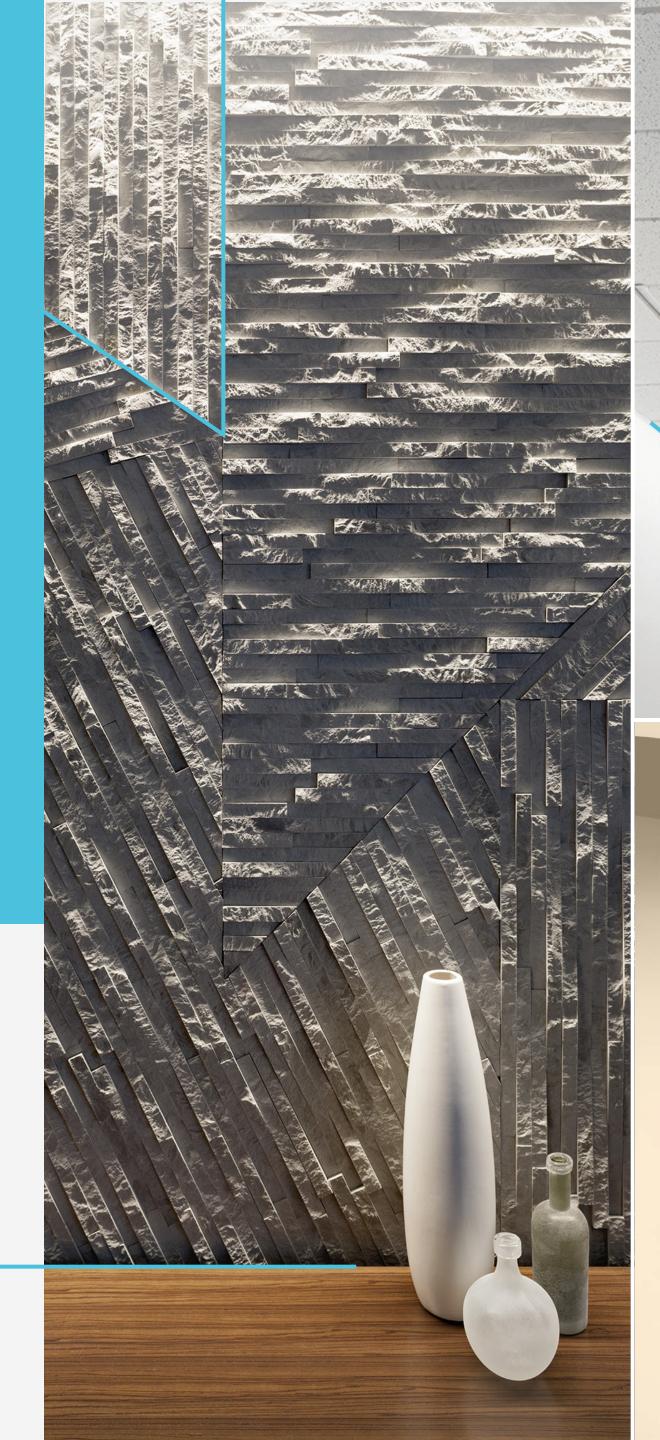





DEFINE YOUR SPACE

Ŧ

Vision is predominately vertical. Glowing wall surfaces are essential to both functionality and character. Creating another tool to further enhance your space, Outline, Wall Grazer, and Wall Wash give you illuminated versatility whether you want to fill a corridor with light, highlight a textured feature wall, or draw focus to a beautiful piece of artwork.









2


OUTLINE A ROOM

Dramatic effect and functionality come together in our Edge Evolution Outline. Ideal for hallways and corridors, this fixture casts a striking halo 18" to 20" below the ceiling plane, which then projects soft, illumination into a space.

EDGE EVOLUTION OUTLINE

Part: EVL-35HO Light Level (fc): 15 fc avg. Floorplane: min. 7 fc, max. 22 fc 1.0 WPSF

OUTLINE




GRAZE A TEXTURE

Designed to highlight textures both subtle and bold — as well as everything in between — the Edge Evolution Wall Grazer is a designer's tool for creating striking feature walls.

EDGE EVOLUTION WALL GRAZER

Part: EV3WG-35HO Light Level (fc): 21 fc avg. Verticals: min. 5 fc, max. 60 fc 13'x10' wall, 154.1 watts

WALL GRAZER




WASH A WALL


Edge Evolution Wall Wash takes wall washing to new heights using a seamless beam of light with exceptional optical control for uniform, shadow-free illumination from ceiling to floor.

EDGE EVOLUTION WALL WASH

Part: EV3WW-35HO Light Level (fc): 30 fc avg. Verticals: min. 6 fc, max. 63 fc 24'x10' wall, 241.8 watts


WALL WASH



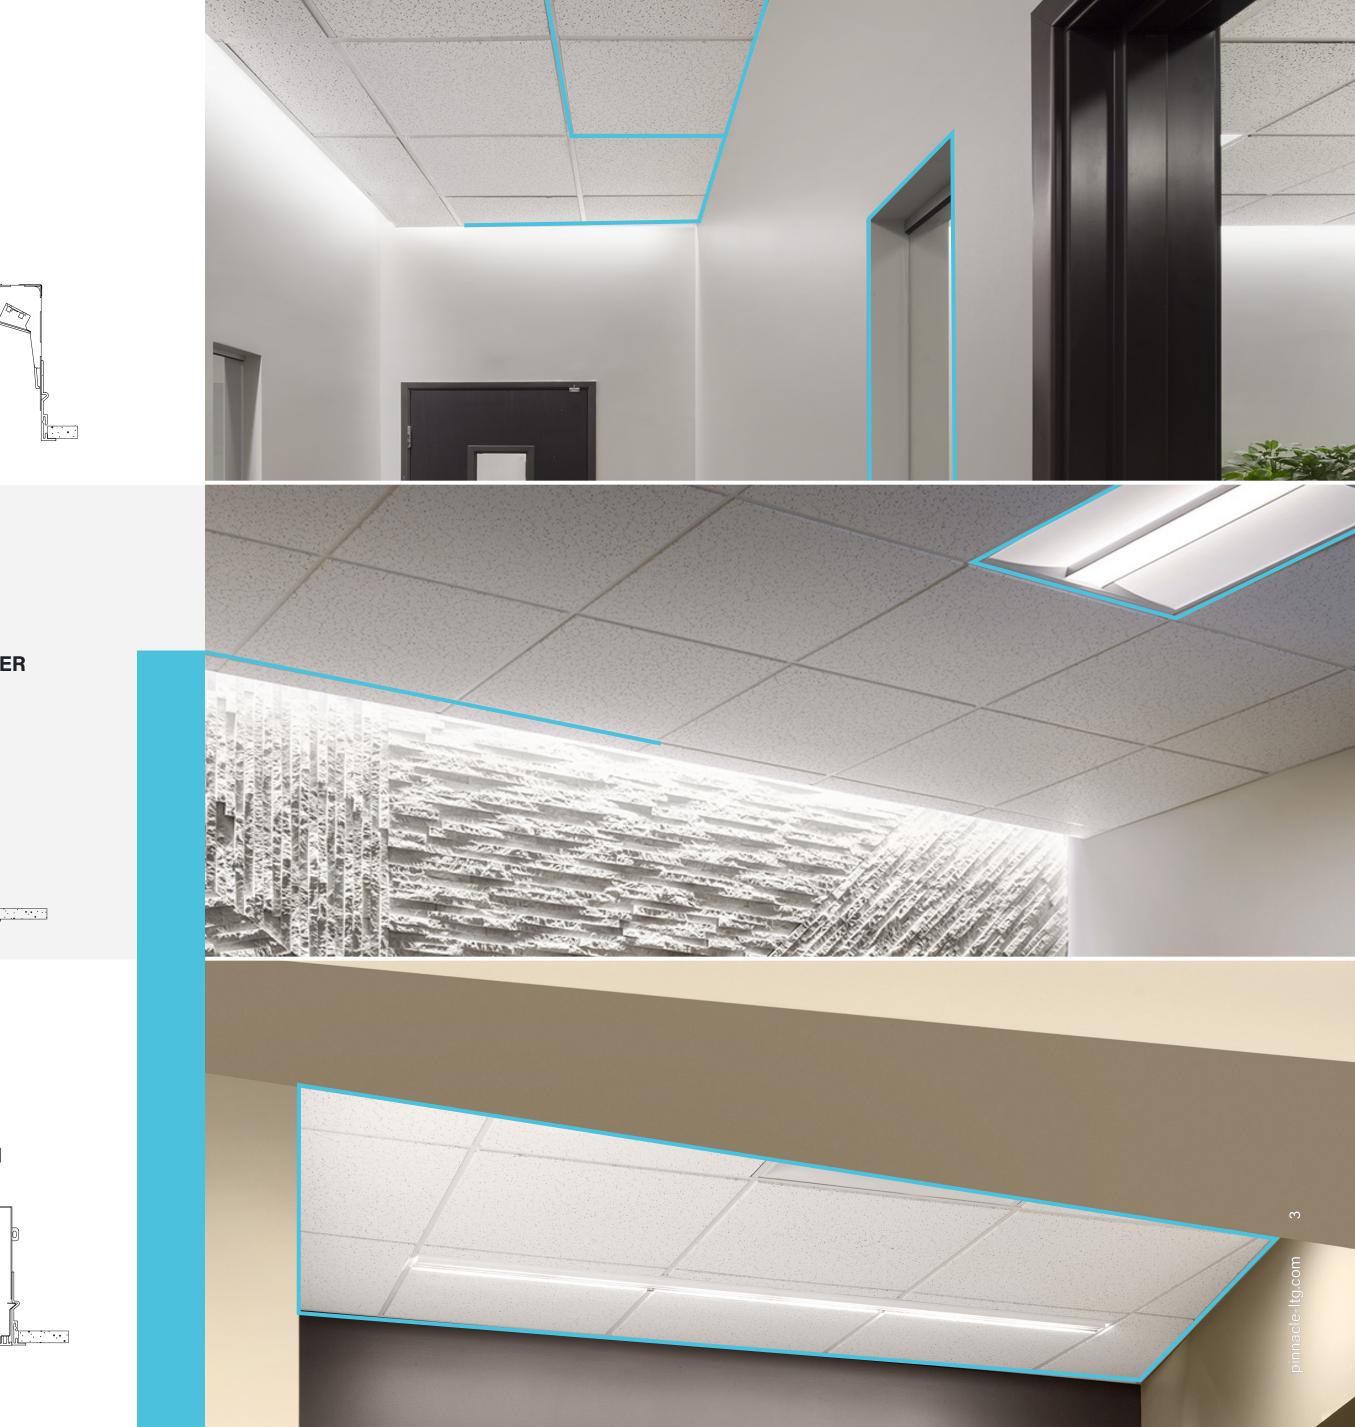


OUTLINE AROOM

Outline provides increased flexibility by offering fixtures in two heights - the standard at 5-1/4" and the shallow plenum option at 4-1/4". The standard housing has a 35 degree cutoff, while the shallow plenum fixture's cutoff is 25 degrees. Consistent performance with both allows for mixed use on a single project. Optional inside corners, outside corners, and end fillers give even more diversity to this product family.

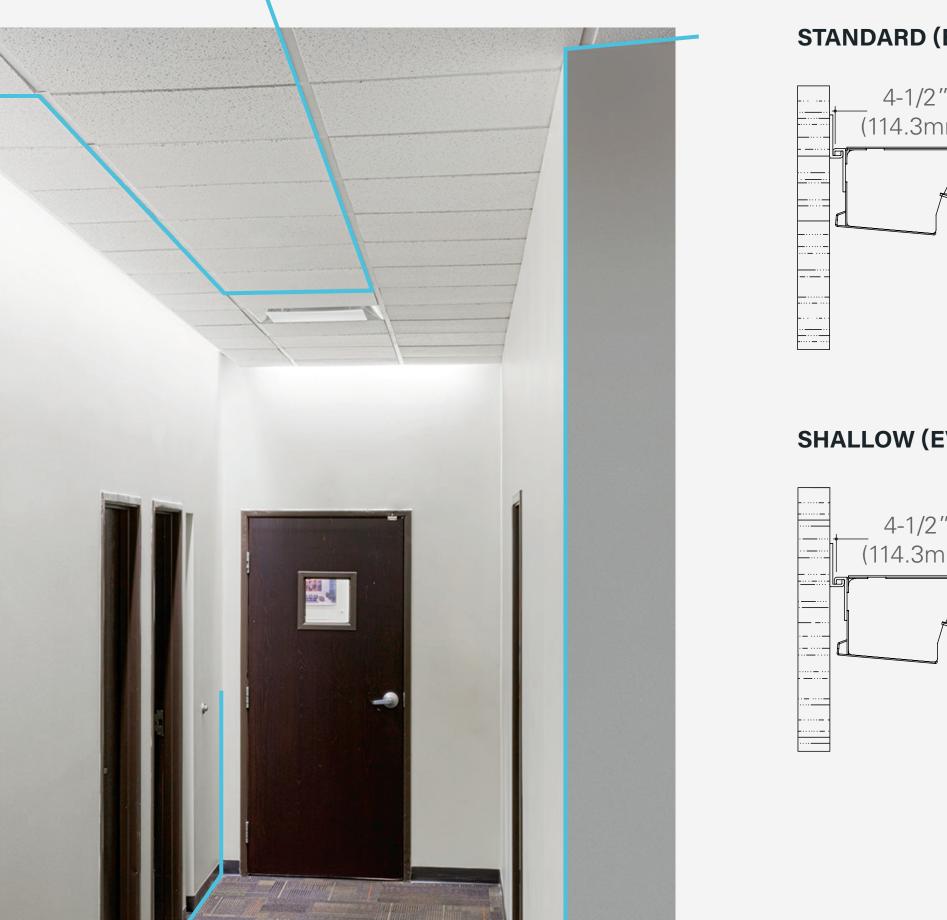

STANDARD (EVL)

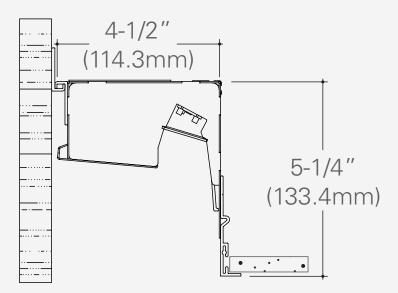


WALL UNIFORMITY

(Based on 3500K, high output)

9' Ceiling 23:1 12' Ceiling 38:1 15' Ceiling 54:1

SHALLOW (EVLS)

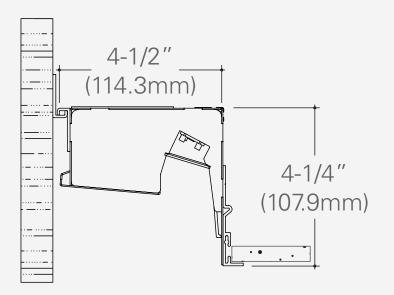







WRAP A CORNER WITH OUTLINE

Corner modules enable designers to completely wrap a room with light creating more visual interest and functionality than linear runs. Inside and outside corners are offered in both 45° and 90°. Each of the corner modules allow for +/- 5° of adjustability to accommodate any wall are slid into place to finish the perimeter lighting.


- imperfections. Specify runs to the nearest foot and corners

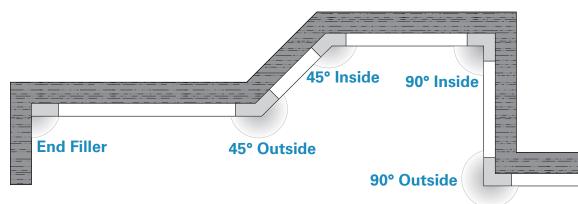


OUTSIDE CORNER INSTALLATION OVERVIEW




Step 1: Measure distance A and B to determine cut lengths.




Step 4: Secure top cover to housing with provided bracket. If necessary, trim top cover to allow electrical access.






Step 2: Cut (2) mitered Step 3: Attach end rails, and (2) end plates to dimension A and B from Step 1.





Step 5: Assemble mitered rails using 90° biscuit. Attach rails to incoming rows using biscuits.




Step 6: Completed installation.











GRAZEA TEXTURE

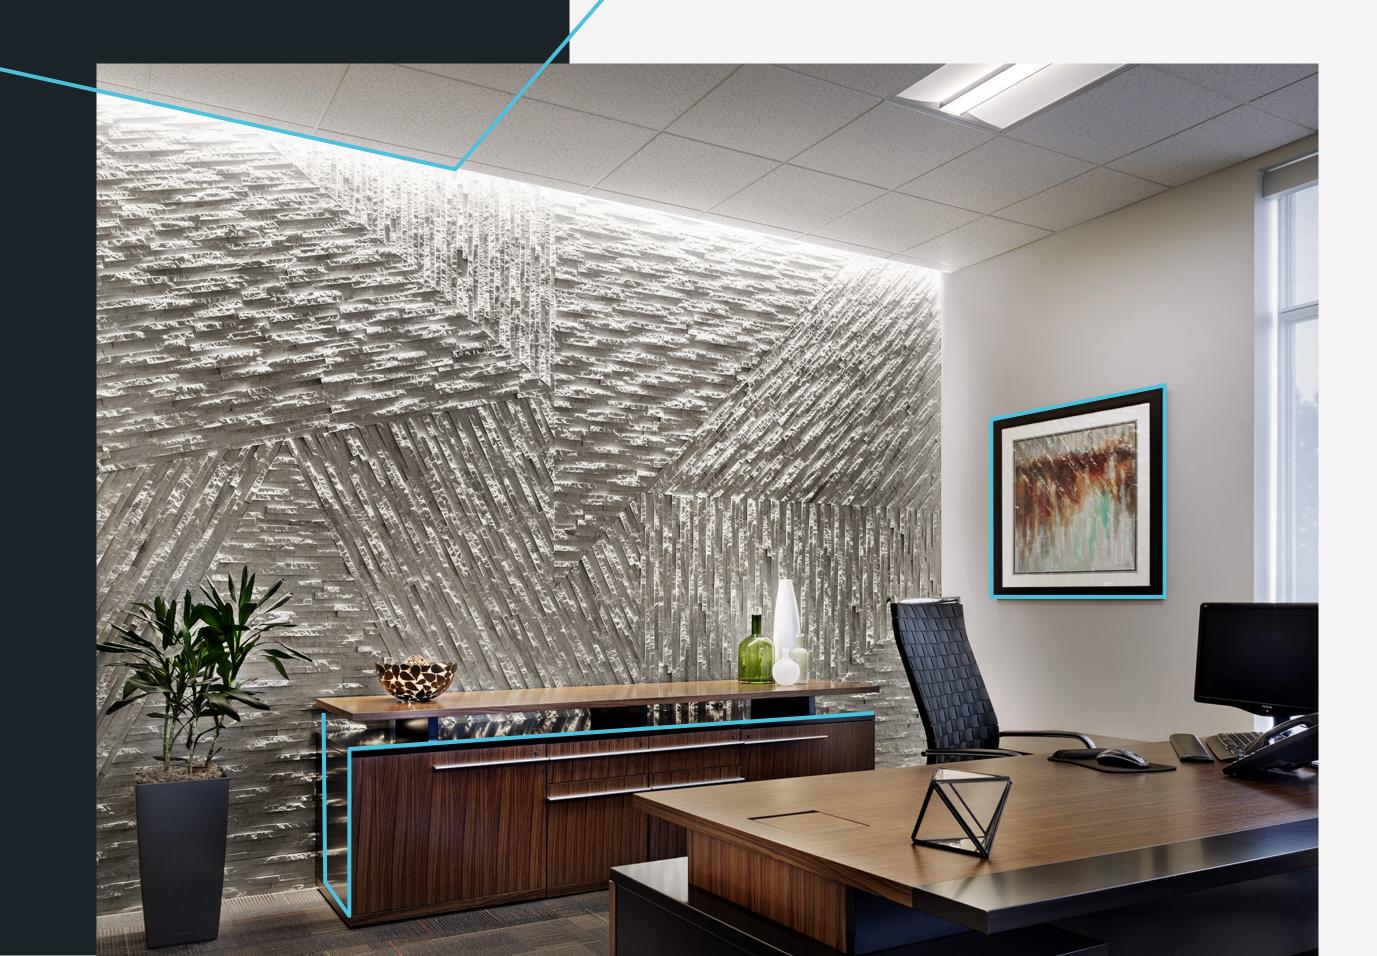


Utilizing a peak beam angle of 0.5 degrees, the innovative LED reflector system minimizes the bright spot at the top of the wall. This affords 13:1 wall uniformity that performs better than the competition, which can go as high as over 100:1. Specify with end fillers or inside and outside corners to completely wrap textured walls with light.

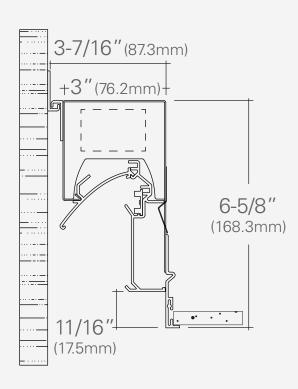


EDGE EVOLUTION WALL GRAZER

Part: EV3WG-35HO Light Level (fc): 23 fc avg. Verticals: min. 5 fc, max. 73 fc 13'x10' wall, 154.1 watts

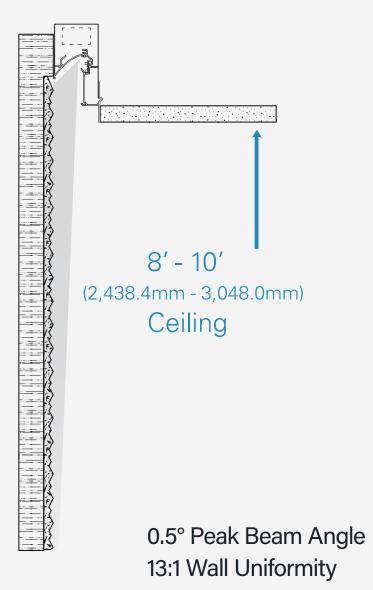





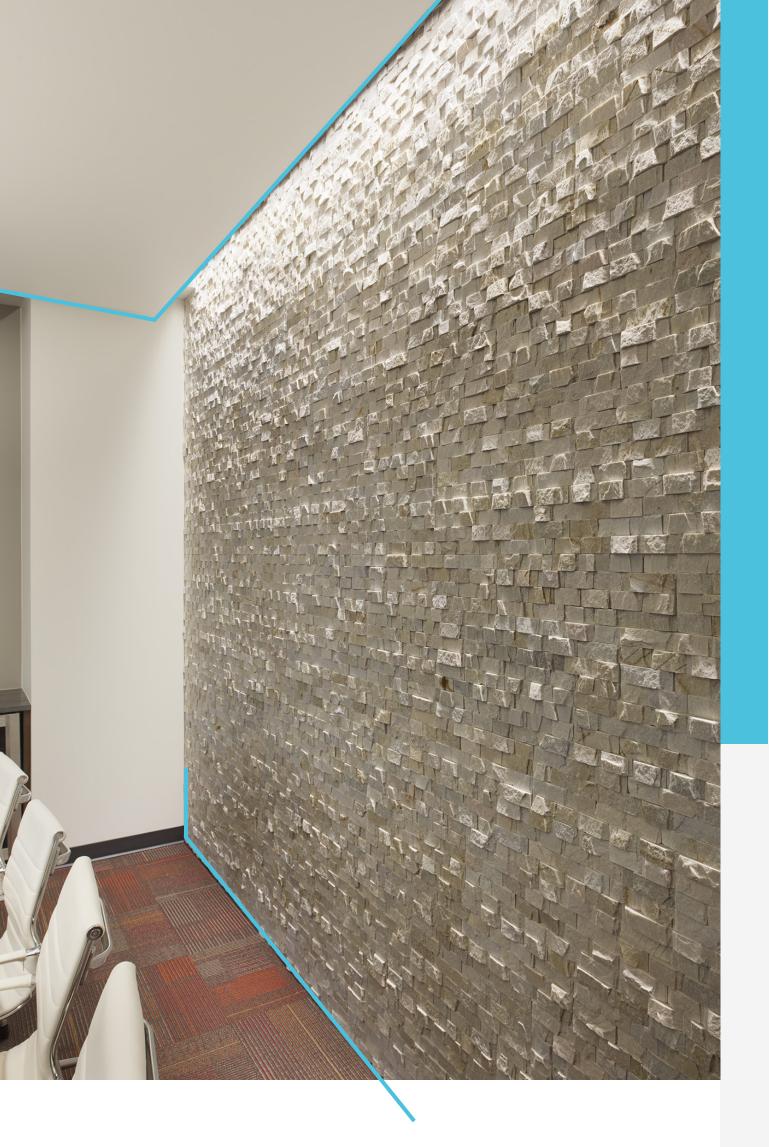


WRAP A CORNER WITH GRAZER

Corner modules enable designers to completely wrap a room with light and create more visual interest and functionality than linear runs alone. Inside and outside corners are offered in both 45° and 90° angles. Each of the corner modules allow for +/- 5 degrees of adjustability to accommodate any wall imperfections. Specify runs to the nearest foot. Non-illuminated corners are slid into place to complete the perimeter solution.

EDGE EVOLUTION WALL GRAZER


Part: EV3WG-35HO Light Level (fc): 20 fc avg. Verticals: min. 4 fc, max. 63 fc 16'x11' wall, 164.4 watts

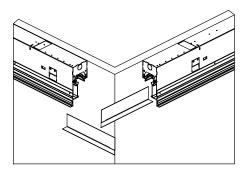


Step 1: Measure distance for fixture to corner for both

rows cut reflector pieces to fit and install into rows so


they meet in the corner.

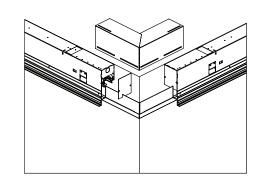

Step 2: Attach end plates and top covers to fixtures.

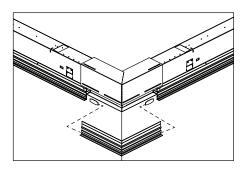

Step 3: Using the measurements from step 1, cut rail pieces to proper length, create the corner using the corner biscuit and join rails to fixtures.

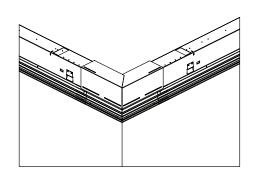


Step 4: Completed installation prior to ceiling installation.




WASH A WALL



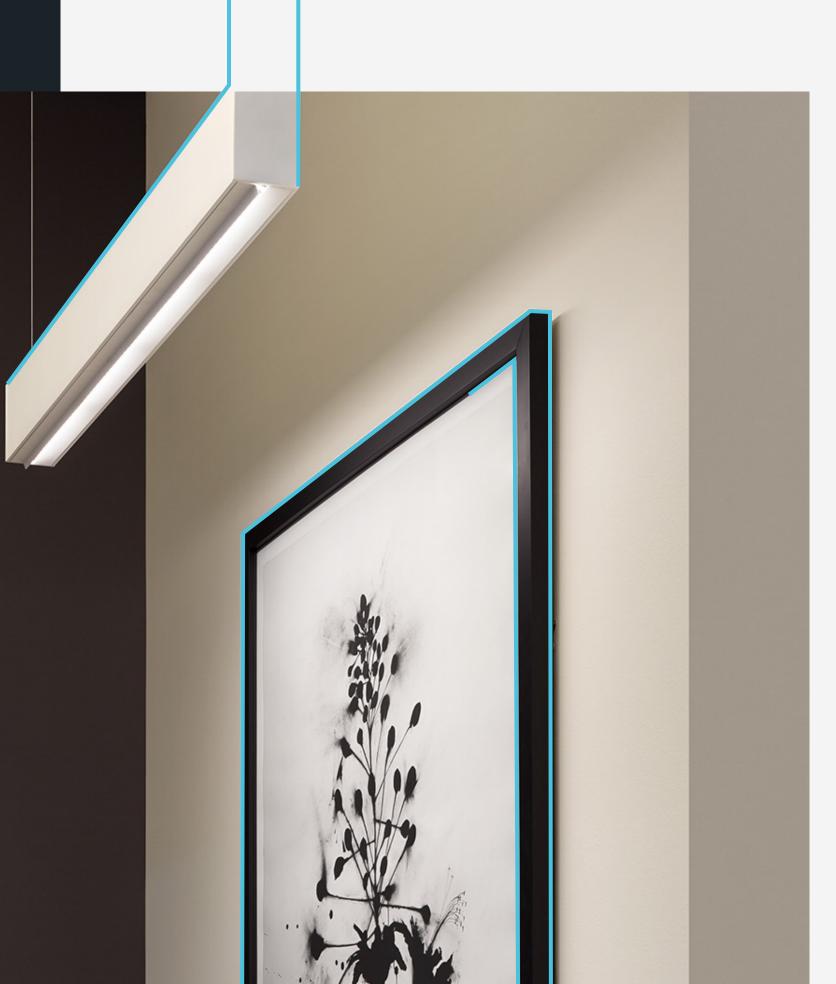

An efficient three piece reflector system allows the Wall Wash to be mounted closer to the wall than our previous linear fluorescent version and provides an impressive 7:1 wall uniformity. Reducing the kicker to only 1/2" minimizes the disruption to the ceiling plane, making the fixture almost unnoticeable. The Wall Wash is also available in suspended, direct and bidirectional housings to highlight art work or architectural features.



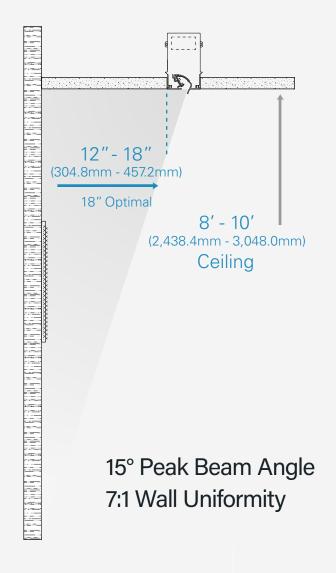

EDGE EVOLUTION WALL WASH

Part: EX3WW-35HO Light Level (fc): 28 fc avg. Verticals: min. 10 fc, max. 53 fc 6'x4' wall, 41.1 watts



PINNAL CLE

3801 Havana St. Denver CO, 80239 Phone: 303.322.5570 <u>www.pinnacle-ltg.com</u>

February 2021 © 2021 Pinnacle Architectural Lighting®

Specifications and dimensions subject to change without notice. Specification sheets and brochures that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

A brand of Lalegrand®

