



10 DAY QUICK SHIP




EDGE

Sample Part # EV3D-HE-830-24'-G1-U-ol1-T-0-W-QS

QS must be listed at the end of the part number¹

EV2D / 3D / 4D

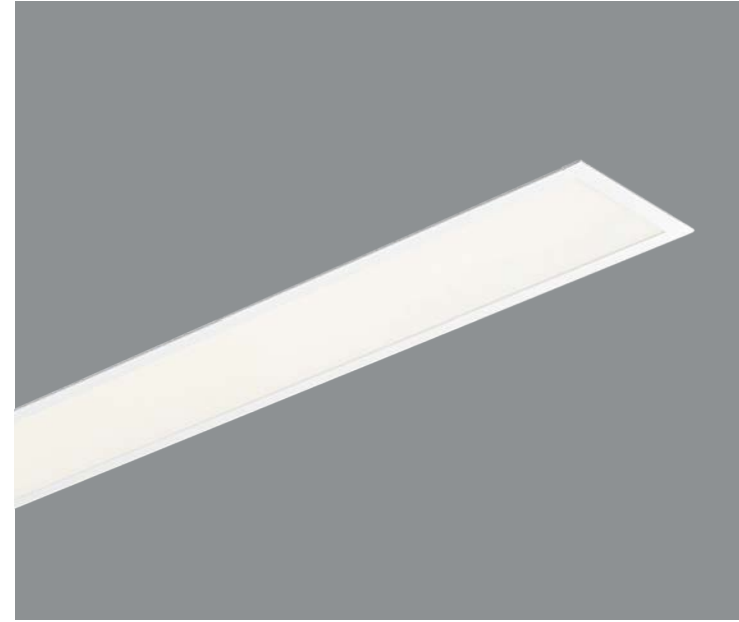

Shielding

- A** Satine
- HE** High
- BW** Batwing
- WHE** Asymmetric

CRI, CCT & Output²

- 8_____** 80 CRI only. All color temperatures, all lumen packages listed on spec sheet
- CL** Custom Lumens
- CW** Custom Watts

Length or Pattern³

- _** Individual Fixture
- __** Cont. Row (to an 1/8")
- L_X_** L-shape
- R_X_** Rectangle
- S_** Square
- U_X_** U-shape
- WC** Wall to ceiling

Mounting

- G1(G)** 1" T-Bar
- G9(G)** 9/16" T-Bar
- GS(G)** Screw Slot
- FL(F)** 1/2" Flange
- NF(N)** Flangeless
- SF(S)** Spackle Flange

Voltage

- U** Universal (120-277)
- 1** 120V
- 2** 277V

Driver

- OL1** Osram 10% / 0-10v, std
- OL2** Osram 1% / 0-10v
- LH1** Lutron Hi-Lume, 1% EcoSystem
- PL2** Philips Xitanium 1% 0-10v
- ND** Non-Dimming

Circuiting⁴

- 1** Single Circuit
- E** Emergency
- N** Night Light

Battery⁴

- 0** None
- IL** Iota 10W Integral

Finish

- W** White

Options

- CP** Chicago Plenum
- GLR** Internal Fast Blow Fuse

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

EVL / EVLS



CRI, CCT & Output²

- 8_____** 80 CRI only. All color temperatures, all lumen packages listed on spec sheet
- CL** Custom Lumens
- CW** Custom Watts

Length

- _** Individual Fixture
- __** Cont. Row(to the foot)

Mounting

- G1(G)** 1" T-Bar
- G9(G)** 9/16" T-Bar
- GS(G)** Screw Slot
- FL(F)** 1/2" Flange
- NF(N)** Flangeless
- SF(S)** Spackle Flange

Voltage

- U** Universal (120-277)
- 1** 120V
- 2** 277V

Driver

- OL1** Osram 10% / 0-10v, std
- OL2** Osram 1% / 0-10v
- LH1** Lutron Hi-Lume, 1% EcoSystem
- PL2** Philips Xitanium 1% 0-10v
- ND** Non-Dimming

Circuiting⁴

- 1** Single Circuit
- E** Emergency
- N** Night Light

Battery⁴

- 0** None
- IL** Iota 10W Integral

Finish

- W** White

Options

- CP** Chicago Plenum
- GLR** Internal Fast Blow Fuse
- EF** End Filler⁵

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

EV3WW



CRI, CCT & Output²

- 8_____** 80 CRI only. All color temperatures, all lumen packages listed on spec sheet
- CL** Custom Lumens
- CW** Custom Watts

Length

- _** Individual Fixture
- __** Cont. Row(to the foot)

Mounting

- G1(G)** 1" T-Bar
- G9(G)** 9/16" T-Bar
- GS(G)** Screw Slot
- FL(F)** 1/2" Flange
- NF(N)** Flangeless
- SF(S)** Spackle Flange

Voltage

- U** Universal (120-277)
- 1** 120V
- 2** 277V

Driver

- OL1** Osram 10% / 0-10v, std
- OL2** Osram 1% / 0-10v
- LH1** Lutron Hi-Lume, 1% EcoSystem
- PL2** Philips Xitanium 1% 0-10v
- ND** Non-Dimming

Circuiting⁴

- 1** Single Circuit
- E** Emergency
- N** Night Light

Battery⁴

- 0** None
- IL** Iota 10W Integral

Finish

- W** White

Options

- CP** Chicago Plenum
- GLR** Internal Fast Blow Fuse
- EF** End Filler⁵


All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

EDGE EX

Sample Part # EX3D-HE-N-830-24'-AC48G1-U-ol1-1-0-W-QS

QS must be listed at the end of the part number¹


EX2D / 3D / 4D
EX2DI / 3DI / 4DI
EX2I / 3I / 4I

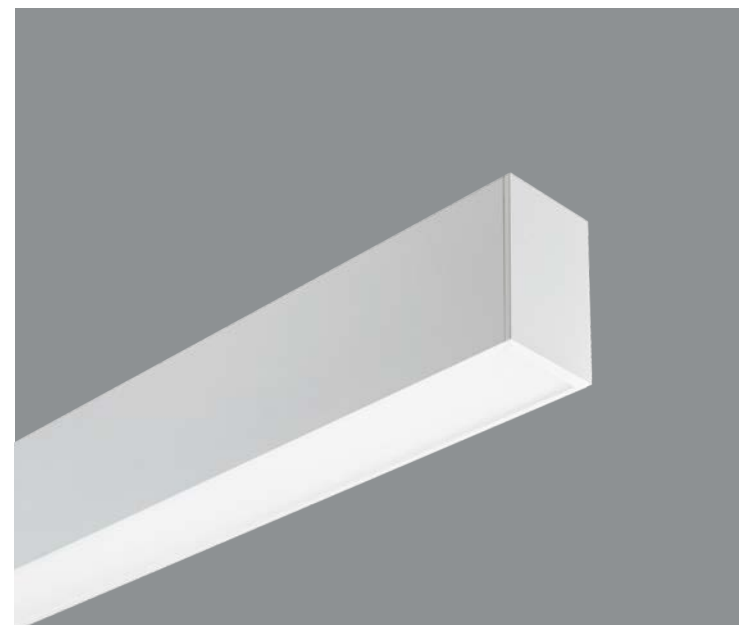

Direct Shielding		CRI, CCT & Output ²	Length or Pattern ³	Mounting	Voltage	Driver	Circuiting ⁴	Battery ⁴	Finish	Options
V	Satine	8 80 CRI only. All color temperatures, all lumen packages listed on spec sheet	_ Individual Fixture	(M) C48G_ Grid	U Universal (120-277)	OL1 Osram 10% / 0-10v, std	1 Single Circuit	0 None	W White	GLR Internal Fast Blow Fuse
HE	High Efficiency		-- Cont. Row (to the foot)	(M)AC48JB Junction Box	1 120V	OL2 Osram 1% / 0-10v	E Emergency	IL Iota 10W Integral	S Silver	
BW	Batwing		L_X_ L-shape	(M)AC48ST Structure	2 277V	LH1 Lutron Hi-Lume, 1% EcoSystem	N Night Light		BL Textured Black	
WHE	Asymmetric		R_X_ Rectangle	WA Wall		PL2 Philips Xitanium 1% 0-10v				
N	None Indirect fixture only	CL Custom Lumens	S_ Square	S Surface		ND Non-Dimming				
		CW Custom Watts	U_X_ U-shape							
Indirect Shielding										
HE	High Efficiency									
BW	Batwing									
WHE	Asymmetric									
N	None <small>Direct fixture only</small>									

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Black QuickShip only available in 4', 6', and 8' individual lengths. Consult factory for larger projects.

EX3WW

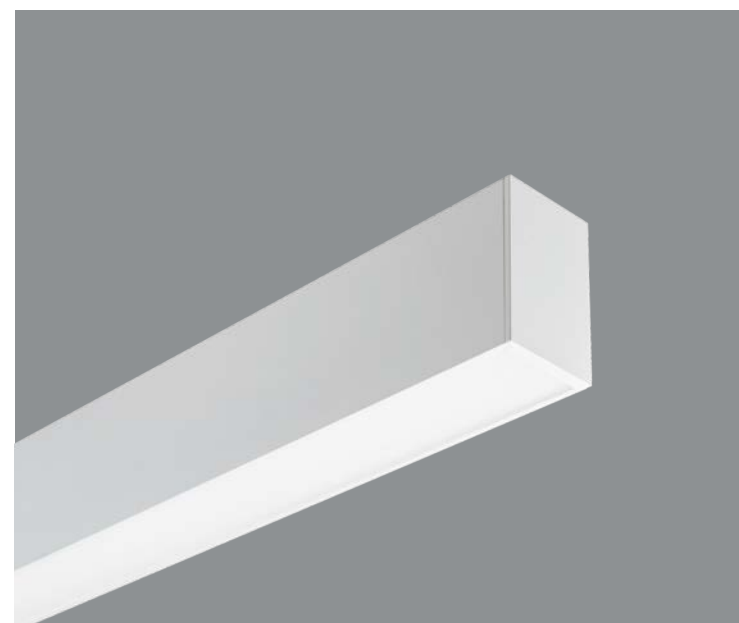

Direct Shielding		CRI, CCT & Output ²	Length or Pattern ³	Mounting	Voltage	Driver	Circuiting ⁴	Battery ⁴	Finish	Options
WW	Wall Wash	8 80 CRI only. All color temperatures, all lumen packages listed on spec sheet	_ Individual Fixture	(M)AC48G_ Grid	U Universal (120-277)	OL1 Osram 10% / 0-10v, std	1 Single Circuit	0 None	W White	GLR Internal Fast Blow Fuse
			-- Cont. Row (to the foot)	(M)AC48JB Junction Box	1 120V	OL2 Osram 1% / 0-10v	E Emergency	IL Iota 10W Integral	S Silver	
			CL Custom Lumens	(M)AC48ST Structure	2 277V	LH1 Lutron Hi-Lume, 1% EcoSystem	N Night Light			
			CW Custom Watts	S Surface		PL2 Philips Xitanium 1% 0-10v				
						ND Non-Dimming				

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Black QuickShip only available in 4', 6', and 8' individual lengths. Consult factory for larger projects.

TESA

Sample Part # T4A-835VHO-16'-AC48G1-U-OL1-1-0-W-QS

QS must be listed at the end of the part number*



T4A

Shielding

A Satine

CRI, CCT & Output ²

8 80 CRI only. All color temperatures, all lumen packages listed on spec sheet

CL Custom Lumens
CW Custom Watts

Length

— Individual Fixture (4', 8')

--- Cont. Row (in 4' increments)

Mounting

AC48G Grid

AC48JB Junction Box Structure
AC48ST Structure

Voltage

U Universal (120-277)

1 120V

2 277V

Driver

OL1 Osram 10% 0-10v, std

OL2 Osram 1% 0-10v
LH1 Lutron Hi-Lume, 1% EcoSystem

PL2 Philips Xitanium 1% 0-10v

ND Non-Dimming

Circuiting⁴

1 Single Circuit

E Emergency

N Night Light

Battery⁴

0 None

IR Iota 10W (remote)

Finish

W White

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

COVE

Sample Part # C-830HO-26'-CV-U-OL1-1-0-N-QS

QS must be listed at the end of the part number*

CRI, CCT & Output ²

- 8 80 CRI only. All color temperatures, all lumen packages listed on spec sheet
- CL Custom Lumens
- CW Custom Watts

Length

- Individual Fixture (2', 3', 4', 6', 8')
- - Cont. Row (in 1' increments)

Mounting

- CV COVE Mounting

Voltage

- U Universal (120-277)
- 1 120V
- 2 277V

Driver

- OL1 Osram 10% 0-10v, std
- OL2 Osram 1% 0-10v
- LH1 Lutron Hi-Lume, 1% EcoSystem
- PL2 Philips Xitanium 1% 0-10v

Circuiting⁴

- 1 Single Circuit
- E Emergency
- N Night Light

Battery⁴

- 0 None
- IL Iota 10W Integral (low profile)

Finish

- N Natural



All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

LINERO

Sample Part # L8DI-A-70-835-16'-AC48JB-U-OL1-1-0-W-QS

QS must be listed at the end of the part number*



L6DI-A-40 / L6DI-A-70
L6DI-A-100



Shielding	CRI, CCT & Output ²	Length	Mounting	Voltage	Driver	Circuiting ⁴	Battery ⁴	Finish
A Satine	8 80 CRI only. All color temperatures, all lumen packages listed on spec sheet CL Custom Lumens CW CustomWatts	Individual Fixture (4', 6', 8') Cont. Row (in 2' increments starting at 4')	AC48G Grid AC48JB Junction Box AC48ST Structure	U Universal (120-277) 1 120V 2 277V	OL1 Osram 10% 0-10v, std OL2 Osram 1% 0-10v LH1 Lutron Hi-Lume, 1% EcoSystem PL2 Philips Xitanium 1% 0-10v	1 Single Circuit E Emergency N Night Light	PL Philips Bodine 10W - low profile	W White

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

L8DI-A-40 / L8DI-A-70
L8DI-A-100




Shielding	CRI, CCT & Output ²	Length	Mounting	Voltage	Driver	Circuiting ⁴	Battery ⁴	Finish
A Satine	8 80 CRI only. All color temperatures, all lumen packages listed on spec sheet CL Custom Lumens CW CustomWatts	Individual Fixture (4', 6', 8') Cont. Row (in 2' increments starting at 4')	AC48G Grid AC48JB Junction Box AC48ST Structure	U Universal (120-277) 1 120V 2 277V	OL1 Osram 10% 0-10v, std OL2 Osram 1% 0-10v LH1 Lutron Hi-Lume, 1% EcoSystem PL2 Philips Xitanium 1% 0-10v	1 Single Circuit E Emergency N Night Light	PL Philips Bodine 10W - low profile	W White

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.


ADEO/LUCEN

Architectural Recessed


¹Quick Ship items must be on their own purchase order. QS must be listed at the end of the part number to qualify for the Quick Ship timeline. Orders submitted without QS at the end of the part number will be entered with a standard lead-time. ² Custom outputs are also included, but they must be between the high and low outputs listed on the Spec Sheets. ³ Maximum of 12 inside corners and 12 horizontal corners per Quick Ship order. ⁴ Submittal drawing required for all Battery Packs, Emergency Circuits, patterns, and continuous row configurations. ⁵ End filler option used for fitting fixture into odd lengths. Filler is non-illuminated. Left and right end filler provided with EF specified. Please consult factory for orders with more than 25 end fillers.

AD22		Shielding	CRI, CCT & Output ²	Mounting	Voltage	Driver	Circuiting ⁴	Battery ⁴	Finish	Options
LU22		V Satine W White rails (for LUCEN only) S Silver rails (for LUCEN only)	8 80 CRI only. All color temperatures, all lumen packages listed on spec sheet CL Custom Lumens CW CustomWatts	G1 1" T-Bar GS 9/16" T-Bar Screw Slot	U Universal (120-277) 1 120V 2 277V	OL1 Osram 10% 0-10v, std OL2 Osram 1% 0-10v LH1 Lutron Hi-Lume, 1% EcoSystem PL2 Philips Xitanium 1% 0-10v ND Non-Dimming	1 Single Circuit E Emergency N Night Light	0 None IL Iota 10W Integral	W White	CP Chicago Plenum GLR Internal Fast Blow Fuse FW6 6', 18-gauge, Flex Whip

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

AD24		Shielding	CRI, CCT & Output ²	Mounting	Voltage	Driver	Circuiting ⁴	Battery ⁴	Finish	Options
LU24		V Satine W White rails (for LUCEN only) S Silver rails (for LUCEN only)	8 80 CRI only. All color temperatures, all lumen packages listed on spec sheet CL Custom Lumens CW CustomWatts	G1 1" T-Bar GS 9/16" T-Bar Screw Slot	U Universal (120-277) 1 120V 2 277V	OL1 Osram 10% 0-10v, std OL2 Osram 1% 0-10v LH1 Lutron Hi-Lume, 1% EcoSystem PL2 Philips Xitanium 1% 0-10v ND Non-Dimming	1 Single Circuit E Emergency N Night Light	0 None IL Iota 10W Integral	W White	CP Chicago Plenum GLR Internal Fast Blow Fuse FW6 6', 18-gauge, Flex Whip

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

AD14		Shielding	CRI, CCT & Output ²	Mounting	Voltage	Driver	Circuiting ⁴	Battery ⁴	Finish	Options
LU14		V Satine W White rails (for LUCEN only) S Silver rails (for LUCEN only)	8 80 CRI only. All color temperatures, all lumen packages listed on spec sheet CL Custom Lumens CW CustomWatts	G1 1" T-Bar GS 9/16" T-Bar Screw Slot	U Universal (120-277) 1 120V 2 277V	OL1 Osram 10% 0-10v, std OL2 Osram 1% 0-10v LH1 Lutron Hi-Lume, 1% EcoSystem PL2 Philips Xitanium 1% 0-10v ND Non-Dimming	1 Single Circuit E Emergency N Night Light	0 None IL Iota 10W Integral	W White	CP Chicago Plenum GLR Internal Fast Blow Fuse FW6 6', 18-gauge, Flex Whip

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.





P I N N A C L E
ARCHITECTURAL LIGHTING®

3801 Havana St. Denver CO, 80239

Phone: 303.322.5570

www.pinnacle-ltg.com

December 2020

© 2020 Pinnacle Architectural
Lighting®

Specifications and dimensions subject to change without notice. Specification sheets and brochures that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

A brand of  **legrand**®