

# EDGE EX4DI

## 4" Suspended Direct/Indirect Linear

### Key Features

- Boards and driver are specifically for Indigo Clean®
- Indigo Clean® is safe and effective at killing SARS-CoV-2, Influenza-A, Staph Aureus and a list of pathogens that negatively impact health
- Standard, white luminaire that provides on-demand disinfection when light is on
- Laboratory-tested disinfection
- Unlike UV disinfection, light is safe for occupants
- Proven effectiveness per independent lab test results
- Provides a cleaner, safer environment, even in areas normal cleaning doesn't reach



Example Part #: EX4DI-HE-HE-IC37-IC37-26'-AC48G1-U-ND-1-0-W



HE	HE	---	---
DIRECT SHIELDING	INDIRECT SHIELDING	DIRECT SOURCE	INDIRECT SOURCE
HE - High Efficiency	HE - High Efficiency	IC37__ - Indigo Clean LED, 3700K IC43__ - Indigo Clean LED, 4300K <i>Direct Source pg. 2</i>	IC37__ - Indigo Clean LED, 3700K IC43__ - Indigo Clean LED, 4300K <i>Indirect Source pg. 2</i>
LENGTH <sup>1</sup>	MOUNTING <sup>2</sup>	VOLTAGE	DRIVER <sup>3</sup>
__ - Individual Fixture ___ - Continuous Row <i>Length pg. 2</i>	<u>AC</u> <u>G</u> - (M)AC to Grid <u>AC</u> <u>JB</u> - (M)AC to J Box <u>AC</u> <u>ST</u> - (M)AC to Structure <u>AC5</u> <u>G</u> - 5" Non-Power Canopy <u>AC5</u> <u>JB</u> - 5" Non-Power Canopy <u>SQ</u> <u>G</u> - 5" Square Canopy <u>SQ</u> <u>JB</u> - 5" Square Canopy <u>WA</u> - Wall Mount <i>Mounting pg. 3</i>	<b>U</b> - Universal <i>(120 thru 277V)</i> <b>1</b> - 120V <b>2</b> - 277V <b>3</b> - 347V <i>Voltage pg. 3</i>	<b>PL2</b> - Advance Xitanium (1%, 0-10v) <b>ND</b> - Non-Dimming <i>Driver pg. 3</i>
CIRCUITING	BATTERY & EMERGENCY <sup>4</sup>	FINISH	FIXTURE OPTIONS
<b>1</b> - Single Circuit <b>2</b> - Dual Circuit <b>M</b> - Multi Circuit <b>E</b> - Emergency <i>(entire fixture)</i> <b>N</b> - Night Light <i>(entire fixture)</i> <i>Circuiting pg. 4</i>	<b>0</b> - None <b>P</b> - Bodine 10W <b>IC</b> - Iota 10W <i>(CEC Listed)</i> <b>G</b> - Bodine GTD <i>Battery and Emergency pg. 4</i>	<b>W</b> - White <b>S</b> - Metallic Silver <b>BL</b> - Textured Black <b>BR</b> - Bronze <b>GR</b> - Graphite <b>CC</b> - Custom Color <i>Finish pg. 4</i>	<b>AM</b> - Antimicrobial Paint <i>Fixture Options pg. 4</i>

<sup>1</sup>Individual fixtures come in 2', 4', 6' & 8' lengths. Continuous row come in 2' increments. <sup>2</sup>Specify AC Cable: Standard single AC = AC or Movable AC = MAC; Specify AC length standard AC is 48"; Specify grid: G1=15/16", G9=9/16", GS=Screw Slot. Example: AC48G1. <sup>3</sup>While we do offer dimmable driver options, please note that dimming is not recommended with Indigo-Clean fixtures as it can reduce the efficiency of disinfection. <sup>4</sup>Enter quantity for Battery, Example 2P.

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



### Direct Source<sup>1</sup>

- 80 CRI = R9≥19

#### Indigo Clean LED

	Color	Watt <i>per foot</i>	Shielding <b>HE</b> High Efficiency	
			<i>Lumens/ft</i>	<i>LPW</i>
<b>IC37LO</b>	3700K	5.5	626	113.8
<b>IC37HO</b>	3700K	10.7	1151	107.6
<b>IC43LO</b>	4300K	5.5	641	116.5
<b>IC43HO</b>	4300K	10.7	1178	110.1

### Indirect Source<sup>1</sup>

- 80 CRI = R9≥19

#### Indigo Clean LED

	Color	Watt <i>per foot</i>	Shielding <b>HE</b> High Efficiency	
			<i>Lumens/ft</i>	<i>LPW</i>
<b>IC37LO</b>	3700K	5.5	679	123.5
<b>IC37HO</b>	3700K	10.7	1247	116.5
<b>IC43LO</b>	4300K	5.5	689	125.3
<b>IC43HO</b>	4300K	10.7	1265	118.2

<sup>1</sup>LPW and watts/ft based off 48" fixture size.

### Length

- For Continuous Runs, add 3/16" (4.7mm) for each end plate or 3/8" (9.5mm) to the overall length of the row
- Individual fixtures come in 2', 4', 6' & 8' lengths. Continuous rows come in 2' increments.

<b>2</b>	<b>4</b>	<b>6</b>	<b>8</b>	–
Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Cont. Run
24-3/8" (619.1mm)				Specify nominal overall row length to the 2'
	48-3/8" (1228.7mm)			
		72-3/8" (1838.3mm)		
			96-3/8" (2447.9mm)	

Specify to the 2' >>>




## Mounting


- Specify cable length in ordering code (AC48G1)
- Standard specifiable lengths are 48", 120", 240" and 350"
- End plates and power cord attached at factory
- Aircraft cable (AC) mounts on 4' (1219.2mm) and 8' (2438.4mm) centers
- Maximum recommended movable mounting locations are 12" from end of 4' fixture and 18" from end of 8' fixture
- Aircraft Cable supplied with 5" (127mm) power and 2" (50.8mm) non-power canopies

- Canopies and pendants match fixture finish, power cords are white, grey, or black depending on fixture finish. See Finish section for additional details.
- Approved for dry/damp location unless otherwise noted
- Refer to installation instructions during installation at the job site
- Maximum fixture weight is 25 lbs for a standard 4' fixture
- AC\_GS and MAC\_GS – works with screw slot and bolt slot grid ceiling types
- Wall Mount – ADA Compliant, bracket is 1/2" off wall
- MAC options not available with HEA lens option
- MAC options not available with HEA lens option

<b>AC_G1</b>	Aircraft Cable 1" (15/16") T-Bar
<b>AC_G9</b>	Aircraft Cable 9/16" T-Bar
<b>AC_GS</b>	Aircraft Cable Screw Slot T-Bar
<b>AC_JB</b>	Aircraft Cable Junction Box
<b>AC_ST</b>	Aircraft Cable Structure
<b>AC5_G</b>	Aircraft Cable 5" (127mm) Non-Power Canopy
<b>AC5_JB</b>	Aircraft Cable 5" (127mm) Non-Power Canopy
<b>SQ_G</b>	Aircraft Cable 5" (127mm) Square Canopy
<b>SQ_JB</b>	Aircraft Cable 5" (127mm) Square Canopy
<b>MAC_G1</b>	Moveable AC 1" (15/16") T-Bar
<b>MAC_G9</b>	Moveable AC 9/16" T-Bar
<b>MAC_GS</b>	Moveable AC Screw Slot T-Bar
<b>MAC_JB</b>	Moveable AC Junction Box
<b>MAC_ST</b>	Moveable AC Structure
<b>MAC5_G</b>	Moveable AC 5" (127mm) Non-Power Canopy
<b>MAC5_JB</b>	Moveable AC 5" (127mm) Non-Power Canopy
<b>MSQ_G</b>	Moveable AC 5" (127mm) Square Canopy
<b>MSQ_JB</b>	Moveable AC 5" (127mm) Square Canopy
<b>WA</b>	Wall Mount

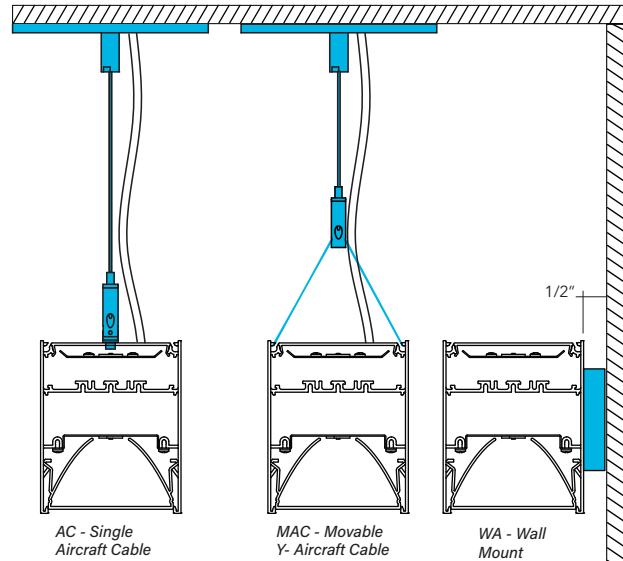

## Straight EDGE Joint System



- The Straight EDGE Joint comes standard for all runs.
- Two connection points – one to cinch fixtures together, the other to perfectly align all fixtures in a run.
- Factory-installed light shields on both sides of the fixture ensure no light leaks.
- Patented.

## Voltage

- Some EX4DI configurations will not accommodate all voltage options; consult with factory

<b>U</b>	Universal
<b>1</b>	120 volt
<b>2</b>	277 volt
<b>3</b>	347 volt

## Driver

- Standard Driver Option = PL2
- Driver Lifetime: 50,000 hours at 25°C ambient operating conditions
- For more driver options see Pinnacle Resource Guide
- Some EX4DI configurations will not accommodate all driver options; consult with factory

<b>PL2</b>	Advance Xitanium (1%, 0-10v)
<b>ND</b>	Non-Dimming



## How to Specify Circuiting, Battery and Emergency

- 1**
- Select fixture circuiting from options below
  - Some EX4DI configurations will not accommodate all circuiting options, consult with factory

### Circuiting

<b>1</b>	Single Circuit
<b>2</b>	Dual Circuit
<b>M</b>	Multi Circuit
<b>E</b>	Emergency Circuit only
<b>N</b>	Night Light Circuit only

- 2** + **3**
- Battery and emergency section options are available in addition to fixture circuit
  - Select battery and emergency section options below; factory shop drawing required
  - Some EX4DI configurations will not accommodate all circuiting options, consult with factory

### Battery and/or Emergency If Required

- 0** No battery or specific emergency section required

#### Battery

- Select battery section type if required, indicate total QTY. *Example 2PL*
- 90 minute battery runtime; test button location dependant on configuration, consult factory
- No battery option available for 2' or 3' lengths
- Entire direct fixture housing is on battery for lengths up to 5'
- Half of direct fixture is on battery for 6' or 8' housing lengths
- For more battery options available, see Pinnacle Resource Guide

#### For Approximate Battery Lumen Output

- Multiply battery wattage X fixture LPW shown on Lumen Table
- $92.3 \text{ (LPW)} \times 10 \text{ (watts)} = 923 \text{ battery lumen output}$

<b>0</b>	No battery
<b>_P</b>	Bodine 10w Integral
<b>_IC</b>	Iota 10w Integral <i>(CEC Listed)</i>

#### Battery OR Emergency Ordering Examples

- |  |                      |
|--|----------------------|
| • Single circuit, 10w Integral Battery | Ordering Code: 1-1PL |
| • Emergency only, 10w Integral Battery | Ordering Code: E-1PL |
| • Single circuit, GTD required         | Ordering Code: 1-1G  |

#### Emergency

- Select emergency section type if required, indicate total QTY. *Example 1E*
- Combine battery and emergency section ordering codes if both options are selected

<b>_E</b>	Emergency circuit section
<b>_N</b>	Night Light circuit section
<b>_L</b>	Life Safety circuit section NO THROUGH WIRE
<b>_G</b>	Philips Bodine GTD, Generator Transfer Device section

#### Combination Section Ordering Examples

- |  |                        |
|--|------------------------|
| • Single circuit, (1) 10w battery, (1) emergency section | Ordering Code: 1-1PL1E |
| • Multi circuit, (2) 10w battery, (2) emergency sections | Ordering Code: M-2PL2E |
| • Single circuit, (1) night light section                | Ordering Code: 1-1N    |

## Finish

- Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes
- Selecting a fixture finish other than white may impact lumen output; consult factory for more information

<b>W</b>	White <i>(white cord/white canopy)</i>
<b>S</b>	Metallic Silver <i>(grey cord/silver canopy)</i>
<b>BL</b>	Textured Black <i>(black cord/black canopy)</i>
<b>BR</b>	Bronze <i>(white cord/bronze canopy)</i>
<b>GR</b>	Graphite <i>(white cord/graphite canopy)</i>
<b>CC</b>	Custom Color <i>(white cord/color match canopy)</i>

## Fixture Options

- Additional options to enhance the fixture and finish of the product


<b>AM</b>	Antimicrobial Paint
-----------	---------------------



Photometrics

Satine Lens - Open

Test # Scaled from ITL93368 & ITL93372  
 Catalog # EX4DI-HE-HE-IC43HO-IC43HO-4  
 Lumens 9777 lm  
 Watts 85.6 W  
 Efficacy 114 LPW



Candela Distribution

Vert Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	2095	2095	2095	2095	2095
5	2083	2083	2081	2078	2078
15	1986	1968	1964	1952	1942
25	1790	1756	1740	1698	1676
35	1511	1474	1425	1359	1330
45	1185	1146	1077	1001	966
55	852	819	748	680	654
65	543	517	464	417	401
75	272	256	229	206	201
85	69	63	56	51	50
90	0	0	0	0	0
95	75	80	87	88	89
105	289	290	300	300	301
115	565	562	569	568	570
125	871	864	867	865	868
135	1187	1171	1179	1171	1171
145	1482	1460	1469	1463	1463
155	1716	1692	1709	1700	1701
165	1877	1863	1869	1867	1866
175	1952	1952	1952	1951	1952
180	1961	1961	1961	1961	1961

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	13791	12534	11242
55	12224	10732	9383
65	10573	9035	7808
75	8648	7281	6391
85	6515	5287	4721

For all available IES files, please visit our website at [pinnacle-ltg.com](http://pinnacle-ltg.com). Photometry testing in accordance to IESNA-LM-79-08 at an NVLAP accredited testing laboratory. Testing conducted at 25°C ambient conditions.

Applications & Certificates

**Construction:** 6063-T6 Extruded aluminum housing. Highly reflective steel white painted reflector.

**Shielding:** Diffuse snap-in acrylic lens, removable for maintenance.

**Mounting:** Aircraft cable and wall mount available. Select from 2 aircraft cable options. Select the straight aircraft cable that mounts on 4'-0" (1219.2mm) and 8'-0" (2438.4mm) centers or the moveable adjustable Y-cable mount. The Y-Cable design allows for adjustable mounting locations. Aircraft Cable supplied with 5" (127mm) power and 2" (50.8mm) non-power canopies. Refer to installation instructions for appropriate ceiling detail. Canopies are painted white unless otherwise specified. Maximum fixture weight is 20 lbs. for a standard 4' fixture.

**Indigo Clean LED:** Spectrum focused lighting for continuous environmental disinfection. 25°C test environment. Lumen output/wattage has a margin of +/- 5%. All luminaire configurations tested in accordance with IES LM-79. Diodes tested in accordance with IES LM-80. Lifetime calculated using IES TM-21. Minimum lifetime greater than 60,000 hours. L70 = 80,000 hours. MacAdam 3-Step Ellipses. Not all products are lighting facts listed. For all available IES files, please visit our website at [pinnacle-ltg.com](http://pinnacle-ltg.com).

**Voltage:** Universal (U), 120 volt (1), 277 volt (2) and 347 volt (3) options available. Must specify OL3 in Driver section when 347 volt (3) is selected. Some EDGE configurations will not accommodate all voltage options; consult with factory.

**Driver:** Standard Driver Option is Advance Xitanium 0-10v, 1% = PL2. Electronic driver, Power factor is >0.9 with a THD <20%. Driver Lifetime: 50,000 hours at 25°C ambient operating conditions. Ambient operating range: -20°F/-30°C to 120°F/49°C. For more driver options, see Pinnacle Resource Guide. Some EDGE configurations will not accommodate

all driver options.

**Circuiting:** Select from single circuit (1), Multi circuit - For multiple circuiting and zone control, requires factory shop drawing (M), Emergency circuit (E), Life Safety (L) or Night Light circuit (N). For emergency circuiting situations that require no through wire or circuit separation, Life Safety Circuit should be selected. This will provide a separate power feed and only the Life Safety Circuit in that section. Some EDGE configurations will not accommodate all circuiting options; consult with factory.

**Battery & Emergency:** Select battery or emergency options if required. If battery or emergency option is not required, enter 0. Battery duration is 90 minutes as standard. Test button location dependant on configuration, consult factory. For more Battery options, see Pinnacle Resource Guide.

**Finish:** Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes or for additional custom color and finish options.

**Controls:** Pinnacle is able to accommodate different control solutions from different manufacturers. Consult Factory for more information.

**Labels:** ETL listed conforming to UL 1598 and CSA 250. Standard, HO and VHO lumen packages are IC Rated, approved for dry/damp location unless otherwise noted.

**Fixture Weight:** Maximum fixture weight is 25lbs per 4' fixture.

**Buy American Act Compliant**

**Warranty:** EDGE LED offered with a 5-year limited warranty. Covers LED, driver and fixture.

Specifications and dimensions subject to change without notice. Specification sheets that appear on [pinnacle-ltg.com](http://pinnacle-ltg.com) are the most recent version and supersede all other previously printed or electronic versions.