

\*Shown with SARI2 option



# LiFT LF44DI

## 4x4 Direct/Indirect Suspended Architectural Square with Acoustic Solutions



### Key Features

- Formed and welded extruded aluminum housing for seamless finish with 1/4" trim
- Aluminum top cover conceals all electrical components
- Highly reflective die-formed white painted steel reflector
- Sound Absorption available in specific configurations
- Fabricated lens with 3 lens positions
- LiFT offered with a 5-year limited warranty. Covers LED, driver and fixture
- ETL Listed conforming to UL1598 in US and CSA 250 in Canada
- Maximum fixture weight is 75 lbs
- Room-side maintenance for LED system
- Buy American Act compliant
- Apparent Noise Reduction Coefficient (NRC) is up to 1.7



Example Part #: LF44DI-A-830HO-830-AC448JB-U-PL2-1-0-W



---	---	-----	-----
<b>DIRECT SHIELDING<sup>1</sup></b>	<b>INDIRECT SHIELDING<sup>1</sup></b>	<b>DIRECT SOURCE<sup>2</sup></b>	<b>INDIRECT SOURCE<sup>2</sup></b>
<b>A</b> - Flat Satine Lens <b>AL</b> - Lowered Satine Lens <b>AR</b> - Regress Satine Lens <b>ASF</b> - Acoustic Solution Flush <i>(use P__ to specify color)</i> <b>ASR</b> - Acoustic Solution Regress <i>(use P__ to specify color)</i> <i>Direct Shielding pg. 2</i>	<b>LO</b> - Clear Lens Overlay <b>AS</b> - Acoustic Solution <i>(use __ to specify color)</i> <i>Indirect Shielding pg. 2</i>	<b>_27</b> - 2700K <b>_30</b> - 3000K <b>_35</b> - 3500K <b>_40</b> - 4000K <b>CL</b> - Custom Lumens <b>CW</b> - Custom Watts <b>NA</b> - Not Applicable <i>(for specifying SA fixtures)</i> <i>Direct Source pg. 3</i>	<b>_27</b> - 2700K <b>_30</b> - 3000K <b>_35</b> - 3500K <b>_40</b> - 4000K <b>CL</b> - Custom Lumens <b>CW</b> - Custom Watts <b>NA</b> - Not Applicable <i>(for specifying SA fixtures)</i> <i>Indirect Source pg. 4</i>
<b>MOUNTING<sup>3</sup></b>	<b>VOLTAGE</b>	<b>DRIVER</b>	<b>CIRCUITING</b>
<b>AS4</b> - 4 AC, Straight, JB or ST <b>AC4</b> - 4 AC, Center Mount, JB or ST <b>AH4</b> - 4 AC w/hub, to JB or ST <b>PP</b> - Pendant Pipe to JB or ST <b>PS</b> - Pendant Swivel to JB or ST <i>Mounting pg. 4</i>	<b>U</b> - Universal <i>(120 thru 277V)</i> <b>1</b> - 120V <b>2</b> - 277V <b>NA</b> - Not Applicable <i>(for specifying SA fixtures)</i> <i>Voltage pg. 5</i>	<b>PL2</b> - Advance Xitanium <i>(1%, 0-10v)</i> <b>EE1</b> - eldoLED ECOdrive <i>(1%, 0-10v)</i> <b>ES1</b> - eldoLED SOLDrive <i>(0%, EcoSystem)</i> <b>LH1</b> - Lutron Hi-lume <i>(1%, EcoSystem)</i> <b>OL2</b> - Osram Optotronic <i>(1%, 0-10v)</i> <b>OL4</b> - Osram Optotronic 347v <i>(1%, 0-10v)</i> <b>ND</b> - Non-Dimming <b>NA</b> - Not Applicable <i>(for specifying SA fixtures)</i> <i>Driver pg. 5</i>	<b>1</b> - Single Circuit <b>2</b> - Dual Circuit <b>E</b> - Emergency <i>(entire fixture)</i> <b>N</b> - Night Light <i>(entire fixture)</i> <b>NA</b> - Not Applicable <i>(for specifying SA fixtures)</i> <i>Circuiting pg. 5</i>
<b>BATTERY &amp; EMERGENCY</b>	<b>FINISH</b>	<b>FIXTURE OPTIONS</b>	<b>CONTROLS<sup>4</sup></b>
<b>0</b> - None <b>1P</b> - Philips Bodine 10W <b>1I</b> - Iota 10W <b>1IC</b> - Iota 10W <i>(CEC Listed)</i> <b>NA</b> - Not Applicable <i>(for specifying SA fixtures)</i> <i>Battery &amp; Emergency pg. 5</i>	<b>W</b> - White <b>S</b> - Metallic Silver <b>BL</b> - Textured Black <b>BR</b> - Bronze <b>GR</b> - Graphite <b>CC</b> - Custom Color <i>Finish pg. 5</i>	<b>AM</b> - Antimicrobial Paint <b>GMF</b> - Slow Blow Fusing <b>NA</b> - Not Applicable <i>(for specifying SA fixtures)</i> <i>Fixture Options pg. 5</i>	<b>DLMFC</b> - Wattstopper DLM <i>(wired)</i> <b>ENLI</b> - Enlighted IOT <i>(remote)</i> <b>ENLC</b> - Enlighted Connected Lighting <i>(remote)</i> <b>NA</b> - Not Applicable <i>(for specifying SA fixtures)</i> <i>Controls pg. 6</i>

<sup>1</sup>When specifying Sound Absorption either direct or indirect use NA for the corresponding SOURCE. If specifying an only Sound Absorption fixture you will need to specify NA in the following: DIRECT SOURCE, INDIRECT SOURCE, VOLTAGE, DRIVER, CIRCUITING, BATTERY & EMERGENCY, or CONTROLS. <sup>2</sup>When specifying SOURCE the first \_ is for specifying either 8 - 80CRI, 9 - 90CRI. The ending \_\_ are for specifying output, example HO - High Output. See output charts for more information. <sup>3</sup>Example: AC420JB. AC4 = 4 Aircraft Cables, 120 = 120" long cables, JB = connects to junction box. Standard AC cable lengths are 48" and 120", field adjustable. Standard pendant lengths are 12", 18", or 24". <sup>4</sup>Controls can only be used with Single Circuit (1) or Emergency Circuit (E), cannot be used with any battery options. See Controls chart on page 6 for driver options and more information.

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



## Shielding

- Fabricated, captive lens with 3 lens positions
- Highly reflective white reflectors maintain uniform lens brightness

### Direct Shielding

<b>A or ASF</b> Flush Satine Lens or Acoustic Solution	<b>AL</b> Drop Satine Lens	<b>AR or ASR</b> Regress Satine Lens or Acoustic Solution	<b>Indirect Shielding</b> <b>LO or AS</b> Clear Lens Overlay or Acoustic Solution

### Acoustic Solutions

- 9mm PET Polyester Fiber acoustic panel
- Recyclable and contains up-to 90% post-consumer content
- Use SAFP\_\_ or SARP\_\_ for direct panels, use SAP\_\_ for indirect panels
- Colors below are for representation purposes, color may vary from photograph, contact factory for sample.
- Specify the color of the Sound Absorption with the numeric code below in the Shielding portion of the part number. For example, SAFP04 for Direct Sound Absorption, Flush Mounting, White 04.
- If Acoustic Solutions are specified for the direct portion of the fixture and the indirect portion is non-illuminated, acoustic material will be applied to the indirect side of the fixture.

### Standard Colors

<b>P04</b> - White	<b>P12</b> - Medium Grey	<b>P27</b> - Black	<b>P28</b> - Dark Grey	<b>P33</b> - Royal Blue

### Secondary Colors - May increase lead-time for order. Consult Factory.

<b>P02</b> - Yellow	<b>P03</b> - Orange	<b>P05</b> - Light Tan	<b>P06</b> - Carmel	<b>P10</b> - Silver	<b>P11</b> - Light Grey	<b>P13</b> - Granny Smith
<b>P14</b> - Lime	<b>P16</b> - Dark Blue	<b>P17</b> - Red	<b>P18</b> - Dark Red	<b>P19</b> - Purple	<b>P22</b> - Sky Blue	<b>P23</b> - Deep Blue
<b>P25</b> - Grey	<b>P26</b> - Heathered Grey	<b>P34</b> - Teal	<b>P36</b> - Dark Silver	<b>P37</b> - Blue	<b>PCC</b> - Custom Color	
					Please note there is a minimum order quantity for custom matching. Consult factory for order quantity, price and lead-time.	

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



## Direct Source

- Specify either 80 or 90 CRI
- Longer lead-time may apply for 90 CRI. Consult factory
- 80 CRI = R9≥19 and 90 CRI = R9≥61

## Sound Absorption

**NA** Not applicable (for Sound Absorption fixtures)

## Custom Output- Lumens OR Wattage

**CL** \_\_\_\_\_ Specify CRI, CCT and desired lumens (i.e. CL8352000) *Specify lumens between standard offering listed below. Lumens are specified per color temp*

**CW** \_\_\_\_\_ Specify CRI, CCT and desired wattage (i.e. CW94020) *Specify watts between standard offering listed below*

## 80 CRI

	Color	Lumens	Shielding <b>A, AL, AR</b> Satine Lens	
			Watts	LPW
<b>830LO</b>	3000K	9385	74.5	126
<b>830MO</b>	3000K	15107	126.3	120
<b>830HO</b>	3000K	20672	181.2	114
<b>835LO</b>	3500K	9720	74.6	130
<b>835MO</b>	3500K	15839	126.3	125
<b>835HO</b>	3500K	21958	181.2	121
<b>840LO</b>	4000K	10183	75.0	136
<b>840MO</b>	4000K	16420	127.0	129
<b>840HO</b>	4000K	22612	183.0	124

## 90 CRI

<b>927LO</b>	2700K	7622	74.9	102
<b>927MO</b>	2700K	12287	126.8	97
<b>927HO</b>	2700K	16863	181.9	93
<b>930LO</b>	3000K	8125	74.9	108
<b>930MO</b>	3000K	13119	126.8	103
<b>930HO</b>	3000K	18039	181.9	99
<b>935LO</b>	3500K	8125	74.9	108
<b>935MO</b>	3500K	13119	126.8	103
<b>935HO</b>	3500K	18039	181.9	99
<b>940LO</b>	4000K	8556	74.5	115
<b>940MO</b>	4000K	13778	126.6	109
<b>940HO</b>	4000K	18893	182.3	104



### Indirect Source

- Specify either 80 or 90 CRI
- Longer lead-time may apply for 90 CRI. Consult factory
- 80 CRI = R9≥19 and 90 CRI = R9≥61

### Sound Absorption

**NA** Not applicable (for Sound Absorption fixtures)

### Custom Output- Lumens OR Wattage

**CL** \_\_\_\_\_ Specify CRI, CCT and desired lumens (i.e. CL8352000) *Specify lumens between standard offering listed below. Lumens are specified per color temp*

**CW** \_\_\_\_\_ Specify CRI, CCT and desired wattage (i.e. CW94020) *Specify watts between standard offering listed below*

### 80 CRI

	Color	Lumens	LO Clear Lens Overlay	
			Watts	LPW
<b>830LO</b>	3000K	6483	40.5	160
<b>830MO</b>	3000K	9532	61.8	154
<b>830HO</b>	3000K	12457	83.8	149
<b>835LO</b>	3500K	6752	40.4	167
<b>835MO</b>	3500K	9946	61.7	161
<b>835HO</b>	3500K	13019	83.7	155
<b>840LO</b>	4000K	6937	40.4	172
<b>840MO</b>	4000K	10201	61.7	165
<b>840HO</b>	4000K	13245	83.7	158


### 90 CRI

<b>927LO</b>	2700K	5370	40.5	133
<b>927MO</b>	2700K	7897	61.8	128
<b>927HO</b>	2700K	10253	83.8	122
<b>930LO</b>	3000K	5654	40.5	140
<b>930MO</b>	3000K	8314	61.8	135
<b>930HO</b>	3000K	10795	83.8	129
<b>935LO</b>	3500K	5654	40.5	140
<b>935MO</b>	3500K	8314	61.8	135
<b>935HO</b>	3500K	10795	83.8	129
<b>940LO</b>	4000K	6014	40.5	149
<b>940MO</b>	4000K	8844	61.8	143
<b>940HO</b>	4000K	11483	83.8	137

### Mounting

- Aircraft cables and pendants mount directly to a standard junction box or structure
- Canopies and pendants match fixture finish, power cords are white, grey, or black depending on fixture finish. See Finish section for additional details.
- Must specify overall pendant length of 12", 18" or 24"
- Must specify cable length, either 48" or 120" standard, field adjustable
- Tie off fixture to structure with retention wires
- Maximum fixture weight is 75 lbs

<b>AS4__JB</b> 4 AC cables straight, fixture to J-Box	<b>AC4__JB</b> 4 AC cables, center mount, fixture to J-Box	<b>AH4__JB</b> 4 AC cables with hub, fixture to J-Box	<b>PP__JB</b> Pendant Pipe to J-Box
<b>AS4__ST</b> 4 AC cables straight, fixture to Structure	<b>AC4__ST</b> 4 AC cables, center mount, fixture to Structure	<b>AH4__ST</b> 4 AC cables with hub, fixture to Structure	<b>PS__JB</b> Pendant Swivel to J-Box
			<b>PP__ST</b> Pendant Pipe to Structure
			<b>PS__ST</b> Pendant Swivel to Structure

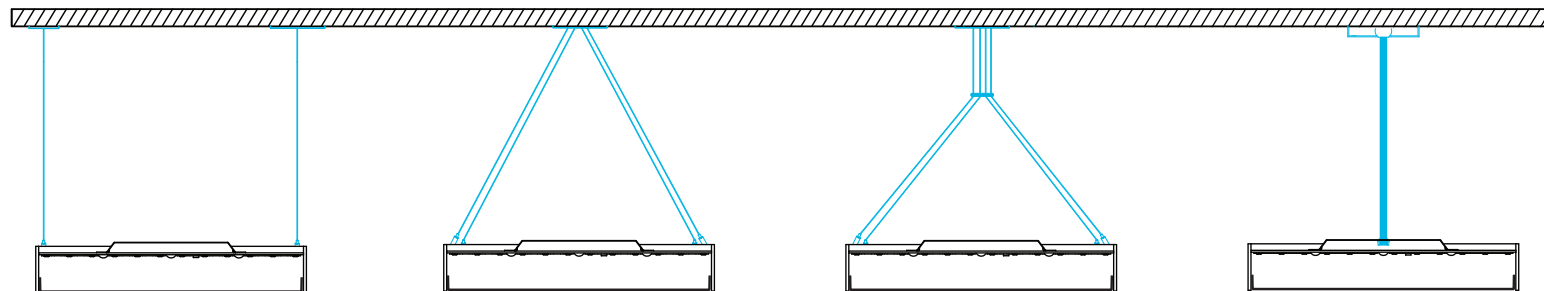

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



## Voltage

- Some LIFT configurations will not accommodate all voltage options; consult with factory

<b>U</b>	Universal
<b>1</b>	120 volt
<b>2</b>	277 volt
<b>3</b>	347 volt
<b>NA</b>	Not Applicable (for Sound Absorption)

## Driver

- Standard Driver Option = PL2
- Driver Lifetime: 50,000 hours at 25°C ambient operating conditions
- For more Driver options, see Pinnacle Resource Guide on download pages at pinnacle-ltg.com
- Some LIFT configurations will not accommodate all driver options; consult with factory

<b>PL2</b>	Advance Xitanium 1%, 0-10v
<b>PS1</b>	Advance Xitanium Step Dimming 50%/100%
<b>EE1</b>	eldoLED ECOdrive 1%, 0-10v Logarithmic
<b>EE2</b>	eldoLED ECOdrive 1%, 0-10v Linear
<b>ES1</b>	eldoLED SOLOdrive 0%, 0-10v Logarithmic
<b>ES2</b>	eldoLED SOLOdrive 0%, 0-10v Linear
<b>LH1</b>	Lutron Hi-lume Soft-on, Fade-to-black 1%, EcoSystem, LDE1
<b>OL2</b>	Osram Optotronic 1%, 0-10v
<b>OL4</b>	Osram Optotronic 347v 1%, 0-10v, requires 347v
<b>ND</b>	Non-Dimming
<b>NA</b>	Not Applicable (for Sound Absorption)

## Circuiting

- Select fixture circuiting from options below
- Some LIFT configurations will not accommodate all circuiting options; consult with factory

<b>1</b>	Single Circuit
<b>2</b>	Dual Circuit
<b>E</b>	Emergency Circuit only (uses nIO EZ PH ER with NLIGHT)
<b>N</b>	Night Light Circuit only
<b>NA</b>	Not Applicable (for Sound Absorption)

## Battery & Emergency

- Select battery or emergency options if required
- Battery duration is 90 minutes
- Test button is integral to fixture
- For more Battery options, see Pinnacle Resource Guide on download pages at pinnacle-ltg.com

<b>0</b>	No Battery
<b>1PB</b>	Philips Bodine 10w Integral
<b>1I</b>	Iota 10w Integral
<b>1IC</b>	Iota 10w Integral, CEC Listed
<b>NA</b>	Not Applicable (for Sound Absorption)

### For Approximate Battery Lumen Output

- Multiply battery wattage X fixture LPW shown on Lumen Table
- 10 (watts) x 92.3 (LPW) = 923 battery lumen output

### Battery & Emergency Ordering Examples

- Single circuit, 10w integral battery Ordering Code: 1-1P
- Emergency circuit only, 10w integral battery Ordering Code: E-1P

## Finish

- Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes
- Selecting a fixture finish other than white may impact lumen output; consult factory for more information

<b>W</b>	White (white cord/white canopy)
<b>S</b>	Metallic Silver (grey cord/silver canopy)
<b>BL</b>	Textured Black (black cord/black canopy)
<b>BR</b>	Bronze (white cord/bronze canopy)
<b>GR</b>	Graphite (white cord/graphite canopy)
<b>CC</b>	Custom Color (white cord/color match canopy)

## Fixture Options

- Additional options to enhance the fixture and finish of the product

<b>AM</b>	Antimicrobial Paint
<b>GMF</b>	Internal Slow Blow Fuse
<b>NA</b>	Not Applicable (for Sound Absorption)

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568

LF44DI\_SUSPENDED\_SPEC\_AUG2021



## Controls

- Pinnacle Lighting offers easy to specify network control solutions that connect to an intelligent centralized system to maximize lighting energy efficiencies or integral sensors for individual fixture control
- Pinnacle Lighting fixtures ship technology ready; commissioning by others
- Controls can only be used with Single Circuit (1) or Emergency Circuit (E)
- Contact factory for any non-standard configurations for layout, placement, or EM options
- One sensor per housing typical, contact factory for more information

	Solution	Components	Network/Sensor	Connection	RQD Drivers	Limitation
<b>DLMFC</b>	Legrand Wattstopper DLM	LMFC-011	Digital Lighting Management (DLM)	Wired, two RJ45 ports	OL2, OL4	None
<b>ENLI</b>	Enlighted IOT	CU-4E	Enlighted, Remote	Enlighted Cable	Any 0-10v	Not available with 347 volt
<b>ENLC</b>	Enlighted Connected Lighting	CU-4E	Enlighted, Remote	Enlighted Cable	Any 0-10v	Not available with 347 volt
<b>NA</b>	Not Applicable (for Sound Absorption)					

## Approvals & Certifications

**Construction:** Formed 20 gauge cold rolled steel housing. Highly reflective die-formed white painted reflector. Wiring access available on top of housing. Lens is removable for room-side maintenance of lens, driver and LED boards.

**Shielding:** Single piece fabricated diffuse acrylic lens creating a fully luminous fixture.

**Acoustic Solutions:** Acoustic Solutions panels may be specified in place of lit fixture components to aid in Acoustic Control within a space. Acoustic Solutions material is a 9mm PET Polyester Fiber acoustic panel, containing up to 90% post-consumer content, made by others. Acoustic testing was completed by Riverbank Acoustic. For specific reports, contact Pinnacle directly.

**Mounting:** Aircraft cable and Pendant mount available. Aircraft Cable and pendant supplied with 5" (127mm) canopies. Refer to installation instructions for appropriate ceiling detail. Maximum fixture weight is 75 lbs.

**LED:** 25°C test environment. Lumen output/wattage has a margin of +/- 5%. All luminaire configurations tested in accordance with IES LM-79. Diodes tested in accordance with IES LM-80. Lifetime calculated using IES TM-21. Minimum lifetime greater than 60,000 hours. L70 = 146,500 hours and L90 = 45,000 hours. MacAdam 3-Step Ellipses. Not all products are Lighting Facts listed. For all available IES files, please visit our website at pinnacle-ltg.com.

**Color & Lumen Output:** Three lumen packages available. Low (LO), Middle (MO) and High (HO). Custom outputs are available. Specify custom lumens or watts between standard offering listed on CRI, CCT & Output page. 80 CRI is available for 3000K, 3500K, and 4000K. 90 CRI is available for 2700K, 3000K, 3500K, and 4000K. 80 CRI = R9≥19 and 90 CRI = R9≥61.

**Voltage:** Universal (U), 120 volt (1), 277 volt (2) and 347 volt (3) options available. Must specify OL4 in Driver section when 347 volt (3) is selected. Some LiFT configurations will not accommodate all voltage options; consult with factory.

**Driver:** Standard Driver Option is Advance 0-10V, 1% = PL2. Electronic driver, Power factor is >0.9 with a THD <20%. Driver Lifetime: 50,000 hours at 25°C ambient operating conditions. For more driver options, see Pinnacle Resource Guide on download pages at pinnacle-ltg.com. Some LiFT configurations will not accommodate all driver options.

**Circuiting:** Select from single circuit (1), dual circuit (2), Emergency circuit (E) or Night Light circuit (N). Some LiFT configurations will not accommodate all circuiting options; consult with factory.

**Battery & Emergency:** Select battery or emergency options if required. If battery or emergency option is not required, enter 0. Battery duration is 90 minutes as standard. Test button is integral to fixture. For more Battery options, see Pinnacle Resource Guide on download pages at pinnacle-ltg.com.

**Finish:** Standard powder-coat textured white, metallic silver, textured black, graphite, or bronze painted finish, consult factory for chip of standard paint finishes. Contact factory for additional custom color and finish options.

**Controls:** DLM utilizes wired network connections for digital control through switching and dimming with 0-10v LED drivers. Enlighted Smart Sensor provides multi-functionality including daylight harvesting and PIR occupancy; for IOT platform using 0-10v LED drivers. Enlighted Smart Sensor provides multi-functionality including daylight harvesting and PIR occupancy; for Connected platform using 0-10v LED drivers.

**Labels:** ETL Listed conforming to UL1598 in US and CSA 250 in Canada. Approved for dry/damp location unless otherwise noted.

**Fixture Weight:** 75 lbs maximum.

**Buy American Act Compliant**

**Warranty:** LiFT LED offered with a 5-year limited warranty. Covers LED, driver and fixture.