




# LUCEN LU22

## 2x2 Architectural Recessed



### Key Features

- Pre-painted formed 22 gauge cold rolled steel housing
- Highly reflective die-formed white painted reflector
- Wiring access available on both ends and top of housing
- LED offered with a 5-year limited warranty. Covers LED, driver and fixture
- UL and cUL Listed, LO, MO, and HO lumen packages are IC Rated
- Pre-painted fixtures are to be used in dry locations only
- For damp location, must specify Paint After Fabrication (PAF) in the Options section of the luminaire specification
- Maximum fixture weight is 15 lbs - Surface Mount Box adds 10 lbs
- Room-Side Maintenance for LED system
- Buy American Act compliant
- Indigo-Clean available, see Indigo-Clean specification sheets for details



Example Part #: LU22-A-830HO-G1-U-OL2-1-0-W

LU22 - SHIELDING - CRI, CCT & OUTPUT - MOUNTING - VOLTAGE - DRIVER - CIRCUITING - BATTERY & EMERGENCY - FINISH - FIXTURE OPTIONS - CONTROLS

---	---	---	---
SHIELDING	SOURCE <a href="#">QS</a> <sup>1</sup>	MOUNTING	VOLTAGE
<b>A</b> - Satine Lens <a href="#">QS</a> <b>W</b> - White Rails <a href="#">QS</a> <b>S</b> - Silver Rails <a href="#">QS</a> <i>Shielding pg. 2</i>	<b>27</b> - 2700K <b>30</b> - 3000K <b>35</b> - 3500K <b>40</b> - 4000K <b>CL</b> - Custom Lumens <b>CW</b> - Custom Watts <b>MOD</b> - Mod options available <i>Lumen Output pg. 2</i>	<b>G1</b> - 15/16" Grid <a href="#">QS</a> <b>G9</b> - 9/16" Grid <a href="#">QS</a> <b>GS</b> - Screw Slot Grid <a href="#">QS</a> <b>FL</b> - Flanged <b>S</b> - Surface Mount <i>Mounting pg. 3</i>	<b>U</b> - Universal (120 thru 277V) <a href="#">QS</a> <b>1</b> - 120V <a href="#">QS</a> <b>2</b> - 277V <a href="#">QS</a> <b>3</b> - 347V <a href="#">QS</a> <i>Voltage pg. 3</i>

---	---	---	---
DRIVER	CIRCUITING	BATTERY & EMERGENCY	FINISH
<b>FSD</b> - Factory Select Driver (1%, 0-10V) <a href="#">QS</a> <b>PL2</b> - Advance Xitanium (1%, 0-10V) <a href="#">QS</a> <b>OL4</b> - Osram 347V (1%, 0-10V) <b>EE1</b> - eldoLED ECODErive (1%, 0-10V) <b>ES1</b> - eldoLED ECODErive (1%, 0-10V) <b>LH1</b> - Lutron Hi-lume (1%, EcoSystem) <a href="#">QS</a> <b>PR1</b> - Advance Xitanium SR <b>OL2</b> - Osram (1%, 0-10V) <a href="#">QS</a> <b>MOD</b> - Mod options available <i>Driver pg. 4</i>	<b>1</b> - Single Circuit <a href="#">QS</a> <b>E</b> - Emergency (entire fixture) <a href="#">QS</a> <b>N</b> - Night Light (entire fixture) <a href="#">QS</a> <i>Circuiting pg. 4</i>	<b>0</b> - None <a href="#">QS</a> <b>1P</b> - Bodine 10W <a href="#">QS</a> <b>1IC</b> - Iota 10W, CEC Listed <a href="#">QS</a> <b>1G</b> - Bodine GTD <b>FSG</b> - Factory Select ALCR <b>GI</b> - Iota ETS DR <b>GB</b> - Bodine GTD <i>Battery and Emergency pg. 4</i>	<b>W</b> - White <a href="#">QS</a> <b>MOD</b> - Mod options available <i>Finish pg. 5</i>

---	---
FIXTURE OPTIONS <sup>2</sup>	CONTROLS <sup>3</sup>
<b>QS</b> - QuickShip <a href="#">QS</a> <b>TW</b> - Through-wiring <b>CP</b> - Chicago Plenum <a href="#">QS</a> <b>AM</b> - Antimicrobial Paint <b>FW6</b> - 6' Flex Whip <a href="#">QS</a> <b>GLR</b> - Fast Blow Fusing <a href="#">QS</a> <b>GMF</b> - Slow Blow Fusing <b>PAF</b> - Paint after fabrication <b>MOD</b> - Mod options available <i>Fixture Options pg. 5</i>	<b>DLMFC</b> - Wattstopper DLM (wired) <b>DLMFS</b> - Wattstopper LLC (wireless) <b>EASYS</b> - Philips EasySense (wireless) <b>SNSLM</b> - Encelium Sensillum (wireless) <b>WVLX</b> - Eaton WaveLinX (wireless) <b>VDO</b> - Lutron Vive Sensor (wireless) <b>VRF</b> - Lutron Vive Connected (wireless) <b>ENL</b> - Enlighted, "C" Connected Lighting or "I" IOT <b>ENL2</b> - Enlighted 2-Wire, "C" Connected Lighting or "I" IOT <b>MOD</b> - Mod options available <i>Controls pg. 6</i>

When specifying SOURCE the first \_ is for specifying either 8 - 80CRI, 9 - 90CRI or B - BIOS. The ending \_ are for specifying output, example HO - High Output. When specifying BIOS use B and then specify color temperature, either 3500K or 4000K, and output, example B35HO - BIOS 3500K High Output. If specifying QS output is 80 CRI, all color temperatures, all lumen packages. Does not include BIOS or Tunable White. See output charts for more information. BIOS dynamic available, please contact factory for more information

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



## Shielding

- Single piece extruded diffuse lens with convex wings and articulated center spine
- Fully luminous housing with optimal glare control
- Highly reflective white reflectors maintain uniform lens brightness

### Ordering Code

A	W	S
Satine Lens	Satine Lens with White Trim	Satine Lens with Silver Trim
		

## Output

- Specify either 80 or 90 CRI
- Longer lead-time may apply for 90 CRI. Consult factory.
- 80 CRI = R9≥19 and 90 CRI = R9≥61
- Not all products qualify for DLC listing. For a complete listing of the EV3D products that qualify for DLC, please go to the DLC website.

### Custom Output - Lumens OR Wattage

CL_____	Specify CRI, CCT and desired lumens (i.e. CL8351200)	Specify lumens between standard offering listed below. Lumens are specified per color temp
CW_____	Specify CRI, CCT and desired wattage (i.e. CW94015)	Specify watts between standard offering listed below

### 80 CRI

	Color	Output	Watts	Shielding		W		S	
				A Satine Lens		White Trim		Silver Trim	
				Lumens	LPW	Lumens	LPW	Lumens	LPW
830LO	3000K	Low	19.6	2132	108.8	1923	98.1	1814	92.6
830MO	3000K	Middle	30.8	3322	107.9	2996	97.3	2827	91.8
830HO	3000K	High	42.1	4287	101.8	3867	91.9	3648	86.7
835LO	3500K	Low	19.6	2191	111.8	1976	100.8	1865	95.1
835MO	3500K	Middle	30.8	3414	110.8	3079	100.0	2905	94.3
835HO	3500K	High	42.1	4406	104.7	3974	94.4	3750	89.1
840LO	4000K	Low	19.6	2286	116.6	2062	105.2	1945	99.3
840MO	4000K	Middle	30.8	3566	115.8	3217	104.4	3035	98.5
840HO	4000K	High	42.1	4627	109.9	4174	99.1	3938	93.5

### 90 CRI

927LO	2700K	Low	19.6	1777	90.7	1603	81.8	1512	77.2
927MO	2700K	Middle	30.8	2769	89.9	2497	81.1	2356	76.5
927HO	2700K	High	42.1	3573	84.9	3223	76.6	3041	72.2
930LO	3000K	Low	19.6	1964	100.2	1772	90.4	1671	85.3
930MO	3000K	Middle	30.8	3060	99.4	2760	89.6	2604	84.5
930HO	3000K	High	42.1	3949	93.8	3562	84.6	3361	79.8
935LO	3500K	Low	19.6	1970	100.5	1777	90.7	1676	85.5
935MO	3500K	Middle	30.8	3070	99.7	2769	89.9	2613	84.8
935HO	3500K	High	42.1	3961	94.1	3573	84.9	3371	80.1
940LO	4000K	Low	19.6	2040	104.1	1840	93.9	1736	88.6
940MO	4000K	Middle	30.8	3181	103.3	2869	93.2	2707	87.9
940HO	4000K	High	42.1	4128	98.1	3723	88.4	3513	83.4



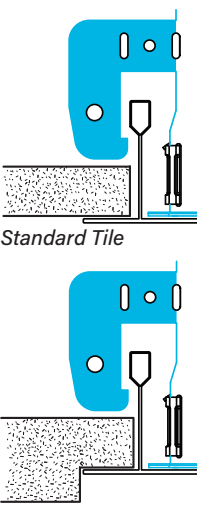
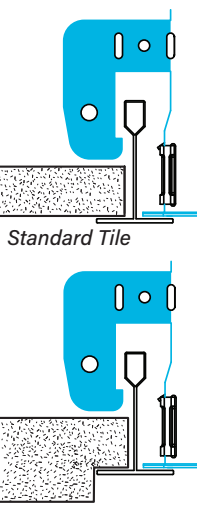


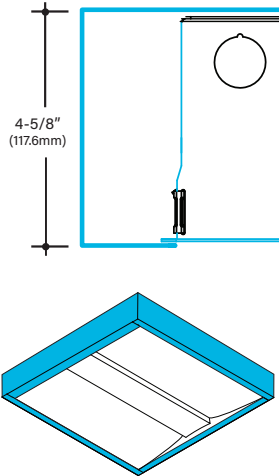
## Direct Source: MOD Options

- Specify **MOD** in the part number for any of the below options
- All RGB\_Source Options will require specific driver and control
- Consult factory for **MOD** specification details, pricing, and lead-time information

MOD		Required Driver	Required Control
	Color Changing RGB LED	EC2	DMX
	Color Changing RGB-W LED	EC2	DMX
	2 Channel Tunable White		
	Dynamic BIOS		

## Mounting

- LUCEN is offered with a universal flange for all grid types. See below for fixture placement in relation to the tile for each grid type
- Grid retention clips integral to housing and require mechanical attachment
- Tie off fixture to structure with retention wires
- Refer to installation instructions during installation at the jobsite
- Approved for dry/damp location when PAF is specified
- Maximum fixture weight is 15lbs - Surface Mount Box adds 10 lbs

G1	G9	GS	FL	S
<b>1" Grid Mount</b> <i>Works with 15/16" grid ceiling types. See profile for fixture position in relation to ceiling grid and tile.</i>	<b>9/16" Grid Mount</b> <i>Works with 9/16" grid ceiling type. For tegular tile installations, fixture position will not be flush to the bottom of the tile. See tegular tile profile image below.</i>	<b>Screw Slot Mounting</b> <i>Works with screw slot and bolt slot grid ceiling types.</i>	<b>Flange Kit</b> <i>A separate flange kit is supplied for installations into inaccessible or drywall applications. Flange kit ships from factory uninstalled separately from fixture.</i>	<b>Surface Mount</b> <i>Utilize for hard lid ceiling applications. The 20 gauge steel frame easily secures to ceiling. Surface Mount Box adds 10 lbs</i>
 <p>Standard Tile</p> <p>Tegular Tile</p>	 <p>Standard Tile</p> <p>Tegular Tile</p>	 <p>Tegular Tile</p>		 <p>4-5/8" (117.6mm)</p>

## Voltage

- Some LUCEN configurations will not accommodate all voltage options; consult with factory

<b>U</b>	Universal
<b>1</b>	120 volt
<b>2</b>	277 volt
<b>3</b>	347 volt



## Driver

- Standard Driver Option = FSD
- Driver Lifetime: 50,000 hours at 25°C ambient operating conditions
- For more Driver options, see Pinnacle Resource Guide
- Some LUCEN configurations will not accommodate all driver options; consult with factory

### 0-10V Drivers

<b>FSD</b>	Factory Select Driver 1%, 0-10v
<b>PL2</b>	Advance Xitanium 1%, 0-10v
<b>PL4</b>	Advance Xitanium 347v 1%, 0-10v, requires 347v
<b>OL2</b>	Osram Optotronic, 1%, 0-10v
<b>OL4</b>	Osram Optotronic 347v, 1% 0-10v (requires 347v)
<b>EE1</b>	eldoLED ECOdrive 1%, 0-10v Logarithmic
<b>EE2</b>	eldoLED ECOdrive 1%, 0-10v Linear
<b>ES1</b>	eldoLED SOLOdrive 0-10v, 0% Logarithmic
<b>ES2</b>	eldoLED SOLOdrive 0-10v, 0% Linear
<b>OL5</b>	Osram Optotronic 1%, 0-10v, AUX

### DALI Drivers

<b>OD1</b>	Osram Optotronic 1%, DEXAL
<b>EE3</b>	eldoLED SOLOdrive .1%, DALI (logarithmic)
<b>EE4</b>	eldoLED SOLOdrive .1%, DALI (linear)
<b>OD2</b>	Osram Optotronic 1%, DALI 2 Channel

### Lutron Drivers

<b>LH1</b>	Lutron Hi-lume Soft-on, Fade-to-black 1%, EcoSystem, LDE1
------------	---

### Alternate Drivers

<b>PS1</b>	Signify Advance Xitanium Step Dimming 50%/100%
<b>PR1</b>	Philips Advance Xitanium SR, requires EASYS, VDO or VRF
<b>EH1</b>	ELV 120v only, 0-10v universal
<b>OD1</b>	Osram Optotronic 1%, DEXAL

## Driver: MOD Options

- Specify **MOD** in the part number for any of the below options
- Consult factory for **MOD** specification details, pricing, and lead-time information

<b>MOD</b>	Power Over Ethernet
------------	---------------------

## Circuiting

- Select fixture circuiting from options below
- Some LUCEN configurations will not accommodate all circuiting options; consult with factory

<b>1</b>	Single Circuit
<b>E</b>	Emergency Circuit only (uses nIO EZ PH ER with NLIGHT)
<b>N</b>	Night Light Circuit only

## Battery & Emergency

- Select battery or emergency options if required
- Battery duration is 90 minutes
- Test button is integral to fixture
- For more Battery options, see Pinnacle Resource Guide

<b>0</b>	No Battery
<b>1IC</b>	Iota 10w Integral
<b>1ILL</b>	Iota 10w Integral Lithium, Self Testing
<b>1IRH</b>	Iota 20w Remote
<b>1P</b>	Bodine 10w Integral
<b>1PLL</b>	Bodine 10w Integral Lithium, Self testing
<b>1PRH</b>	Bodine 20w Remote
<b>FSG</b>	Factory Select Automatic Load Control Relay (ALCR)
<b>GI</b>	Emergency Transfer Switch (ETS) DR Emergency Control Device
<b>GB</b>	Bodine GTD, Generator Transfer Device



Finish

- Powder-coat white painted finish on exposed trim

**W** White

Finish: MOD Options

- Specify **MOD** in the part number for any of the below options
- Consult factory for **MOD** specification details, pricing, and lead-time information

<b>MOD</b>	Wood Grain
	Acoustic
	Metallic Silver
	Textured Black
	Bronze
	Graphite
	Custom Color

Fixture Options

- Additional options to enhance the fixture and finish of the product

<b>QS</b>	10 Day Quick Ship
<b>TW</b>	Through-Wiring
<b>CP</b>	Chicago Plenum
<b>AM</b>	Antimicrobial Paint
<b>FW6</b>	Flex Whip 6'
<b>GLR</b>	Internal Fast Blow Fuse
<b>GMF</b>	Internal Slow Blow Fuse
<b>PAF</b>	Paint after fabrication

Fixture Options: MOD Options

- Specify **MOD** in the part number for any of the below options
- Consult factory for **MOD** specification details, pricing, and lead-time information

	Description
<b>MOD</b>	Remote Driver
	End Power Feed

Quick Ship

Shielding	Output	Mounting	Voltage	Driver	Circuiting	Battery	Finish	Options
10-Day								
<b>A</b> Satine Lens <b>W</b> White Rails <b>S</b> Silver Rails	80 CRI, All color temperatures, all lumen packages <i>See pg 4</i>	<b>G1</b> 1" Grid <b>G9</b> 9/16" Grid <b>GS</b> Screw Slot	<b>U</b> Universal <b>1</b> 120v <b>2</b> 277v	<b>FSD</b> Factory Select Driver (1%, 0-10v) <b>PL2</b> Advance Xitanium 0-10v, 1% <b>LH1</b> Lutron LDE1 <b>OL2</b> Osram 0-10v, 1%	<b>1</b> Single <b>E</b> Emergency <b>N</b> Night Light	<b>1P</b> Bodine 10w <b>1IC</b> Integral Iota 10w Integral	<b>W</b> White	<b>CP</b> Chicago Plenum <b>FW6</b> Flex Whip 6' 18-gauge <b>GLR</b> Internal Fast-Blow Fuse

Consult Factory for projects that are larger than 200 units.



## Controls

- Pinnacle Lighting offers easy to specify network control solutions that connect to an intelligent centralized system to maximize lighting energy efficiencies or integral sensors for individual fixture control
- Pinnacle Lighting fixtures ship technology ready; commissioning by others
- Controls can only be used with Single Circuit (1) or Emergency Circuit (E)
- Contact factory for any non-standard configurations for layout, placement, or EM options
- Controls only compatible with Satine Lens.
- Must specify required driver in Driver Section

	Solution	Components	Network/Sensor	Connection	Required Drivers	Limitations
<b>DLMFC</b>	Legrand Wattstopper DLM	LMFC-011	Digital Lighting Management (DLM)	Wired, two RJ45 ports	OL2, OL4	Not available with Battery
<b>DLMFS</b>	Legrand Wattstopper LLC	LMFS-601-W / LMFI-111	Wireless DLM Fixture Sensor	Wireless	OD1, PR1 or 0-10v	0-10v requires interface
<b>EASYS</b>	Philips EasySense	SNS-210	Daylight/PIR Occupancy	Wireless to switches	PR1	Not available with 347 volt
<b>NSLM</b>	Encelium Sensilum	EN-CLM-PIR-DD-ZB	Encelium, Daylight/PIR Occupancy	Wireless	OD1, OL5	Not available with 347 volt
<b>WLVX</b>	Eaton WaveLinx	SWPD1, MSP3IVMVC1	WaveLinx WCL, Daylight	Wireless	Any 0-10v	Not available with 347 volt
<b>VDO</b>	Lutron Vive Sensor	DFCSJ-OEM-OCC	Vive, Daylight/PIR Occupancy	Wireless	OD1, PR1	Not available with 347 volt
<b>VRF</b>	Lutron Vive Connected	DFCSJ-OEM-RF	Vive	Wireless	OD1, PR1	Not available with 347 volt
<b>ENLI</b>	Enlighted IOT	SU-5E-IOT, CU-4E	Enlighted, Daylight/PIR Occupancy	Wireless	Any 0-10v	Not available with 347 volt
<b>ENLC</b>	Enlighted Connected Lighting	SU-5E-CL, CU-4E	Enlighted, Daylight/PIR Occupancy	Wireless	Any 0-10v	Not available with 347 volt
<b>ENL2I</b>	Enlighted 2-Wire IOT	KIT-SU-5E-D-IOT	Enlighted, Daylight/PIR Occupancy	Wireless	OD1 OR PR1	Not available with 347 volt
<b>ENL2C</b>	Enlighted 2-Wire Connected Lighting	KIT-SU-5E-D-CL	Enlighted, Daylight/PIR Occupancy	Wireless	OD1 OR PR1	Not available with 347 volt

## Controls: MOD Options


- Specify **MOD** in the part number for any of the below options
- Control** Options may require specific driver. Refer to the chart below
- Consult factory for **MOD** specification details, pricing, and lead-time information

		Required Driver
<b>MOD</b>	Encelium Sensilum	OD1, OL5
	Acuity nLight Air Wireless Connected	EE6, ES6

## Photometrics

### Satine Lens

Test #	ITL88919
Catalog #	LU22A-840MO
Lumens	3566 lm
Watts	30.8 W
Efficacy	116 LPW



### Candela Distribution

Vert Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	1329	1329	1329	1329	1329
5	1324	1324	1324	1324	1323
10	1304	1303	1302	1302	1303
15	1271	1269	1266	1263	1264
20	1221	1219	1214	1210	1210
25	1158	1156	1149	1145	1145
30	1084	1080	1074	1072	1073
35	999	994	990	992	996
40	905	902	901	909	916
45	803	803	809	823	832
50	700	702	713	732	743
55	596	600	617	637	648
60	493	500	522	540	550
65	392	403	426	443	453
70	294	309	334	348	357
75	201	219	244	256	266
80	118	136	159	170	178
85	48	63	78	80	84
90	0	0	0	0	0

### Luminance Data (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	3633	3661	3765
55	3325	3442	3615
65	2968	3225	3429
75	2485	3016	3288
85	1762	2863	3084

For all available IES files, please visit our website at [pinnacle-ltg.com](http://pinnacle-ltg.com). Photometry testing in accordance to IESNA-LM-79-08 at an NVLAP accredited testing laboratory. Testing conducted at 25°C ambient conditions

Specifications and dimensions subject to change without notice. Specification sheets that appear on [pinnacle-ltg.com](http://pinnacle-ltg.com) are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | [pinnacle-ltg.com](http://pinnacle-ltg.com) | O: 303-322-5570 F: 303-322-5568

LU22\_LED\_SPEC\_MAY2022



## Approvals & Certifications

**Construction:** Formed 20 gauge cold rolled steel housing. Highly reflective die-formed white painted reflector. Wiring access available on top of housing. Captive and hinged center lens swings open for room-side maintenance of lens, driver and LED boards.

**Shielding:** Co-extruded acrylic lens with ribbed side channels evenly illuminates the side reflector giving the appearance of a fully luminous aperture. Available with standard satine lens or optional clear lens with linear slot or round perf insert.

**Mounting:** Designed to install into acoustical grid and inaccessible ceilings. Specify G1, G9 or GS for acoustical grid ceiling. Specify FL for inaccessible ceilings. Grid retention clips integral to housing and require mechanical attachment. Tie off fixture to structure with retention wires. Maximum fixture weight is 28 lbs

**LED:** 25°C test environment. Lumen output/wattage has a margin of +/- 5%. All luminaire configurations tested in accordance with IES LM-79. Diodes tested in accordance with IES LM-80. Lifetime calculated using IES TM-21. Minimum lifetime greater than 60,000 hours. L70 = 107,300 hours and L90 = 32,000 hours. MacAdam 3-Step Ellipses. Not all products are lighting facts listed. For all available IES files, please visit our website at pinnacle-ltg.com.

**CRI, CCT & Output:** Four lumen packages available. Low (LO), Medium (MO), High (HO) and Very High (VHO). Custom outputs are available. Specify custom lumens or watts between standard offering listed on Color Temperature & Output page. 80 CRI is available for 3000K, 3500K, and 4000K. 90 CRI is available for 2700K, 3000K, 3500K, and 4000K. 80 CRI = R9≥19 and 90 CRI = R9≥61.

**Voltage:** Universal (U), 120 volt (1) and 277 volt (2). Some LUCEN configurations will not accommodate all voltage options; consult with factory.

**Driver:** Standard Driver Option is Advance Xitanium 0-10V, 1% = PL2. Electronic driver, Power factor is >0.9 with a THD <20%. Driver Lifetime: 50,000 hours at 25C ambient operating conditions. Ambient operating range: -20°F/-30°C to 91°F/33°C.

**Circuiting:** Select from single circuit (1), Emergency circuit (E) or Night Light circuit (N). Some LUCEN configurations will not accommodate all circuiting options, consult with factory.

**Battery & Emergency:** Select battery or emergency options if required. If battery or emergency option is not required, enter 0. Battery duration is 90 minutes as standard. Test button is integral to fixture.

**Finish:** Powder-coat white painted finish on exposed trim.

**Controls:** DLM utilizes wired network connections for digital control through switching and dimming. nLight Air rES7 sensor provides wireless control, daylight harvesting and occupancy detection with PIR or PDT using eldoLED LED drivers. nLight Air rIO module provides wireless control using eldoLED LED drivers. EasySense sensor provides daylight harvesting and PIR occupancy detection using the SR LED driver; the Philips app provides advanced configurations. ENCELIUM SensiLUM sensor provides wireless control, daylight harvesting and PIR occupancy; driver data is available when using the DEXAL driver. ENCELIUM SensiLUM sensor provides wireless control, daylight harvesting and PIR occupancy; driver data is available when using the DEXAL driver. WaveLinx Connected Lighting sensor provides wireless control and daylight harvesting using 0-10V LED drivers. Lutron Vive sensor provides wireless control, daylight harvesting and PIR occupancy detection using DEXAL or SR LED drivers. Lutron Vive module provides wireless control using DEXAL or SR LED drivers.

**Labels:** UL and cUL Listed. LO, MO, HO and VHO lumen packages are IC Rated, approved for dry/damp location unless otherwise noted.

**Fixture Weight:** 15 lbs maximum - Surface Mount Box adds 10 lbs.

**Buy American Act Compliant**

**Warranty:** LUCEN LED offered with a 5-year limited warranty. Covers LED, driver and fixture.