



10 DAY
QUICK SHIP →




Sample Part # EV3D-HE-830-24'-G1-U-OL1-T-0-W-QS

QS must be listed at the end of the part number¹

EDGE

EV2D / 3D / 4D

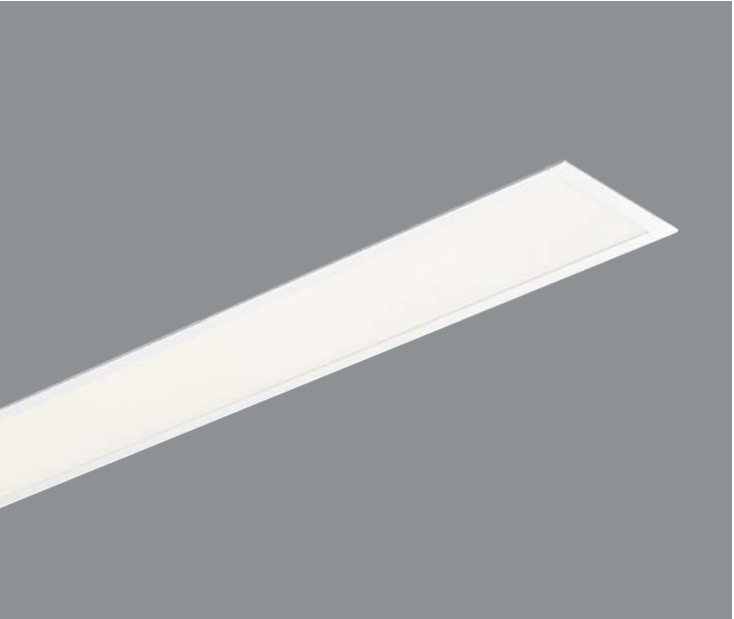

Shielding		CRI, CCT & Output²		Length or Pattern³		Mounting		Voltage		Driver		Circuiting⁴		Battery⁴		Finish		Options	
A	Satine	8 _____	80 CRI only. All color temperatures, all lumen packages listed on spec sheet	_	Individual Fixture	G1(G)	1" T-Bar	U	Universal (120-277)	OL1	Osram 10% / 0-10v, std	1	Single Circuit	0	None	W	White	CP	Chicago Plenum
HE	High			--	Cont. Row (to an 1/8")	G9(G)	9/16" T-Bar	1	120V	OL2	Osram 1% / 0-10v	E	Emergency	IC	Iota 10W Integral			GLR	Internal Fast Blow Fuse
BW	Batwing			L_X_	L-shape	GS(G)	Screw Slot	2	277V	PL2	Philips Xitanium 1% 0-10v	N	Night Light						
WHE	Asymmetric	CL	Custom Lumens	R_X_	Rectangle	FL(F)	1/2" Flange			ND	Non-Dimming								
		CW	Custom Watts	S_	Square	NF(N)	Flangeless												
				U_X_	U-shape	SF(S)	Spackle Flange												
				WC	Wall to ceiling														

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

EVL / EVLS



CRI, CCT & Output²		Length		Mounting		Voltage		Driver		Circuiting⁴		Battery⁴		Finish		Options	
8 _____	80 CRI only. All color temperatures, all lumen packages listed on spec sheet	_	Individual Fixture	G1(G)	1" T-Bar	U	Universal (120-277)	OL1	Osram 10% / 0-10v, std	1	Single Circuit	0	None	W	White	CP	Chicago Plenum
		--	Cont. Row(to the foot)	G9(G)	9/16" T-Bar	1	120V	OL2	Osram 1% / 0-10v	E	Emergency	IC	Iota 10W Integral			GLR	Internal Fast Blow Fuse
CL	Custom Lumens			GS(G)	Screw Slot	2	277V	PL2	Philips Xitanium 1% 0-10v	N	Night Light					EF	End Filler⁵
CW	Custom Watts			FL(F)	1/2" Flange			ND	Non-Dimming								
				NF(N)	Flangeless												
				SF(S)	Spackle Flange												

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

EV3WW



CRI, CCT & Output²		Length		Mounting		Voltage		Driver		Circuiting⁴		Battery⁴		Finish		Options	
8 _____	80 CRI only. All color temperatures, all lumen packages listed on spec sheet	_	Individual Fixture	G1(G)	1" T-Bar	U	Universal (120-277)	OL1	Osram 10% / 0-10v, std	1	Single Circuit	0	None	W	White	CP	Chicago Plenum
		--	Cont. Row(to the foot)	G9(G)	9/16" T-Bar	1	120V	OL2	Osram 1% / 0-10v	E	Emergency	IC	Iota 10W Integral			GLR	Internal Fast Blow Fuse
CL	Custom Lumens			GS(G)	Screw Slot	2	277V	PL2	Philips Xitanium 1% 0-10v	N	Night Light					EF	End Filler⁵
CW	Custom Watts			FL(F)	1/2" Flange			ND	Non-Dimming								
				NF(N)	Flangeless												
				SF(S)	Spackle Flange												


All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

EDGE EX

Sample Part # EX3D-HE-N-830-24'-AC48G1-U-OL1-1-0-W-QS

QS must be listed at the end of the part number¹

EX2D / 3D / 4D
EX2DI / 3DI / 4DI
EX2I / 3I / 4I

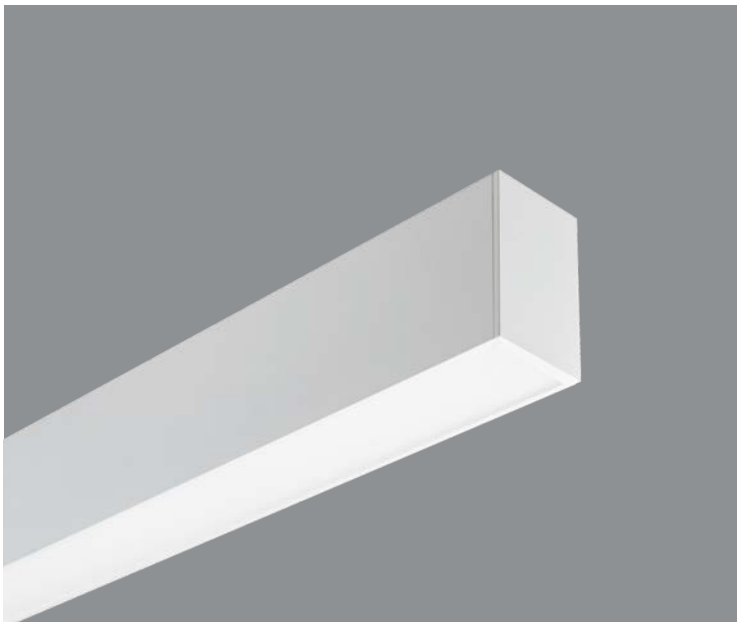

Direct Shielding		CRI, CCT & Output ²		Length or Pattern ³		Mounting		Voltage		Driver		Circuiting ⁴		Battery ⁴		Finish		Options	
V	Satine	8_ _ _ _	80 CRI only. All color temperatures, all lumen packages listed on spec sheet	_	Individual Fixture	(M) C48G_	Grid	U	Universal (120-277)	OL1	Osram 10% / 0-10v, std	1	Single Circuit	0	None	W	White	GLR	Internal Fast Blow Fuse
HE	High Efficiency			_ _	Cont. Row (to the foot)	(M)AC48JB	Junction Box	1	120V	OL2	Osram 1% / 0-10v	E	Emergency	ILL	Iota 10W Integral (EX2, EX3)	S	Silver		
BW	Batwing			L_X_	L-shape	(M)AC48ST	Structure	2	277V	PL2	Philips Xitanium 1% 0-10v	N	Night Light	IC	Iota 10W Integral (EX4)	BL	Textured Black		
WHE	Asymmetric																		
N	None Indirect fixture only			CL	Custom Lumens	S_	Square	S	Surface			ND	Non-Dimming						
		CW	Custom Watts	U_X_	U-shape														
Indirect Shielding																			
HE	High Efficiency																		
BW	Batwing																		
WHE	Asymmetric																		
N	None Direct fixture only																		

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Black QuickShip only available in 4', 6', and 8' individual lengths. Consult factory for larger projects.

EX3WW



Direct Shielding		CRI, CCT & Output ²		Length or Pattern ³		Mounting		Voltage		Driver		Circuiting ⁴		Battery ⁴		Finish		Options									
WW	Wall Wash	8_____	80 CRI only. All color temperatures, all lumen packages listed on spec sheet	_	Individual Fixture	(M)AC48G_	Grid	U	Universal (120-277)	OL1	Osram 10% / 0-10v, std	1	Single Circuit	0	None	W	White	GLR	Internal Fast Blow Fuse								
					--		Cont. Row (to the foot)				(M)AC48JB		Junction Box		1		120V			OL2	Osram 1% / 0-10v	E	Emergency	ILL	Iota 10W Integral	S	Silver
											(M)AC48ST		Structure		2		277V			PL2	Philips Xitanium 1% 0-10v	N	Night Light				
								ND	Non-Dimming																		
				CL	Custom Lumens																						
		CW	Custom Watts																								

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Black QuickShip only available in 4', 6', and 8' individual lengths. Consult factory for larger projects.

TESA

Sample Part # T4A-835VHO-16'-AC48G1-U-OL1-1-0-W-QS

QS must be listed at the end of the part number*



T4A



Shielding

A Satine

CRI, CCT & Output ²

8 80 CRI only. All color temperatures, all lumen packages listed on spec sheet

CL Custom Lumens
CW Custom Watts

Length

— Individual Fixture (4', 8')
-- Cont. Row (in 4' increments)

Mounting

AC48G Grid
AC48JB Junction Box
AC48ST Structure

Voltage

U Universal (120-277)
1 120V
2 277V

Driver

OL1 Osram 10% 0-10v, std
OL2 Osram 1% 0-10v
PL2 Philips Xitanium 1% 0-10v
ND Non-Dimming

Circuiting⁴

1 Single Circuit
E Emergency
N Night Light

Battery⁴

0 None
IR Iota 10W (remote)

Finish

W White

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

COVE

Sample Part # C-830HO-26'-CV-U-OL1-1-0-N-QS

QS must be listed at the end of the part number*

C



CRI, CCT & Output ²		Length		Mounting		Voltage		Driver		Circuiting ⁴		Battery ⁴		Finish	
8	80 CRI only. All color temperatures, all lumen packages listed on spec sheet	—	Individual Fixture (2', 3', 4', 6', 8')	CV	COVE Mounting	U	Universal (120-277)	OL1	Osram 10% 0-10v, std	1	Single Circuit	0	None	N	Natural
						1	120V	OL2	Osram 1% 0-10v	E	Emergency	ILL	Iota 10W Integral (low profile)		
CL	Custom Lumens	—	Cont. Row (in 1' increments)			2	277V	PL2	Philips Xitanium 1% 0-10v	N	Night Light				
CW	Custom Watts														

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

ADEO/LUCEN

Architectural Recessed

Sample Part # AD22-A-830-G1-U-OL1-1-0-W-QS

QS must be listed at the end of the part number¹

¹Quick Ship items must be on their own purchase order. QS must be listed at the end of the part number to qualify for the Quick Ship timeline. Orders submitted without QS at the end of the part number will be entered with a standard lead-time. ² Custom outputs are also included, but they must be between the high and low outputs listed on the Spec Sheets. ³ Maximum of 12 inside corners and 12 horizontal corners per Quick Ship order. ⁴ Submittal drawing required for all Battery Packs, Emergency Circuits, patterns, and continuous row configurations. ⁵ End filler option used for fitting fixture into odd lengths. Filler is non-illuminated. Left and right end filler provided with EF specified. Please consult factory for orders with more than 25 end fillers.

AD22

LU22



Shielding

- V** Satine
- W** White rails (for LUCEN only)
- S** Silver rails (for LUCEN only)

CRI, CCT & Output ²

- 8_** 80 CRI only. All color temperatures, all lumen packages listed on spec sheet
- CL** Custom Lumens
- CW** CustomWatts

Mounting

- G1** 1" T-Bar
- 9/16" T-Bar
- GS** Screw Slot

Voltage

- U** Universal (120-277)
- 1** 120V
- 2** 277V

Driver

- OL1** Osram 10% 0-10v, std
- OL2** Osram 1% 0-10v
- PL2** Philips Xitanium 1% 0-10v
- ND** Non-Dimming

Circuiting ⁴

- 1** Single Circuit
- E** Emergency
- N** Night Light

Battery ⁴

- 0** None
- P** Bodine 10W Integral
- IC** Iota 10W Integral

Finish

- W** White

Options

- CP** Chicago Plenum
- GLR** Internal Fast Blow Fuse
- FW6** 6', 18-gauge, Flex Whip

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

AD24

LU24



Shielding

- V** Satine
- W** White rails (for LUCEN only)
- S** Silver rails (for LUCEN only)

CRI, CCT & Output ²

- 8_** 80 CRI only. All color temperatures, all lumen packages listed on spec sheet
- CL** Custom Lumens
- CW** CustomWatts

Mounting

- G1** 1" T-Bar
- 9/16" T-Bar
- GS** Screw Slot

Voltage

- U** Universal (120-277)
- 1** 120V
- 2** 277V

Driver

- OL1** Osram 10% 0-10v, std
- OL2** Osram 1% 0-10v
- PL2** Philips Xitanium 1% 0-10v
- ND** Non-Dimming

Circuiting ⁴

- 1** Single Circuit
- E** Emergency
- N** Night Light

Battery ⁴

- 0** None
- P** Bodine 10W Integral
- IC** Iota 10W Integral

Finish

- W** White

Options

- CP** Chicago Plenum
- GLR** Internal Fast Blow Fuse
- FW6** 6', 18-gauge, Flex Whip

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

AD14

LU14



Shielding

- V** Satine
- W** White rails (for LUCEN only)
- S** Silver rails (for LUCEN only)

CRI, CCT & Output ²

- 8_** 80 CRI only. All color temperatures, all lumen packages listed on spec sheet
- CL** Custom Lumens
- CW** CustomWatts

Mounting

- G1** 1" T-Bar
- 9/16" T-Bar
- GS** Screw Slot

Voltage

- U** Universal (120-277)
- 1** 120V
- 2** 277V

Driver

- OL1** Osram 10% 0-10v, std
- OL2** Osram 1% 0-10v
- PL2** Philips Xitanium 1% 0-10v
- ND** Non-Dimming

Circuiting ⁴

- 1** Single Circuit
- E** Emergency
- N** Night Light

Battery ⁴

- 0** None
- P** Bodine 10W Integral
- IC** Iota 10W Integral

Finish

- W** White

Options

- CP** Chicago Plenum
- GLR** Internal Fast Blow Fuse
- FW6** 6', 18-gauge, Flex Whip

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.



P I N N A C L E
ARCHITECTURAL LIGHTING®

3801 Havana St. Denver CO, 80239

Phone: 303.322.5570

www.pinnacle-ltg.com

July 2022

© 2020 Pinnacle Architectural
Lighting®

Specifications and dimensions subject to change without notice. Specification sheets and brochures that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

A brand of  **legrand®**