


CONVERJ CJ22

2x2 Architectural Recessed




Key Features

- Formed 20 gauge cold rolled steel housing. Highly reflective die-formed white painted reflector.
- Wiring access available on top of housing
- LED offered with a 5-year limited warranty. Covers LED, driver and fixture
- UL and cUL Listed, LO, MO, and HO lumen packages are IC Rated
- Approved for dry/damp location unless otherwise noted
- Maximum fixture weight is 22 lbs - Surface Mount Box adds 10 lbs
- Room-Side Maintenance for LED system
- Buy American Act compliant



Example Part #: CJ22-A-830HO-G1-U-OL2-1-0-W



SHIELDING	CRI, CCT & OUTPUT	MOUNTING	VOLTAGE
A - Satine Lens R - Round Perf L - Linear Perf <i>Shielding pg. 2</i>	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K CL - Custom Lumens CW - Custom Watts <i>Lumen Output pg. 2</i> Example: 830HO is 8 = 80 CRI; 30 = 3000K; HO = High Output	G1 - 15/16" Grid G9 - 9/16" Grid GS - Screw Slot Grid FL - Flanged S - Surface Mount <i>Mounting pg. 3</i>	U - Universal (120 thru 277V) 1 - 120V 2 - 277V 3 - 347V <i>Voltage pg. 3</i>
DRIVER	CIRCUITING	BATTERY & EMERGENCY	FINISH
FSD - Factory Select Driver (1%, 0-10v) PL2 - Advance Xitanium (1%, 0-10v) OL4 - Osram 347V (1%, 0-10v) EE1 - eldoLED ECOdrive (1%, 0-10v) ES1 - eldoLED SOLOdrive (0%, 0-10v) LH1 - Lutron Hi-lume (1%, EcoSystem) PS1 - Advance Xitanium (50%/100%) OL2 - Osram (1%, 0-10v) <i>Driver pg. 3</i>	1 - Single Circuit E - Emergency (entire fixture) N - Night Light (entire fixture) <i>Circuiting pg. 4</i>	0 - None FSG - Factory Select ALCR GI - Iota ETS DR GB - Bodine GTD 1P - Bodine 10W 1IC - Iota 10W, CEC Listed 1G - Bodine GTD <i>Battery and Emergency pg. 4</i>	W - White <i>Finish pg. 4</i>
FIXTURE OPTIONS	CONTROLS		
TW - Through-wiring CP - Chicago Plenum AM - Antimicrobial Paint AR - Air Return DSP - Customer Supplied Battery/Driver/Sensor FW6 - 6' Flex Whip <i>Fixture Options pg. 5</i>	Pinnacle is able to accommodate different control solutions from different manufacturers. Consult Factory for more information.		

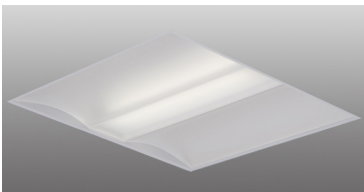
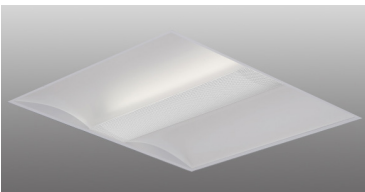
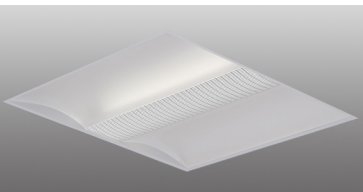

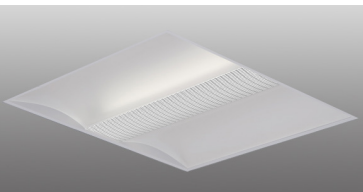
Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



Shielding

- Unique twin-arched wings and articulated center spine
- Utilizes a proprietary layered lens creating a fully luminous housing with optimal glare control
- Highly reflective white reflectors maintain uniform lens brightness
- Wiring access available on both side and top of housing

Ordering Code

A	R	L
Satine Lens	Round Perf	Linear Perf
	 	 

Output

- Specify either 80 or 90 CRI
- Longer lead-time may apply for 90 CRI. Consult factory
- 80 CRI = R9≥19 and 90 CRI = R9≥61

Custom Output - Lumens OR Wattage

CL _____	Specify CRI, CCT and desired lumens (i.e. CL8351200)	Specify lumens between standard offering listed below. Lumens are specified per color temp
CW _____	Specify CRI, CCT and desired wattage (i.e. CW94015)	Specify watts between standard offering listed below

80 CRI

	Color	Output	Watts	Shielding	
				A Satine Lens	
				Lumens	LPW
830LO	3000K	Low	23.0	2096	91.1
830MO	3000K	Middle	36.4	3215	88.3
830HO	3000K	High	49.2	4123	83.8
835LO	3500K	Low	23.0	2161	94.0
835MO	3500K	Middle	36.4	3314	91.0
835HO	3500K	High	49.2	4250	86.4
840LO	4000K	Low	23.0	2211	96.1
840MO	4000K	Middle	36.4	3390	93.1
840HO	4000K	High	49.2	4348	88.4

90 CRI

927LO	2700K	Low	23.0	1660	72.2
927MO	2700K	Middle	36.4	2545	69.9
927HO	2700K	High	49.2	3264	66.3
930LO	3000K	Low	23.0	1931	84.0
930MO	3000K	Middle	36.4	2962	81.4
930HO	3000K	High	49.2	3798	77.2
935LO	3500K	Low	23.0	1943	84.5
935MO	3500K	Middle	36.4	2980	81.9
935HO	3500K	High	49.2	3821	77.7
940LO	4000K	Low	23.0	1973	85.8
940MO	4000K	Middle	36.4	3024	83.1
940HO	4000K	High	49.2	3879	78.8

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

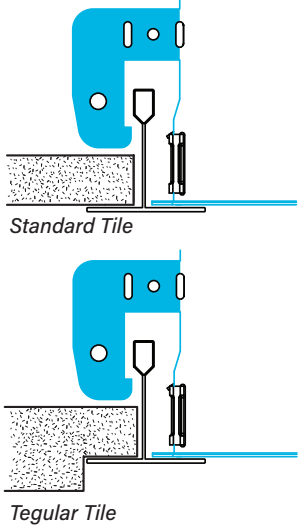
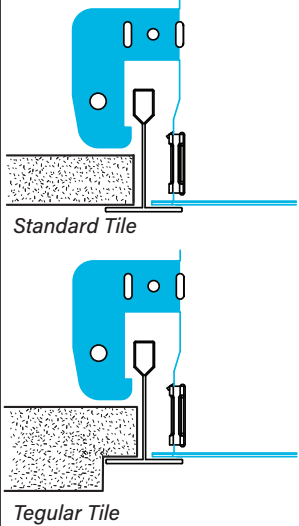
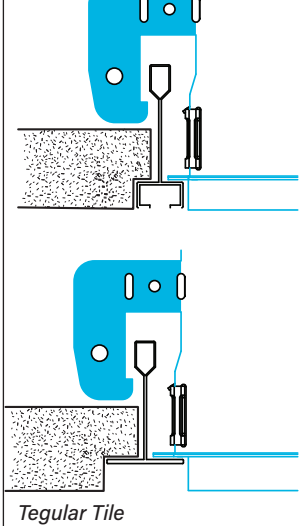
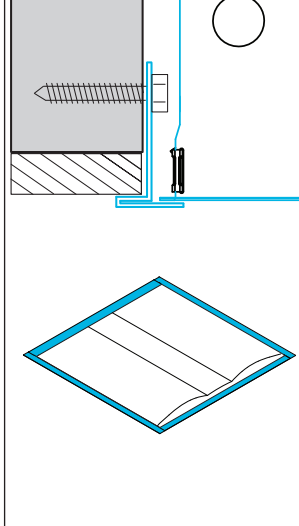
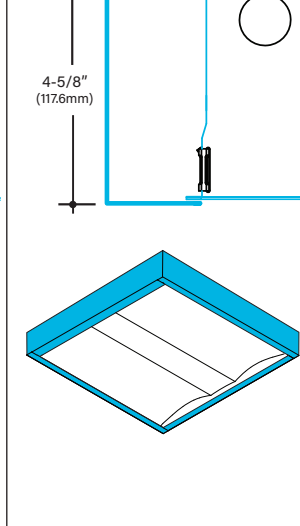
Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568

CJ22_LED_SPEC_JUNE2022



Mounting

- Designed to install into acoustical grid and inaccessible ceilings
- Grid retention clips integral to housing and require mechanical attachment
- Tie off fixture to structure with retention wires
- Maximum fixture weight is 22 lbs - Surface Mount Box adds 10 lbs
- Refer to installation instructions during installation at the job site
- Approved for dry/damp location unless otherwise noted

G1	G9	GS	FL	S
<p>1" Grid Mount Works with 15/16" grid ceiling types. See profile for fixture position in relation to ceiling grid and tile.</p>  <p><i>Standard Tile</i></p> <p><i>Tegular Tile</i></p>	<p>9/16" Grid Mount Works with 9/16" grid ceiling type. For tegular tile installations, fixture position will not be flush to the bottom of the tile. See tegular tile profile image below.</p>  <p><i>Standard Tile</i></p> <p><i>Tegular Tile</i></p>	<p>Screw Slot Mounting Works with screw slot, bolt slot and 9/16" grid ceiling types. For 9/16" installations with tegular tile, fixture position will be flush to the bottom of the tile. Consult factory for detailed installation instructions.</p>  <p><i>Standard Tile</i></p> <p><i>Tegular Tile</i></p>	<p>Flange Kit A separate flange kit is supplied for installations into inaccessible or drywall applications. Flange kit ships from factory uninstalled separately from fixture. Consult factory for detailed installation instructions.</p> 	<p>Surface Mount Utilize for hard lid ceiling applications. The 20 gauge steel frame easily secures to ceiling. Surface Mount Box adds 10 lbs.</p>  <p>4-5/8" (117.6mm)</p>

Voltage

- Some CONVERJ configurations will not accommodate all voltage options; consult with factory

U	Universal
1	120 volt
2	277 volt
3	347 volt



Driver

- Standard Driver Option = FSD
- Driver Lifetime: 50,000 hours at 25°C ambient operating conditions
- For more Driver options, see Pinnacle Resource Guide
- Some CONVERJ configurations will not accommodate all driver options; consult with factory

0-10V Drivers

FSD	Factory Select Driver 1%, 0-10v
PL2	Advance Xitanium 1%, 0-10v
PL4	Advance Xitanium 347v 1%, 0-10v, requires 347v
OL2	Osram Optotronic, 1%, 0-10v
OL4	Osram Optotronic 347v, 1% 0-10v (requires 347v)
EE1	eldoLED ECOdrive 1%, 0-10v Logarithmic
EE2	eldoLED ECOdrive 1%, 0-10v Linear
ES1	eldoLED SOLOdrive 0-10v, 0% Logarithmic
ES2	eldoLED SOLOdrive 0-10v, 0% Linear
OL5	Osram Optotronic 1%, 0-10v, AUX

DALI Drivers

OD1	Osram Optotronic 1%, DEXAL
EE3	eldoLED SOLOdrive .1%, DALI (logarithmic)
EE4	eldoLED SOLOdrive .1%, DALI (linear)
OD2	Osram Optotronic 1%, DALI 2 Channel

Lutron Drivers

LH1	Lutron Hi-lume Soft-on, Fade-to-black 1%, EcoSystem, LDE1
------------	---

Alternate Drivers

PS1	Signify Advance Xitanium Step Dimming 50%/100%
PR1	Philips Advance Xitanium SR, requires EASYS, VDO or VRF
EH1	ELV 120v only, 0-10v universal
OD1	Osram Optotronic 1%, DEXAL

Circuiting

- Select fixture circuiting from options below
- Some CONVERJ configurations will not accommodate all circuiting options; consult with factory

1	Single Circuit
E	Emergency Circuit only
N	Night Light Circuit only

Battery & Emergency

- Select battery or emergency options if required
- Battery duration is 90 minutes
- Test button is integral to fixture
- For more Battery options, see Pinnacle Resource Guide

0	No Battery
1IC	lota 10w Integral
1ILL	lota 10w Integral Lithium, Self Testing
1IRH	lota 20w Remote
1P	Bodine 10w Integral
1PLL	Bodine 10w Integral Lithium, Self Testing
1PRH	Bodine 20w Remote
FSG	Factory Select Automatic Load Control Relay (ALCR)
GI	Emergency Transfer Switch (ETS) DR Emergency Control Device
GB	Bodine GTD, Generator Transfer Device

For Approximate Battery Lumen Output

- Multiply battery wattage X fixture LPW shown on Lumen Table
- 10 (watts) x 92.3 (LPW) = 923 battery lumen output

Battery & Emergency Ordering Examples

- Single circuit, 10w integral battery Ordering Code: 1-1P
- Emergency circuit only, 10w integral battery Ordering Code: E-1P

Finish

- Powder-coat white painted finish on exposed trim

W	White
----------	-------



Fixture Options

- Additional options to enhance the fixture and finish of the product

TW	Through-Wiring
CP	Chicago Plenum
AM	Antimicrobial Paint
AR	Air Return
DSP	Customer Supplied Battery/Driver/Sensor
FW6	Flex Whip 6'


Controls

- Pinnacle is able to accommodate different control solutions from different manufacturers. Consult Factory for more information.

Photometrics

Satine Lens

Test #	ITL85411
Catalog #	CJ22A-840MO
Lumens	3390 Lm
Watts	36.4 W
Efficacy	93 LPW



Candela Distribution

Vert Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	1242	1242	1242	1242	1242
5	1238	1238	1238	1239	1239
10	1221	1222	1221	1222	1224
15	1195	1194	1197	1201	1202
20	1153	1154	1160	1166	1167
25	1103	1104	1113	1119	1122
30	1041	1044	1055	1062	1067
35	971	975	986	995	999
40	892	895	907	917	923
45	804	807	818	827	833
50	711	713	719	728	732
55	611	610	614	617	620
60	504	501	500	497	499
65	395	390	384	380	382
70	285	278	272	275	279
75	182	178	178	187	192
80	97	96	104	114	121
85	35	38	45	48	49
90	0	0	0	0	0

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	3618	3682	3747
55	3388	3405	3439
65	2973	2888	2873
75	2238	2188	2364
85	1270	1643	1792



Approvals & Certifications

Construction: Formed 20 gauge cold rolled steel housing. Highly reflective die-formed reflectors maintain uniform lens brightness. Wiring access on both sides and top of housing. Housing designed to maintain optimal temperature of LED diodes and driver. Captive one-piece door frame swings open for room-side maintenance of lens, driver and LED boards.

Shielding: Single piece co-extruded unique twin-arched wings and articulated center spine. Utilizes a proprietary layered lens creating a fully luminous housing with optimal glare control. Available with standard satine lens.

Mounting: Designed to install into acoustical grid and inaccessible ceilings. Specify G1, G9 or GS for acoustical grid ceiling. Specify FL for inaccessible ceilings. Grid retention clips integral to housing and require mechanical attachment. Tie off fixture to structure with retention wires. Maximum fixture weight is 22 lbs Surface Mount Box adds 10 lbs.

LED: 25°C test environment. Lumen output/wattage has a margin of +/- 5%. All luminaire configurations tested in accordance with IES LM-79. Diodes tested in accordance with IES LM-80. Lifetime calculated using IES TM-21. Minimum lifetime greater than 60,000 hours. L70 = 107,300 hours and L90 = 32,000 hours. MacAdam 3-Step Ellipses. Not all products are lighting facts listed. For all available IES files, please visit our website at pinnacle-ltg.com.

CRI, CCT & Output: Three lumen packages available. Low (LO), Medium (MO) and High (HO). Custom outputs are available. Specify custom lumens or watts between standard offering listed on CRI, CCT & Output page. 80 CRI is available for 3000K, 3500K, and 4000K. 90 CRI is available for 2700K, 3000K, 3500K, and 4000K. 80 CRI = R9≥19 and 90 CRI = R9≥61.

Voltage: Universal (U), 120 volt (1), 277 volt (2) and 347 volt (3) options available. Must specify OL4 in Driver section when 347 volt (3) is selected. Some CONVERJ configurations will not accommodate all voltage options; consult with factory.

Driver: Standard Driver Option is Advance Xitanium 0-10V, 1% = PL2. Electronic driver, Power factor is >0.9 with a THD <20%. Driver Lifetime: 50,000 hours at 25°C ambient operating conditions. Ambient operating range: -20°F/-30°C to 91°F/33°C. For more driver options, see Pinnacle Resource Guide. Some CONVERJ configurations will not accommodate all driver options.

Circuiting: Select from single circuit (1), Emergency circuit (E) or Night Light circuit (N). Some CONVERJ configurations will not accommodate all circuiting options, consult with factory.

Battery & Emergency: Select battery or emergency options if required. If battery or emergency option is not required, enter 0. Battery duration is 90 minutes as standard. Test button is integral to fixture. For more Battery options, see Pinnacle Resource Guide.

Finish: Powder-coat white painted finish on exposed trim.

Controls: Pinnacle is able to accommodate different control solutions from different manufacturers. Consult Factory for more information.

Labels: UL and cUL Listed. LO, MO, and HO lumen packages are IC Rated, approved for dry/damp location unless otherwise noted.

Fixture Weight: 22 lbs maximum - Surface Mount Box adds 10 lbs.

Buy American Act Compliant

Warranty: CONVERJ LED offered with a 5-year limited warranty. Covers LED, driver and fixture.