

# EDGE EX4DI

## 4" Suspended Direct/Indirect Linear

### Key Features

- 6063-T6 Extruded aluminum housing
- Highly reflective white painted reflector
- Room-Side Maintenance for LED system
- 5-year limited warranty covers LED, driver and fixture
- ETL Listed conforming to UL1598 in US and CSA 250 in Canada
- Approved for dry/damp location unless otherwise noted
- Maximum weight is 25 lbs. for a standard 4' fixture
- Buy American Act compliant
- Indigo-Clean available, see Indigo-Clean specification sheets for details



Example Part #: EX4DI-BW-HE-830HO-830-26'-AC48G1-U-OL2-1-0-W

DIRECT SHIELDING	INDIRECT SHIELDING	DIRECT SOURCE	INDIRECT SOURCE	LENGTH OR PATTERN	MOUNTING	VOLTAGE	DRIVER	CIRCUITING	BATTERY & EMERGENCY	FINISH	FIXTURE OPTIONS	CONTROLS
------------------	--------------------	---------------	-----------------	-------------------	----------	---------	--------	------------	---------------------	--------	-----------------	----------


---	---	-----	-----	
DIRECT SHIELDING	INDIRECT SHIELDING	DIRECT SOURCE <i>QS</i> <sup>1</sup>	INDIRECT SOURCE <i>QS</i> <sup>1</sup>	
<b>A</b> - Satine Lens <i>QS</i> <b>AL</b> - Drop Lens <b>HE</b> - High Efficiency <i>QS</i> <b>BW</b> - Batwing <i>QS</i> <b>WHE</b> - Asymmetric <i>QS</i> <b>HED</b> - Descent <b>MOD</b> - Mod options available <i>Shielding pg. 2</i>	<b>HE</b> - High Efficiency <i>QS</i> <b>BW</b> - Batwing <i>QS</i> <b>WHE</b> - Asymmetric <i>QS</i> <b>HEA</b> - Ascent <b>MOD</b> - Mod options available <i>Shielding pg. 2</i>	<b>27</b> - 2700K <b>30</b> - 3000K <b>35</b> - 3500K ( <i>available as BIOS</i> ) <b>40</b> - 4000K ( <i>available as BIOS</i> ) <b>TW3</b> - Tunable White ( <i>Blanco 3</i> ) <b>CL</b> - Custom Lumens <b>CW</b> - Custom Watts <b>MOD</b> - Mod options available <i>Lumen Output pg. 2-3</i>	<b>27</b> - 2700K <b>30</b> - 3000K <b>35</b> - 3500K <b>40</b> - 4000K <b>B</b> - BIOS <b>TW3</b> - Tunable White ( <i>Blanco 3</i> ) <b>CL</b> - Custom Lumens <b>CW</b> - Custom Watts <b>MOD</b> - Mod options available <i>Lumen Output pg. 3-4</i>	
---	-----	-	---	
LENGTH OR PATTERN <sup>2</sup>	MOUNTING <sup>3</sup>	VOLTAGE	DRIVER	CIRCUITING
<b>---</b> Individual Fixture <i>QS</i> <b>---</b> Continuous Row <i>QS</i> <b>L</b> - L Shape <i>QS</i> <b>R</b> - Rectangle <i>QS</i> <b>S</b> - Square <i>QS</i> <b>U</b> - U-Shape <i>QS</i> <b>T</b> - T Shape <b>X</b> - X Shape <b>MOD</b> - Mod options available <i>Length and Pattern pg. 4-5</i>	<b>AC</b> - <b>G</b> - (M)AC to Grid <i>QS</i> <b>AC</b> - <b>JB</b> - (M)AC to J Box <i>QS</i> <b>AC</b> - <b>ST</b> - (M)AC to Structure <i>QS</i> <b>AC5</b> - <b>G</b> - 5" Non-Power Canopy <b>AC5</b> - <b>JB</b> - 5" Non-Power Canopy <b>SQ</b> - <b>G</b> - 5" Square Canopy <b>SQ</b> - <b>JB</b> - 5" Square Canopy <b>WA</b> - Wall Mount <i>QS</i> <b>MOD</b> - Mod options available <i>Mounting pg. 6</i>	<b>U</b> - Universal <i>QS</i> <i>(120 thru 277V)</i> <b>1</b> - 120V <i>QS</i> <b>2</b> - 277V <i>QS</i> <b>3</b> - 347V <i>Voltage pg. 6</i>	<b>FSD</b> - Factory Select Driver ( <i>1%, 0-10v</i> ) <i>QS</i> <b>PL2</b> - Advance Xitanium ( <i>1%, 0-10v</i> ) <i>QS</i> <b>OL2</b> - Osram ( <i>1%, 0-10v</i> ) <i>QS</i> <b>OL4</b> - Osram 347v ( <i>1%, 0-10v</i> ) <b>EE1</b> - eldoLED ECODrive ( <i>1%, 0-10v</i> ) <b>ES1</b> - eldoLED SOLOdrive ( <i>0.1%, 0-10v</i> ) <b>LH1</b> - Lutron Hi-lume ( <i>1%, EcoSystem</i> ) <b>PR1</b> - Advance Xitanium SR <b>MOD</b> - Mod options available <i>Driver pg. 7</i>	<b>1</b> - Single Circuit <i>QS</i> <b>2</b> - Dual Circuit <b>M</b> - Multi Circuit <b>E</b> - Emergency <i>QS</i> <i>(entire fixture)</i> <b>N</b> - Night Light <i>QS</i> <i>(entire fixture)</i> <i>Circuiting pg. 7</i>
---	---	---	---	
BATTERY & EMERGENCY <sup>4</sup>	FINISH	FIXTURE OPTIONS <sup>5</sup>	CONTROLS <sup>6</sup>	
<b>0</b> - None <i>QS</i> <b>FSB</b> - Factory Select Battery <b>FSG</b> - Factory Select ALCR <b>GI</b> - Iota ETS DR <b>GB</b> - Bodine GTD <b>IC</b> - Iota 10W <i>QS</i> <b>P</b> - Bodine 10W <i>Battery and Emergency pg. 8</i>	<b>W</b> - White <i>QS</i> <b>S</b> - Metallic Silver <i>QS</i> <b>BL</b> - Textured Black <i>QS</i> <b>BR</b> - Bronze <b>GR</b> - Graphite <b>CC</b> - Custom Color <i>Finish pg. 8</i>	<b>QS</b> - Quick Ship <i>QS</i> <b>DSP</b> - Customer Supplied Battery/Driver/ Sensor <b>MOD</b> - Mod options available <i>Fixture Options pg. 8</i>	<b>DLMFC</b> - Wattstopper DLM ( <i>wired</i> ) <b>DLMFS</b> - Wattstopper LLLC ( <i>wireless</i> ) <b>EASYS</b> - Philips EasySense ( <i>wireless</i> ) <b>SNSLM</b> - Encelium Sensilum ( <i>wireless</i> ) <b>WVLX</b> - Eaton Wavelinx ( <i>wireless</i> ) <b>VDO</b> - Lutron Vive Sensor ( <i>wireless</i> ) <b>VRF</b> - Lutron Vive Connected ( <i>wireless</i> ) <b>ENL</b> - Enlighted ( <i>wireless</i> ) <b>MOD</b> - Mod options available <i>Controls pg. 9</i>	

1. When specifying SOURCE the first \_ is for specifying either 8 - 80CRI, or 9 - 90CRI. The ending \_ \_ are for specifying output, example HO - High Output. If specifying QS output is 80 CRI, all color temperatures, all lumen packages. Does not include Tunable White. See output charts for more information. 2. Individual fixtures come in 2', 3', 4', 5', 6', 7' & 8' lengths. Continuous row come in 1/8" increments. For Mod layouts specify pattern shape and overall dimensions. Example: L6x4: L pattern that is 6'x4'. 3. Specify AC Cable: Standard single AC = AC or Movable AC = MAC; Specify AC length standard AC is 48"; Specify grid: G1=15/16", G9=9/16", GS=Screw Slot. Example: AC48G1 4. Enter quantity for Battery and Emergency, Example 2P. 5. QS must be used in fixture options section of part number to qualify. 1/8" increments not available for QS. LMR option only available with 120v. 6. Controls can only be used with Single Circuit (1) or Emergency Circuit (E). See Controls chart on page 5 for driver options and more information.


Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



## Direct Shielding

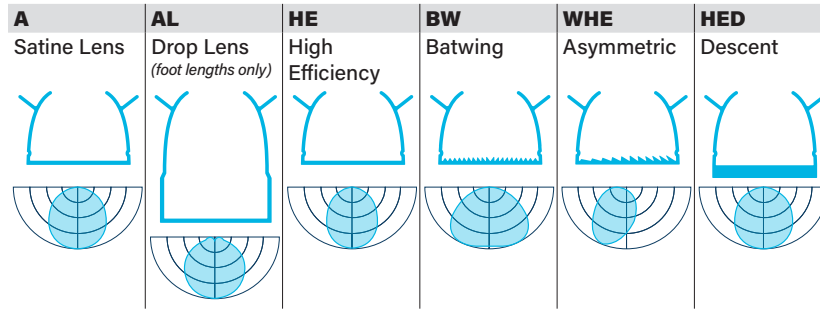

## Indirect Shielding

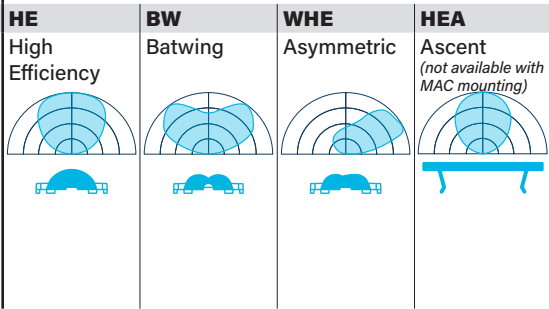

## Shielding: MOD Options

- Specify **MOD** in the part number for any of the below options
- Consult factory for MOD specification details, pricing, and lead-time information

**MOD** Clear lens overlay

## Direct Source: White LED<sup>1</sup>

- Specify either 80 or 90 CRI
- Longer lead-time may apply for 90 CRI. Consult factory
- 90 CRI = R9≥50

## Custom Output - Lumens OR Wattage

**CL** \_\_\_\_\_ Specify CRI, CCT and desired lumens (i.e. CL835500) *Specify lumens between standard offering listed below. Lumens are specified per color temp*

**CW** \_\_\_\_\_ Specify CRI, CCT and desired wattage (i.e. CW9407) *Specify watts between standard offering listed below*

### 80 CRI

	Color	Lumens per foot	Shielding <sup>1</sup>											
			<b>A</b>		<b>AL</b>		<b>HE</b>		<b>BW</b>		<b>WHE</b>		<b>HED</b>	
			Satine LPW	Watts/ft	Drop LPW	Watts/ft	High Efficiency LPW	Watts/ft	Batwing LPW	Watts/ft	Asymmetric LPW	Watts/ft	Descent LPW	Watts/ft
<b>830</b>	3000K	500	108	4.6	118	4.2	123	4.1	120	4.2	124	4.0	106	4.7
<b>830HO</b>	3000K	750	110	6.8	117	6.4	128	5.9	119	6.3	123	6.1	108	6.9
<b>830VHO</b>	3000K	1000	110	9.1	120	8.3	131	7.6	122	8.2	126	7.9	109	9.2
<b>835</b>	3500K	500	111	4.5	122	4.1	127	3.9	123	4.1	123	4.1	110	4.6
<b>835HO</b>	3500K	750	111	6.8	121	6.2	132	5.7	123	6.1	127	5.9	112	6.7
<b>835VHO</b>	3500K	1000	114	8.8	124	8.0	133	7.5	126	7.9	131	7.7	113	8.9
<b>840</b>	4000K	500	111	4.5	122	4.1	127	3.9	123	4.1	123	4.1	110	4.6
<b>840HO</b>	4000K	750	111	6.8	121	6.2	132	5.7	123	6.1	127	5.9	112	6.7
<b>840VHO</b>	4000K	1000	114	8.8	124	8.0	133	7.5	126	7.9	131	7.7	113	8.9

### 90 CRI

<b>927</b>	2700K	500	89	5.6	98	5.1	104	4.8	99	5.0	102	4.9	88	5.7
<b>927HO</b>	2700K	750	90	8.3	99	7.6	106	7.1	99	7.6	102	7.3	89	8.4
<b>927VHO</b>	2700K	1000	90	11.1	99	10.1	106	9.4	100	10.0	104	9.7	88	11.4
<b>930</b>	3000K	500	97	5.1	104	4.8	113	4.4	106	4.7	109	4.6	96	5.2
<b>930HO</b>	3000K	750	99	7.6	106	7.0	113	6.6	108	6.9	112	6.7	97	7.7
<b>930VHO</b>	3000K	1000	98	10.2	107	9.4	116	8.6	108	9.2	112	8.9	97	10.3
<b>935</b>	3500K	500	97	5.2	104	4.8	113	4.4	105	4.7	109	4.6	96	5.2
<b>935HO</b>	3500K	750	98	7.6	106	7.1	112	6.7	108	7.0	111	6.7	97	7.7
<b>935VHO</b>	3500K	1000	98	10.2	106	9.4	116	8.6	108	9.3	112	9.0	97	10.3
<b>940</b>	4000K	500	97	5.2	104	4.8	113	4.4	105	4.7	109	4.6	96	5.2
<b>940HO</b>	4000K	750	98	7.6	106	7.1	112	6.7	108	7.0	111	6.7	97	7.7
<b>940VHO</b>	4000K	1000	98	10.2	106	9.4	116	8.6	108	9.3	112	9.0	97	10.3

Direct Source: BIOS<sup>1</sup>

- CRI >84, R9 >90
- Spectrum focused lighting for circadian stimulus
- High EML or M/P ratio: .8 for 3500K, .9 for 4000K

- CRI: ≤3.3
- Available for use with most Driver or Control options

## Custom Output - Lumens OR Wattage

<b>CLB</b> _____	Specify CRI, CCT and desired lumens (i.e. CL835500)	Specify lumens between standard offering listed below. Lumens are specified per color temp
<b>CWB</b> _____	Specify CRI, CCT and desired wattage (i.e. CW9407)	Specify watts between standard offering listed below

## BIOS

	Color	Lumens per foot	Shielding <sup>1</sup>		HE High Efficiency		BW Batwing	
			A Satine					
			LPW	Watts/ft	LPW	Watts/ft	LPW	Watts/ft
<b>B35</b>	3500K	500	69	7.2	79	6.3	79	6.3
<b>B35HO</b>	3500K	750	69	10.9	80	9.4	79	9.6
<b>B35VHO</b>	3500K	1000	N/A		77	13.0	N/A	
<b>B40</b>	4000K	500	71	7.0	81	6.1	80	6.2
<b>B40HO</b>	4000K	750	70	10.6	82	9.1	81	9.3
<b>B40VHO</b>	4000K	1000	N/A		79	12.6	N/A	

<sup>1</sup>LPW and watts/ft based off 48" fixture size.Direct Source: Blanco<sup>1</sup>

- CRI >90, R9 >92
- 3 Channel tunable white for precise black body curve CCT
- Allows for high color consistency between fixtures

- Self-commissioning with Wattstopper DLM integrated controls
- Requires Control Ordering Code **B3LM** (pg. 6)
- Requires Drive Ordering Code **EC2** (pg. 4)

## Blanco 3 Tunable White (TW3)

	Range	Shielding <sup>1</sup>		HE High Efficiency		BW Batwing	
		A Satine					
		Lumens/ft	LPW	Watts/ft	Lumens/ft	LPW	Watts/ft
<b>TW3</b>	2700- 6500K	635	74	8.6	720	84	8.6

<sup>1</sup>Lumens/ft LPW and watts/ft based off 48" fixture at full output at 4000K.Indirect Source: White LED<sup>1</sup>

## Custom Output - Lumens OR Wattage

<b>CL</b> _____	Specify CRI, CCT and desired lumens (i.e. CL835500)	Specify lumens between standard offering listed below. Lumens are specified per color temp
<b>CW</b> _____	Specify CRI, CCT and desired wattage (i.e. CW9407)	Specify watts between standard offering listed below

## 80 CRI

	Color	Lumens per foot	Shielding <sup>1</sup>		HE High Efficiency		BW Batwing		WHE Asymmetric		HEA Ascent	
			LPW	Watts/ft	LPW	Watts/ft	LPW	Watts/ft	LPW	Watts/ft	LPW	Watts/ft
<b>830</b>	3000K	500	140	3.6	131	3.8	119	4.2	125	4.0		
<b>830HO</b>	3000K	750	146	5.1	135	5.5	119	6.3	125	6.0		
<b>830VHO</b>	3000K	1000	147	6.8	137	7.3	122	8.2	128	7.8		
<b>835</b>	3500K	500	145	3.4	135	3.7	123	4.1	125	4.0		
<b>835HO</b>	3500K	750	151	5.0	141	5.3	122	6.1	129	5.8		
<b>835VHO</b>	3500K	1000	148	6.8	141	7.1	126	8.0	133	7.5		
<b>840</b>	4000K	500	145	3.4	135	3.7	123	4.1	125	4.0		
<b>840HO</b>	4000K	750	151	5.0	141	5.3	122	6.1	129	5.8		
<b>840VHO</b>	4000K	1000	148	6.8	141	7.1	126	8.0	133	7.5		

## 90 CRI

<b>927</b>	2700K	500	118	4.2	110	4.5	99	5.1	102	4.9		
<b>927HO</b>	2700K	750	118	6.4	110	6.8	98	7.6	104	7.2		
<b>927VHO</b>	2700K	1000	121	8.3	113	8.9	100	10.0	105	9.5		
<b>930</b>	3000K	500	124	4.0	120	4.2	105	4.7	111	4.5		
<b>930HO</b>	3000K	750	129	5.8	120	6.3	107	7.0	111	6.8		
<b>930VHO</b>	3000K	1000	132	7.6	123	8.2	108	9.3	114	8.8		
<b>935</b>	3500K	500	124	4.0	120	4.2	105	4.8	111	4.5		
<b>935HO</b>	3500K	750	128	5.8	119	6.3	107	7.0	110	6.8		
<b>935VHO</b>	3500K	1000	132	7.6	122	8.2	107	9.3	113	8.8		
<b>940</b>	4000K	500	124	4.0	120	4.2	105	4.8	111	4.5		
<b>940HO</b>	4000K	750	128	5.8	119	6.3	107	7.0	110	6.8		
<b>940VHO</b>	4000K	1000	132	7.6	122	8.2	107	9.3	113	8.8		

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568

EX4DI\_LED\_SPEC\_APRIL2023



Indirect Source: BIOS<sup>1</sup>

## Custom Output - Lumens OR Wattage

<b>CLB</b> _____	Specify CRI, CCT and desired lumens (i.e. CL835500)	Specify lumens between standard offering listed below. Lumens are specified per color temp
<b>CWB</b> _____	Specify CRI, CCT and desired wattage (i.e. CW9407)	Specify watts between standard offering listed below

## BIOS

	Color	Lumens per foot	Shielding <sup>1</sup> <b>HE</b> High Efficiency	
			LPW	Watts/ft
<b>B35</b>	3500K	500	85	5.9
<b>B35HO</b>	3500K	750	84	8.9
<b>B35VHO</b>	3500K	1000	83	12.1
<b>B40</b>	4000K	500	87	5.7
<b>B40HO</b>	4000K	750	86	8.7
<b>B40VHO</b>	4000K	1000	85	11.7

<sup>1</sup>LPW and watts/ft based off 48" fixture size.

Indirect Source: Blanco<sup>1</sup>

## Blanco 3 Tunable White (TW3)

	Range	Shielding <sup>1</sup> <b>HE</b> High Efficiency		
		Lumens/ft	LPW	Watts/ft
<b>TW3</b>	2700-6500K	783	92	8.5

<sup>1</sup>Lumens/ft LPW and watts/ft based off 48" fixture at full output at 4000K.

## Source: MOD Options

- Specify **MOD** in the part number for any of the below options
- All RGB\_ Source Options will require specific driver and control
- Consult factory for MOD specification details, pricing, and lead-time information


		Required Driver	Required Control
<b>MOD</b>	Color Changing RGB LED	EC1/EC4	DMX
	Color Changing RGB-W LED	EC1/EC4	DMX
	2 Channel Tunable White		

## Length

- For Continuous Runs, add 3/16" (4.7mm) for each end plate or 3/8" (9.5mm) to the overall length of the row
- BIOS and Blanco3 are only available in foot lengths







2	3	4	5	6	7	8	—
Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Cont. Run Specify nominal overall row length to the 1/8" Longer lead-time may apply for lengths to the 1/8". Consult factory.
24-3/8" (619.1mm)							
	36-3/8" (934.8mm)						
		48-3/8" (1228.7mm)					
			60-3/8" (1533.5mm)				
				72-3/8" (1838.3mm)			
					84-3/8" (2143.1mm)		
						96-3/8" (2447.9mm)	
							Specify to the 1/8" >>>

Pattern

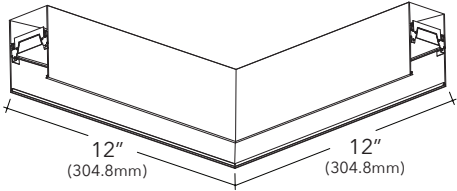

- Specify pattern shape and overall dimensions (includes corner dimensions)
- Refer to dimensions table below for available standard lengths
- All connectors are direct only
- 90 degree horizontal corners are 12"x12" (overall, outside dimension)
- Angles and shapes not shown require Mod Pattern; consult factory
- Only available with "A" or "HE" lens options


S_	R_x_	U_x_x_	L_x_	T_x_	X_x_
Square Provide A Example: <b>S4'</b> Minimum Length- 4'x4'	Rectangle Provide AxB Example: <b>R4'x4'</b> Minimum Length- 4'x4'	U-Shape Provide AxBxC Example: <b>U3'x4'x3'</b> Minimum Length- 3'x4'x3'	L-Shape Provide AxB Example: <b>L3'x3'</b> Minimum Length- 3'x3'	T-Shape Provide AxB Example: <b>T3'x5'</b> Minimum Length- 3'x5'	X-Shape Provide AxB Example: <b>X5'x5'</b> Minimum Length- 5'x5'



Length or Pattern: MOD Options

- Specify **MOD** in the part number for any of the below options
- Consult factory for MOD specification details, pricing, and lead-time information

MOD	Specify MOD for patterns, lengths or angles not shown above
	45- 180 degree angles
	Single-piece welded housings up to 4' x 4

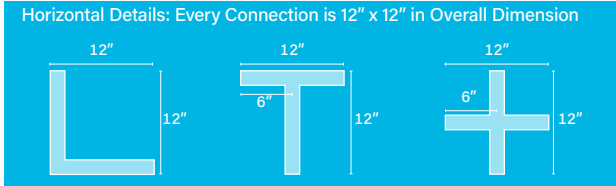




## Mounting


- Specify cable length in ordering code (AC48G1)
- Standard specifiable lengths are 48", 120", 240" and 350"
- End plates and power cord attached at factory
- Aircraft cable (AC) mounts on 4' (1219.2mm) and 8' (2438.4mm) centers
- Maximum recommended movable mounting locations are 12" from end of 4' fixture and 18" from end of 8' fixture
- Aircraft Cable supplied with 5" (127mm) power and 2" (50.8mm) non-power canopies
- Canopies and pendants match fixture finish, power cords are white, grey, or black depending on fixture finish. See Finish section for additional details.

- Approved for dry/damp location unless otherwise noted
- Refer to installation instructions during installation at the job site
- Maximum fixture weight is 25 lbs for a standard 4' fixture
- AC\_GS and MAC\_GS – works with screw slot and bolt slot grid ceiling types
- Wall Mount – ADA Compliant, bracket is 1/2" off wall
- MAC options not available with HEA lens option
- MAC options not available with HEA lens option
- For a wall mounted fixture with an indirect asymmetric lens, light will be directed away from the wall as a standard

AC_G1	Aircraft Cable 1" (15/16") T-Bar
AC_G9	Aircraft Cable 9/16" T-Bar
AC_GS	Aircraft Cable Screw Slot T-Bar
AC_JB	Aircraft Cable Junction Box
AC_ST	Aircraft Cable Structure
AC5_G	Aircraft Cable 5" (127mm) Non-Power Canopy
AC5_JB	Aircraft Cable 5" (127mm) Non-Power Canopy
SQ_G	Aircraft Cable 5" (127mm) Square Canopy
SQ_JB	Aircraft Cable 5" (127mm) Square Canopy
MAC_G1	Moveable AC 1" (15/16") T-Bar
MAC_G9	Moveable AC 9/16" T-Bar
MAC_GS	Moveable AC Screw Slot T-Bar
MAC_JB	Moveable AC Junction Box
MAC_ST	Moveable AC Structure
MAC5_G	Moveable AC 5" (127mm) Non-Power Canopy
MAC5_JB	Moveable AC 5" (127mm) Non-Power Canopy
MSQ_G	Moveable AC 5" (127mm) Square Canopy
MSQ_JB	Moveable AC 5" (127mm) Square Canopy
WA	Wall Mount

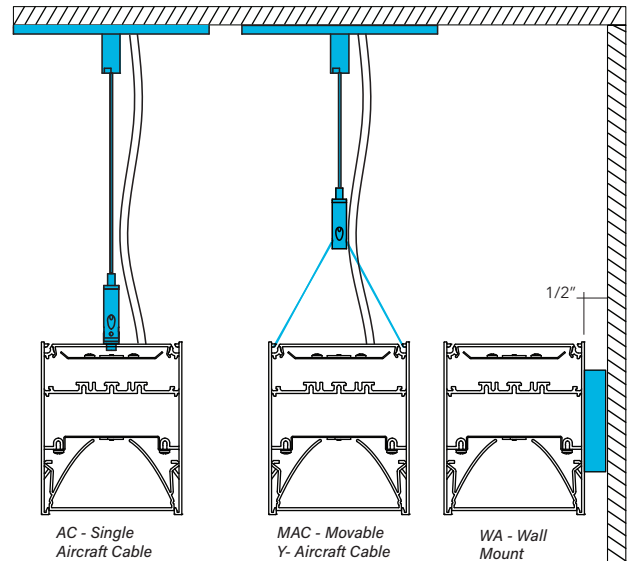

## Straight EDGE Joint System



- The Straight EDGE Joint comes standard for all runs.
- Two connection points – one to cinch fixtures together, the other to perfectly align all fixtures in a run.
- Factory-installed light shields on both sides of the fixture ensure no light leaks.
- Patented.

## Mounting: MOD Options

- Specify **MOD** in the part number for any of the below options
- Consult factory for MOD specification details, pricing, and lead-time information

**MOD** Pendant Pipe

## Voltage

- Some EX4DI configurations will not accommodate all voltage options; consult with factory

U	Universal
1	120 volt
2	277 volt
3	347 volt



## Driver

- Standard Driver Option = PL2
- Driver Lifetime: 50,000 hours at 25°C ambient operating conditions
- For more driver options see Pinnacle Resource Guide
- Some EX4DI configurations will not accommodate all driver options; consult with factory

### 0-10V Drivers

<b>FSD</b>	Factory Select Driver 1%, 0-10v
<b>PL2</b>	Signify Advance Xitanium 1%, 0-10v
<b>PL4</b>	Advance Xitanium 347v 1%, 0-10v, requires 347v
<b>OL2</b>	Osram Optotronic, 1%, 0-10v
<b>OL4</b>	Osram Optotronic 347v, 1% 0-10v, requires 347v option
<b>EE1</b>	eldoLED ECOdrive 1%, 0-10v Logarithmic
<b>EE2</b>	eldoLED ECOdrive 1%, 0-10v Linear
<b>ES1</b>	eldoLED SOLOdrive 0-10v, 0.1% Logarithmic
<b>ES2</b>	eldoLED SOLOdrive 0-10v, 0% Linear
<b>OL5</b>	Osram Optotronic 1%, 0-10v, AUX
<b>PL5</b>	Advance Xitanium 1%, 0-10v, AUX

### DALI Drivers

<b>EE3</b>	eldoLED ECOdrive .1%, DALI (logarithmic)
<b>ES3</b>	eldoLED SOLOdrive .1%, DALI (logarithmic)
<b>OD1</b>	Osram Optotronic 1%, DEXAL
<b>OD2</b>	Osram Optotronic 1%, DALI 2 Channel

### Lutron Drivers

<b>LH1</b>	Lutron Hi-lume Soft-on, Fade-to-black 1%, EcoSystem, LDE1
<b>LH4</b>	Lutron Hi-Lume 1%, 2-wire, Lutron-LTEA2W, 120v only

### Alternate Drivers

<b>PS1</b>	Signify Advance Xitanium Step Dimming 50%/100%
<b>PR1</b>	Philips Advance Xitanium SR, requires EASYS, VDO or VRF
<b>OD1</b>	Osram Optotronic 1%, DEXAL
<b>EH1</b>	ELV 120v only, 0-10v universal
<b>EC1</b>	Constant Voltage LED driver, 120v or 277v required

## Drivers: MOD Options

- Specify **MOD** in the part number for any of the below options
- Consult factory for MOD specification details, pricing, and lead-time information

<b>MOD</b>	Power Over Ethernet
------------	---------------------

## How to Specify Circuiting, Battery and Emergency

1

- Select fixture circuiting from options below
- Some EX4DI configurations will not accommodate all circuiting options, consult with factory

### Circuiting

<b>1</b>	Single Circuit
<b>2</b>	Dual Circuit
<b>M</b>	Multi Circuit
<b>E</b>	Emergency Circuit only
<b>N</b>	Night Light Circuit only

2

+

3

- Battery and emergency section options are available in addition to fixture circuit
- Select battery and emergency section options below; factory shop drawing required
- Some EX4DI configurations will not accommodate all circuiting options, consult with factory

## Battery and/or Emergency If Required

<b>0</b>	No battery or specific emergency section required
----------	---





## Battery

- Select battery section type if required, indicate total QTY. *Example 2PL*
- 90 minute battery runtime; test button location dependant on configuration, consult factory
- No battery option available for 2' or 3' lengths

- Entire direct fixture housing is on battery for lengths up to 5'
- Half of direct fixture is on battery for 6' or 8' housing lengths
- For more battery options available, see Pinnacle Resource Guide

<b>0</b>	No Battery
<b>_FSB</b>	Factory Select Battery (10w option)
<b>_FSBST</b>	Factory Select Battery (10w, Self Testing)
<b>_IC</b>	Iota 10w Integral
<b>_ILL</b>	Iota 10w Integral Lithium, Self Testing
<b>_IRH</b>	Iota 20w Remote
<b>_P</b>	Bodine 10w Integral
<b>_PRH</b>	Bodine 20w Remote
<b>_PLL</b>	Bodine 10w Integral Lithium, Self Testing

### For Approximate Battery Lumen Output

- Multiply battery wattage X fixture LPW shown on Lumen Table
- 92.3 (LPW) x 10 (watts) = 923 battery lumen output

## Emergency

- Select emergency section type if required, indicate total QTY. *Example 1E*
- Combine battery and emergency section ordering codes if both options are selected

<b>_FSG</b>	Factory Select Automatic Load Control Relay (ALCR), UNV
<b>_GI</b>	Emergency Transfer Switch (ETS) DR Emergency Control Device, UNV
<b>_GB</b>	Bodine GTD, Generator Transfer Device, 120v or 277v
<b>_E</b>	Emergency circuit section
<b>_N</b>	Night Light circuit section
<b>_L</b>	Life Safety circuit section NO THROUGH WIRE

### Battery OR Emergency Ordering Examples

- |  |                      |
|--|----------------------|
| • Single circuit, 10w Integral Battery | Ordering Code: 1-1PL |
| • Emergency only, 10w Integral Battery | Ordering Code: E-1PL |
| • Single circuit, GTD required         | Ordering Code: 1-1G  |

### Combination Section Ordering Examples

- |  |                        |
|--|------------------------|
| • Single circuit, (1) 10w battery, (1) emergency section | Ordering Code: 1-1PL1E |
| • Multi circuit, (2) 10w battery, (2) emergency sections | Ordering Code: M-2PL2E |
| • Single circuit, (1) night light section                | Ordering Code: 1-1N    |

## Finish

- Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes
- Selecting a fixture finish other than white may impact lumen output; consult factory for more information

<b>W</b>	White ( <i>white cord/white canopy</i> )
<b>S</b>	Metallic Silver ( <i>grey cord/silver canopy</i> )
<b>BL</b>	Textured Black ( <i>black cord/black canopy</i> )
<b>BR</b>	Bronze ( <i>white cord/bronze canopy</i> )
<b>GR</b>	Graphite ( <i>white cord/graphite canopy</i> )
<b>CC</b>	Custom Color ( <i>white cord/color match canopy</i> )

## Fixture Options

- Additional options to enhance the fixture and finish of the product
- Specify CC-C to match housing. If not specified, canopy will be standard matte white

<b>QS</b>	Quick Ship
<b>DSP</b>	Customer Supplied Battery/Driver/Sensor

## Fixture Options: MOD Options

- Specify **MOD** in the part number for any of the below options
- Consult factory for MOD specification details, pricing, and lead-time information

<b>MOD</b>	Remote Driver
	End Power Feed

## Quick Ship

Shielding	CRI, CCT & Output	Mounting		Voltage	Driver		Circuiting		Battery	Finish			
10-Day													
<b>A</b> - Direct <b>HE</b> - Direct <b>BW</b> - Direct <b>WHE</b> - Direct <b>HE</b> - Indirect <b>BW</b> - Indirect <b>WHE</b> - Indirect	80 CRI, all color temperatures, all lumen packages See pg 2	<b>(M)AC48G_</b> <b>(M)AC48JB</b> <b>(M)AC48ST</b>  <b>WA</b>	(M)AC to Grid (M)AC to J_BOX (M)AC to Stuc- ture Wall Mount	<b>U</b>  <b>1</b> <b>2</b>	Universal (120-277) 120V 277V	<b>FSD</b>  <b>PL2</b>  <b>OL2</b>	Factory Select Driver (1%, 0-10v) Advance Xitanium 0-10v, 1% Osram 0-10v, 1%	<b>1</b>  <b>E</b> <b>N</b>	Single Circuit Emergency Night Light	<b>0</b>  <b>_IC</b>	None Iota 10w Integral	<b>W</b>  <b>S</b> <b>BL</b>	White Silver Black

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Black QuickShip only available in 4', 6', and 8' individual lengths. Consult factory for larger projects.

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568

EX4DI\_LED\_SPEC\_APRIL2023





## Controls

- Pinnacle Lighting offers easy to specify network control solutions that connect to an intelligent centralized system to maximize lighting energy efficiencies or integral sensors for individual fixture control
- Pinnacle Lighting fixtures ship technology ready; commissioning by others
- Controls can only be used with Single Circuit (1) or Emergency Circuit (E)
- Contact factory for any non-standard configurations for layout, placement, or EM options
- One drop per sensor typical, consult factory for more information

	Solution	Components	Network/Sensor	Connection	Required Drivers	Limitations
<b>DLMFC</b>	Legrand Wattstopper DLM	LMFC-011	Digital Lighting Management (DLM)	Wired, two RJ45 ports	OL2, OL4	Not available with Battery
<b>DLMFS</b>	Legrand Wattstopper LLLC	LMFS-601-W / LMFI-111	Wireless DLM Fixture Sensor	Wireless	OD1, PR1, 0-10v	0-10v requires interface
<b>EASYS</b>	Philips EasySense	SNS-210	Daylight/PIR Occupancy	Wireless to switches	PR1	Not available with 347 volt
<b>SNSLM</b>	Encelium Sensilum	EN-CLM-PIR-DD-ZB	Encelium, Daylight/PIR Occupancy	Wireless	OD1, OL1, OL2	Not available with 347 volt
<b>WLVX</b>	Eaton Wavelinx	SWPD1, NSP3IVMVDC1	WaveLinX WCL, Daylight	Wireless	Any 0-10v	Not available with 347 volt
<b>VDO</b>	Lutron Vive Sensor	DFCSJ-OEM-OCC	Vive, Daylight/PIR Occupancy	Wireless	OD1, PR1	Not available with 347 volt
<b>VRF</b>	Lutron Vive Connected	DFCSJ-OEM-RF	Vive	Wireless	OD1, PR1	Not available with 347 volt
<b>ENLI</b>	Enlighted	SU-5E-IOT, CU-4E	Enlighted, Daylight/PIR Occupancy	Wireless	Any 0-10v	Not available with 347 volt
<b>ENLC</b>	Enlighted	SU-5E-CL, CU-4E	Enlighted, Daylight/PIR Occupancy	Wireless	Any 0-10v	Not available with 347 volt

## Controls: Tunable White

- Pinnacle Lighting offers easy to specify tunable white solutions for integrated building control solutions or standalone controls
- Pinnacle Lighting fixtures ship technology ready; commissioning by others
- Controls can only be used with Single Circuit (1) or Emergency Circuit (E)
- Contact factory for any non-standard configurations for layout or placement

	Solution	Components	Network/Sensor	Connection	Required Drivers	Required LED	Required Controls	Limitations
<b>B3LM</b>	Legrand Wattstopper Blanco 3	BLM3-DLM	Digital Lighting Management (DLM)	Wired, two RJ45 ports	EC2	TW3	B3LM	Not available with 347 volt

## Controls: MOD Options


- Specify **MOD** in the part number for any of the below options
- Control** Options may require specific driver. Refer to the chart below
- Consult factory for MOD specification details, pricing, and lead-time information

	Required Driver
<b>MOD</b>	Encelium Sensilum
	Enlighted (Wireless) - ENLI
	Enlighted (Wireless) - ENLC
	Acuity nLight Air Wireless Connected
	OD1, OL5
	Any 0-10v
	Any 0-10v
	EE6, ES6

## Photometrics

### Satine Lens - Open

Test # Scaled from ITL91451 & ITL91463  
 Catalog # EX4DI-BW-BW-840VHO-840VHO-4  
 Lumens 8000 lm  
 Watts 58.9 W  
 Efficacy 135.8 LPW



### Candela Distribution

Vert Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	1268	1268	1268	1268	1268
5	1262	1263	1266	1269	1270
15	1215	1218	1246	1271	1279
25	1117	1130	1197	1258	1280
35	977	1005	1107	1199	1236
45	806	845	963	1065	1100
55	615	656	763	848	872
65	418	449	527	574	580
75	219	237	278	294	292
85	51	61	69	68	67
90	8	54	96	90	97
95	73	144	225	208	195
105	221	300	495	562	539
115	369	438	649	873	925
125	486	570	785	1011	1089
135	572	666	906	1111	1185
145	655	725	934	1131	1207
155	729	768	892	1005	1052
165	784	799	848	892	909
175	811	814	819	823	826
180	814	814	814	814	814

### Luminance Data (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	20720	22599	24984
55	19447	21238	23211
65	17871	18722	19356
75	15161	14244	13612
85	10078	6705	5453

For all available IES files, please visit our website at [pinnacle-ltg.com](http://pinnacle-ltg.com). Photometry testing in accordance to IESNA-LM-79-08 at an NVLAP accredited testing laboratory. Testing conducted at 25°C ambient conditions.

Specifications and dimensions subject to change without notice. Specification sheets that appear on [pinnacle-ltg.com](http://pinnacle-ltg.com) are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | [pinnacle-ltg.com](http://pinnacle-ltg.com) | O: 303-322-5570 F: 303-322-5568

EX4DI\_LED\_SPEC\_APRIL2023



## Applications & Certificates

**Construction:** 6063-T6 Extruded aluminum housing. Highly reflective steel white painted reflector.

**Shielding:** Diffuse snap-in acrylic lens, removable for maintenance.

**Mounting:** Aircraft cable and wall mount available. Select from 2 aircraft cable options. Select the straight aircraft cable that mounts on 4'-0" (1219.2mm) and 8'-0" (2438.4mm) centers or the moveable adjustable Y-cable mount. The Y-Cable design allows for adjustable mounting locations. Aircraft Cable supplied with 5" (127mm) power and 2" (50.8mm) non-power canopies. Refer to installation instructions for appropriate ceiling detail. Canopies are painted white unless otherwise specified. Maximum fixture weight is 20 lbs. for a standard 4' fixture.

**White LED:** 25°C test environment. Lumen output/wattage has a margin of +/- 5%; 2' or 3' lengths may have a greater wattage deviation. Luminaire configurations tested in accordance with IES LM-79. Diodes tested in accordance with IES LM-80. Lifetime calculated using IES TM-21. Minimum lifetime greater than 60,000 hours. Lifetime Projection L70 = 146,500 hours and L90 = 45,000 hours. MacAdam 3-Step Ellipses. Not all products are Lighting Facts listed. For all available IES files, please visit our website at [pinnacle-ltg.com](http://pinnacle-ltg.com). Three lumen packages available. Standard, High (HO) and Very High (VHO). Custom outputs are available. Specify custom lumens or watts between standard offering listed on CRI, CCT & Output page. 80 CRI is available for 3000K, 3500K, and 4000K. 90 CRI is available for 2700K, 3000K, 3500K, and 4000K. 90 CRI = R9≥50.

**BIOS LED:** Spectrum focused lighting for circadian stimulus. EML or M/P ratio: .8 for 3500K, .9 for 4000K. COI >3.0. Not all lumen packages available. Three lumen packages available. Standard, High (HO) and Very High (VHO). Custom outputs are available. Specify custom lumens or watts between standard offering listed on CRI, CCT & Output page.

**Tunable White LED:** Blanco 3; 3 Channel tunable white for precise black body curve CCT. Self-commissioning with Wattstopper DLM integrated controls. Custom lumen output and color temperature configurations require use of controls.

**Voltage:** Universal (U), 120 volt (1), 277 volt (2) and 347 volt (3) options available. Must specify OL4 in Driver section when 347 volt (3) is selected. Some EDGE configurations will not accommodate all voltage options; consult with factory.

**Driver:** Standard Driver Option is Advance Xitanium 0-10V, 1% = PL2. Electronic driver, Power factor is >0.9 with a THD <20%. Driver Lifetime: 50,000 hours at 25°C ambient operating conditions. Ambient operating range: -20°F/-30°C to 94.3°F/34.6°C. For more driver options, see Pinnacle Resource Guide. Some EDGE configurations will not accommodate all driver options.

**Circuiting:** Select from single circuit (1), Multi circuit - For multiple circuiting and zone control, requires factory shop drawing (M), Emergency circuit (E), Life Safety (L) or Night

Light circuit (N). For emergency circuiting situations that require no through wire or circuit separation, Life Safety Circuit should be selected. This will provide a separate power feed and only the Life Safety Circuit in that section. Some EDGE configurations will not accommodate all circuiting options; consult with factory.

**Battery & Emergency:** Select battery or emergency options if required. If battery or emergency option is not required, enter 0. Battery duration is 90 minutes as standard. Test button location dependant on configuration, consult factory. For more Battery options, see Pinnacle Resource Guide.

**Finish:** Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes or for additional custom color and finish options.

**Controls:** DLM utilizes wired network connections for digital control through switching and dimming. nLight Air rES7 sensor provides wireless control, daylight harvesting and occupancy detection with PIR using eldoLED LED drivers. nLight Air rES7 sensor provides wireless control, daylight harvesting and occupancy detection with PDT using eldoLED LED drivers. nLight Air rIO module provides wireless control using eldoLED LED drivers. EasySense sensor provides daylight harvesting and PIR occupancy detection using the SR LED driver; the Philips app provides advanced configurations. ENCELIUM SensiLUM sensor provides wireless control, daylight harvesting and PIR occupancy; driver data is available when using the DEXAL driver. ENCELIUM SensiLUM sensor provides wireless control, daylight harvesting and PIR occupancy; driver data is available when using the DEXAL driver. Wavelinx Connected Lighting sensor provides wireless control and daylight harvesting using 0-10V LED drivers. Lutron Vive sensor provides wireless control, daylight harvesting and PIR occupancy detection using DEXAL or SR LED drivers. Lutron Vive module provides wireless control using DEXAL or SR LED drivers. Enlighted Smart Sensor provides multi-functionality including daylight harvesting and PIR occupancy; for IOT platform using 0-10v LED drivers. Enlighted Smart Sensor provides multi-functionality including daylight harvesting and PIR occupancy; for Connected platform using 0-10v LED drivers.

**Labels:** UL and cUL 2108 or 1598 listed depending on product configuration. Standard, HO and VHO lumen packages are IC Rated, approved for dry/damp location unless otherwise noted.

**Fixture Weight:** Maximum fixture weight is 25lbs per 4' fixture.

**Buy American Act Compliant**

**Warranty:** EDGE LED offered with a 5-year limited warranty. Covers LED, driver and fixture.