

# EDGE EX3DIWW

3" Suspended Direct/Indirect  
Linear Wall Wash

## Key Features

- 6063-T5 Extruded aluminum housing
- Extruded aluminum module with micro reflector for perfect wall washing illumination
- Highly reflective die-formed white painted reflector
- Room-Side Maintenance for LED system
- 5-year limited warranty covers LED, driver and fixture
- UL and cUL listed
- Approved for dry/damp location unless otherwise noted
- Maximum weight is 25 lbs. for a standard 4' fixture
- Buy American Act compliant



Example Part #: EX3DI-WW-HE-830HO-830-26'-AC48G1-U-FSD-1-0-W

## EX3DI-WW

DIRECT  
SHIELDING

INDIRECT  
SHIELDING

DIRECT  
OUTPUT

INDIRECT  
OUTPUT

LENGTH OR  
PATTERN

MOUNTING

VOLTAGE

DRIVER

CIRCUITING

BATTERY &  
EMERGENCY

FINISH

FIXTURE  
OPTIONS

WW	---	-----	-----
DIRECT SHIELDING	INDIRECT SHIELDING	DIRECT CRI, CCT & OUTPUT	INDIRECT CRI, CCT & OUTPUT
<b>WW</b> - Wall Wash <i>Shielding pg. 2</i>	<b>HE</b> - High Efficiency <b>BW</b> - Batwing <b>WHE</b> - Asymmetric <b>HEA</b> - Ascent <i>Shielding pg. 2</i>	<b>27</b> - 2700K <b>30</b> - 3000K <b>35</b> - 3500K <b>40</b> - 4000K <b>CL</b> - Custom Lumens <b>CW</b> - Custom Watts <i>Lumen Output pg. 2</i>	<b>27</b> - 2700K <b>30</b> - 3000K <b>35</b> - 3500K <b>40</b> - 4000K <b>CL</b> - Custom Lumens <b>CW</b> - Custom Watts <i>Lumen Output pg. 2</i>

---	-----	---	---
LENGTH <sup>1</sup>	MOUNTING <sup>2</sup>	VOLTAGE	DRIVER
<b>---</b> - Individual Fixture <b>---</b> - Continuous Row <i>Length pg. 3</i>	<b>AC_G</b> - (M)AC to Grid <b>AC_JB</b> - (M)AC to J Box <b>AC_ST</b> - (M)AC to Structure <b>AC5_G</b> - 5" Non-Power Canopy <b>AC5_JB</b> - 5" Non-Power Canopy <b>SQ_G</b> - 5" Square Canopy <b>SQ_JB</b> - 5" Square Canopy <i>Mounting pg. 3</i>	<b>U</b> - Universal <i>(120 thru 277V)</i> <b>1</b> - 120V <b>2</b> - 277V <b>3</b> - 347V <i>Voltage pg. 4</i>	<b>FSD</b> - Factory Select Driver (1%, 0-10v) <b>PL2</b> - Advance Xitanium (1%, 0-10v) <b>PL4</b> - Advance Xitanium 347v (1%, 0-10v) <b>EE1</b> - eldoLED ECoderive (1%, 0-10v) <b>ES1</b> - eldoLED SOLOdrive (0.1%, 0-10v) <b>LH1</b> - Lutron Hi-lume (1%, EcoSystem) <b>PS1</b> - Advance Xitanium (50%/100%) <b>OL2</b> - eldoLED Optotronic (1%, 0-10v) <i>Driver pg. 4</i>

---	---	---	---
CIRCUITING	BATTERY & EMERGENCY <sup>3</sup>	FINISH	FIXTURE OPTIONS
<b>1</b> - Single Circuit <b>2</b> - Dual Circuit <b>M</b> - Multi Circuit <b>E</b> - Emergency <i>(entire fixture)</i> <b>N</b> - Night Light <i>(entire fixture)</i> <i>Circuiting pg. 5</i>	<b>0</b> - None <b>FSG</b> - Factory Select ALCR <b>FSB</b> - Factory Select Battery <b>GI</b> - Iota ETS DR <b>GB</b> - Bodine GTD <b>PLL</b> - Bodine 10W Integral <b>ILL</b> - Iota 10W Integral <b>E</b> - Emergency Circuit Section <b>N</b> - Night Light Circuit Section <b>L</b> - Life Safety Circuit Section <i>Battery and Emergency pg. 5</i>	<b>W</b> - White <b>S</b> - Metallic Silver <b>BL</b> - Textured Black <b>BR</b> - Bronze <b>GR</b> - Graphite <b>CC</b> - Custom Color <i>Finish pg. 5</i>	<b>DSP</b> - Customer Supplied Battery/Driver/ Sensor <i>Fixture Options pg. 5</i>

1. When specifying SOURCE the first \_ is for specifying either 8 - 80CRI, or 9 - 90CRI. The ending \_ are for specifying output, example HO - High Output. 2. Individual fixtures come in 2', 3', 4', 5', 6', 7' & 8' lengths. Continuous row come in 1/8" increments. 3. Specify AC Cable: Standard single AC = AC or Movable AC = MAC; Specify AC length standard AC is 48"; Specify grid: G1=15/16"; G9=9/16"; GS=Screw Slot. Example: AC48G1  
4. Enter quantity for Battery and Emergency, Example 2P.

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



## Direct Shielding

## Indirect Shielding

WW	HE	BW	WHE	HEA
Wall Wash	High Efficiency	Batwing	Asymmetric	Ascent (No MAC mounting foot lengths only)

## Direct Output

- Specify either 80 or 90 CRI
- Longer lead-time may apply for 90 CRI. Consult factory.
- 90 CRI = R9≥50

## Custom Output- Lumens OR Wattage

CL	Specify CRI, CCT and desired lumens (i.e. CL835400)	Max Lumens: 1074lm/ft. Max lumens dependent on color temp. Consult factory for more information
CW	Specify CRI, CCT and desired wattage (i.e. CW9407)	Max Watts: 14.8 watts/ft. Consult factory for more information.

## Direct 80 CRI

	Color	Lumens per foot	Shielding WW Wall Wash LPW	Watts/ft
830	3000K	500	69	7.2
830HO	3000K	750	68	11.1
830VHO	3000K		N/A	
835	3500K	500	73	6.8
835HO	3500K	750	72	10.4
835VHO	3500K	1000	70	14.4
840	4000K	500	76	6.5
840HO	4000K	750	75	10.0
840VHO	4000K	1000	73	13.8

## Direct 90 CRI

927	2700K	500	57	8.8
927HO	2700K	750	55	13.7
927VHO	2700K		N/A	
930	3000K	500	62	8.0
930HO	3000K	750	61	12.3
930VHO	3000K		N/A	
935	3500K	500	65	7.7
935HO	3500K	750	64	11.8
935VHO	3500K		N/A	
940	4000K	500	63	8.0
940HO	4000K	750	61	12.3
940VHO	4000K		N/A	



## Indirect Output

## Custom Output - Lumens OR Wattage

**CL** \_\_\_\_\_ Specify CRI, CCT and desired lumens (i.e. CL835500)

Max Lumens: HE = 1,968, BW = 1,837, WHE = 1,619, HEA = 1,704. Max lumens dependent on color temp.

**CW** \_\_\_\_\_ Specify CRI, CCT and desired wattage (i.e. CW9407)

Max Watts: 13.4 watts/ft. Consult factory for more information.

## Indirect 80 CRI

	Color	Lumens per foot	Shielding <sup>1</sup>		BW		WHE		HEA	
			HE High Efficiency LPW	Watts/ft	Batwing LPW	Watts/ft	Asymmetric LPW	Watts/ft	Ascent LPW	Watts/ft
<b>830</b>	3000K	500	140	3.6	131	3.8	119	4.2	125	4.0
<b>830HO</b>	3000K	750	146	5.1	135	5.5	119	6.3	125	6.0
<b>830VHO</b>	3000K	1000	147	6.8	137	7.3	122	8.2	128	7.8
<b>835</b>	3500K	500	145	3.4	135	3.7	123	4.1	125	4.0
<b>835HO</b>	3500K	750	151	5.0	141	5.3	122	6.1	129	5.8
<b>835VHO</b>	3500K	1000	148	6.8	141	7.1	126	8.0	133	7.5
<b>840</b>	4000K	500	145	3.4	135	3.7	123	4.1	125	4.0
<b>840HO</b>	4000K	750	151	5.0	141	5.3	122	6.1	129	5.8
<b>840VHO</b>	4000K	1000	148	6.8	141	7.1	126	8.0	133	7.5

## Indirect 90 CRI

<b>927</b>	2700K	500	118	4.2	110	4.5	99	5.1	102	4.9
<b>927HO</b>	2700K	750	118	6.4	110	6.8	98	7.6	104	7.2
<b>927VHO</b>	2700K	1000	121	8.3	113	8.9	100	10.0	105	9.5
<b>930</b>	3000K	500	124	4.0	120	4.2	105	4.7	111	4.5
<b>930HO</b>	3000K	750	129	5.8	120	6.3	107	7.0	111	6.8
<b>930VHO</b>	3000K	1000	132	7.6	123	8.2	108	9.3	114	8.8
<b>935</b>	3500K	500	124	4.0	120	4.2	105	4.8	111	4.5
<b>935HO</b>	3500K	750	128	5.8	119	6.3	107	7.0	110	6.8
<b>935VHO</b>	3500K	1000	132	7.6	122	8.2	107	9.3	113	8.8
<b>940</b>	4000K	500	124	4.0	120	4.2	105	4.8	111	4.5
<b>940HO</b>	4000K	750	128	5.8	119	6.3	107	7.0	110	6.8
<b>940VHO</b>	4000K	1000	132	7.6	122	8.2	107	9.3	113	8.8

## Length

- All individual units cannot be joined, end plates are factory installed and cannot be removed
- For continuous runs, add 1/4" (6.4mm) for each end plate or 1/2" (12.7mm) to the overall length of the row

2	3	4	5	6	7	8	—
Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Cont. Run Specify nominal overall row length to the 1'
24" (609.6mm)							
36" (914.4mm)							
48" (1219.2mm)							
60" (1524mm)							
72" (1828.8mm)							
84" (2133.6mm)							
96" (2438.4mm)							

Specify to the 1' &gt;&gt;&gt;




## Mounting

- Specify cable length in ordering code (AC48G1)
- Standard specifiable lengths are 48", 120", 240" and 350"
- End plates and power cord attached at factory
- Aircraft cable (AC) mounts on 4' (1219.2mm) and 8' (2438.4mm) centers
- Maximum movable mounting locations are 12" from end of 4' fixture and 18" from end of 8' fixture
- Aircraft Cable supplied with 5" (127mm) power and 2" (50.8mm) non-power canopies

<b>AC_G1</b>	Aircraft Cable 1" (15/16") T-Bar
<b>AC_G9</b>	Aircraft Cable 9/16" T-Bar
<b>AC_GS</b>	Aircraft Cable Screw Slot T-Bar
<b>AC_JB</b>	Aircraft Cable Junction Box
<b>AC_ST</b>	Aircraft Cable Structure
<b>AC5_G</b>	Aircraft Cable 5" (127mm) Non-Power Canopy
<b>AC5_JB</b>	Aircraft Cable 5" (127mm) Non-Power Canopy
<b>SQ_G</b>	Aircraft Cable 5" (127mm) Square Canopy
<b>SQ_JB</b>	Aircraft Cable 5" (127mm) Square Canopy
<b>MAC_G1</b>	Moveable AC 1" (15/16") T-Bar
<b>MAC_G9</b>	Moveable AC 9/16" T-Bar
<b>MAC_GS</b>	Moveable AC Screw Slot T-Bar
<b>MAC_JB</b>	Moveable AC Junction Box
<b>MAC_ST</b>	Moveable AC Structure
<b>MAC5_G</b>	Moveable AC 5" (127mm) Non-Power Canopy
<b>MAC5_JB</b>	Moveable AC 5" (127mm) Non-Power Canopy
<b>MSQ_G</b>	Moveable AC 5" (127mm) Square Canopy
<b>MSQ_JB</b>	Moveable AC 5" (127mm) Square Canopy

- Canopies and pendants match fixture finish, power cords are white, grey, or black depending on fixture finish. See Finish section for additional details
- Approved for dry/damp location unless otherwise noted
- Refer to installation instructions during installation at the job site
- Maximum fixture weight is 25 lbs for a standard 4' fixture
- AC\_GS and MAC\_GS - works with screw slot and bolt slot grid ceiling types
- Designed to be 12"-18" away from wall for optimal performance

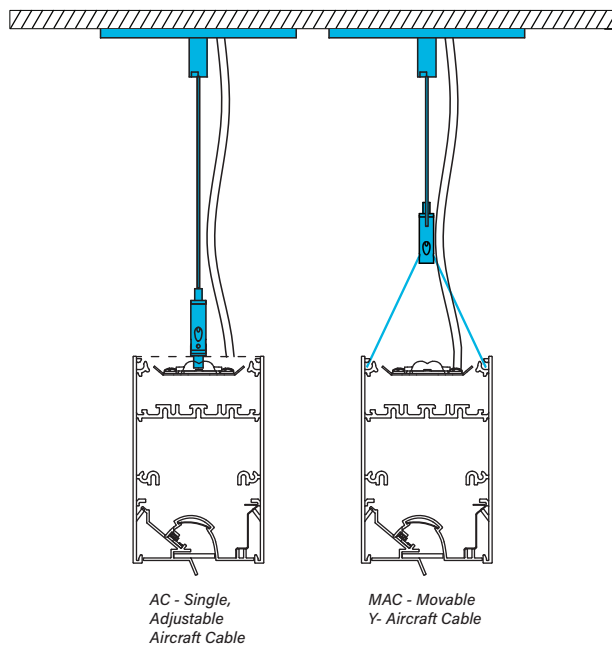

## Voltage

- Some EX3DIWW configurations will not accommodate all voltage options; consult with factory

<b>U</b>	Universal
<b>1</b>	120 volt
<b>2</b>	277 volt
<b>3</b>	347 volt

## Driver

- Standard Driver Option = FSD
- Driver Lifetime: 50,000 hours at 25°C ambient operating conditions
- For more driver options see Pinnacle Resource Guide
- Some EX3DIWW configurations will not accommodate all driver options; consult with factory

### 0-10V Drivers

<b>FSD</b>	Factory Select Driver 1%, 0-10v
<b>PL2</b>	Signify Advance Xitanium 1%, 0-10v
<b>PL4</b>	Advance Xitanium 347v 1%, 0-10v, requires 347v
<b>OL2</b>	eldoLED Optotronic, 1%, 0-10v
<b>OL4</b>	eldoLED Optotronic 347v, 1% 0-10v, requires 347v option
<b>EE1</b>	eldoLED ECOdrive 1%, 0-10v Logarithmic
<b>EE2</b>	eldoLED ECOdrive 1%, 0-10v Linear
<b>ES1</b>	eldoLED SOLOdrive 0-10v, 0.1% Logarithmic
<b>ES2</b>	eldoLED SOLOdrive 0-10v, 0.1% Linear

### DALI Drivers

<b>EE3</b>	eldoLED ECOdrive 1%, DALI (logarithmic)
<b>ES3</b>	eldoLED SOLOdrive 0.1%, DALI (logarithmic)
<b>OD1</b>	eldoLED Optotronic 1%, DEXAL
<b>OD2</b>	eldoLED Optotronic 1%, DALI 2 Channel

### Lutron Drivers

<b>LH1</b>	Lutron Hi-lume Soft-on, Fade-to-black 1%, EcoSystem, LDE1
<b>LH4</b>	Lutron Hi-Lume 1%, 2-wire, Lutron-LTEA2W, 120v only

### Alternate Drivers

<b>PS1</b>	Signify Advance Xitanium Step Dimming 50%/100%
<b>EH1</b>	ELV 120v only, 0-10v universal

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



## How to specify Circuiting, Battery and Emergency

1

- Select fixture circuiting from options below
- Some EX3DIWW configurations will not accommodate all circuiting options, consult with factory

### Circuiting

<b>1</b>	Single Circuit
<b>2</b>	Dual Circuit
<b>M</b>	Multi Circuit
<b>E</b>	Emergency Circuit only
<b>N</b>	Night Light Circuit only

2

+

3

- Battery and emergency section options are available in addition to fixture circuit
- Select battery and emergency section options below; factory shop drawing required
- Some EX3DIWW configurations will not accommodate all circuiting options, consult with factory

### Battery and/or Emergency If Required

**0** No battery or specific emergency section required

#### Battery

- Select battery section type if required, indicate total QTY. *Example 2P*
- 90 minute battery runtime; test button is remote to fixture and requires an additional drop
- No battery option available for 2' lengths
- Entire direct fixture housing is on battery for lengths up to 5'
- Half of direct fixture is on battery for 6' or 8' housing lengths
- For more battery options available, see Pinnacle Resource Guide

<b>0</b>	No Battery
<b>_FSB</b>	Factory Select Battery (10w option)
<b>_FSBST</b>	Factory Select Battery (10w, Self Testing)
<b>_IC</b>	Iota 10w Integral
<b>_ILL</b>	Iota 10w Integral Lithium, Self Testing
<b>_IRH</b>	Iota 20w Remote
<b>_P</b>	Bodine 10w Integral
<b>_PLL</b>	Bodine 10w Integral Lithium, Self Testing
<b>_PRH</b>	Bodine 20w Remote

#### For Approximate Battery Lumen Output

- Multiply battery wattage X fixture LPW shown on Lumen Table
- 92.3 (LPW) x 10 (watts) = 923 battery lumen output

#### Emergency

- Select emergency section type if required, indicate total QTY. *Example 1E*
- Combine battery and emergency section ordering codes if both options are selected

<b>_FSG</b>	Factory Select Automatic Load Control Relay (ALCR), UNV
<b>_GI</b>	Emergency Transfer Switch (ETS) DR Emergency Control Device, UNV
<b>_GB</b>	Bodine GTD, Generator Transfer Device, 120v or 277v
<b>_E</b>	Emergency circuit section
<b>_N</b>	Night Light circuit section
<b>_L</b>	Life Safety circuit section NO THROUGH WIRE

#### Battery OR Emergency Ordering Examples

- Single circuit, 10w Integral Battery      Ordering Code: 1-1P
- Emergency only, 10w Integral Battery      Ordering Code: E-1P
- Single circuit, GTD required      Ordering Code: 1-1G

#### Combination Section Ordering Examples

- Single circuit, (1) 10w battery, (1) emergency section      Ordering Code: 1-1P1E
- Multi circuit, (2) 10w battery, (2) emergency sections      Ordering Code: M-2P2E
- Single circuit, (1) night light section      Ordering Code: 1-1N

#### Finish

- Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes
- Selecting a fixture finish other than white may impact lumen output; consult factory for more information

<b>W</b>	White ( <i>white cord/white canopy</i> )
<b>S</b>	Metallic Silver ( <i>grey cord/silver canopy</i> )
<b>BL</b>	Textured Black ( <i>black cord/black canopy</i> )
<b>BR</b>	Bronze ( <i>white cord/bronze canopy</i> )
<b>GR</b>	Graphite ( <i>white cord/graphite canopy</i> )
<b>CC</b>	Custom Color ( <i>white cord/color match canopy</i> )

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



## Fixture Options

- Additional options to enhance the fixture and finish of the product

**DSP** Customer Supplied Battery/Driver/Sensor


## Controls

- Pinnacle is able to accommodate different control solutions from different manufacturers. Consult Factory for more information.

## Photometrics

### Wall Wash - Open

Test # SCALED FROM KPL2015-7 & KPL2015-47  
Catalog # EX3DI-WW-HE-840VHO-840VHO-4  
Lumens 8163  
Watts 87  
Efficacy 93.8



### Candela Distribution

Vert Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	2101	2101	2101	2101	2101
5	2684	2617	2513	2345	2111
15	3116	3086	2999	2658	2036
25	2241	2353	2652	2640	1886
35	1377	1484	1847	2237	1638
45	815	882	1150	1584	1288
55	538	560	681	981	855
65	423	413	423	534	439
75	372	355	321	281	155
85	312	292	239	158	37
90	0	0	0	0	0
100	107	237	278	146	105
110	540	525	446	333	301
120	756	712	659	579	563
130	957	933	885	839	814
140	1211	1213	1121	1022	994
150	1378	1326	1230	1168	1148
160	1369	1340	1298	1275	1263
170	1355	1347	1336	1337	1333
180	1347	1347	1347	1347	1347

### Luminance Data (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	38711	54665	61218
55	31528	39880	50105
65	33627	33599	34869
75	48292	41724	20148
85	120282	92100	14162

For all available IES files, please visit our website at [pinnacle-ltg.com](http://pinnacle-ltg.com). Photometry testing in accordance to IESNA-LM-79-08 at an NVLAP accredited testing laboratory. Testing conducted at 25°C ambient conditions

## Applications & Certificates

**Construction:** 6063-T5 Extruded aluminum housing. Highly reflective die-formed white painted reflector.

**Shielding:** Extruded aluminum module with miro reflector for perfect wall wash illumination. Diffuse snap-in acrylic lens, removable for maintenance. Clear dust guard offered standard with fixture.

**Mounting:** Aircraft cable and wall mount available. Select from 2 aircraft cable options. Select the straight aircraft cable that mounts on 4'-0" (1219.2mm) and 8'-0" (2438.4mm) centers or the moveable adjustable Y-cable mount. The Y-Cable design allows for adjustable mounting locations. Aircraft Cable supplied with 5" (127mm) power and 2" (50.8mm) non-power canopies. Refer to installation instructions for appropriate ceiling detail. Canopies are painted white unless otherwise specified. Maximum fixture weight is 25 lbs for a standard 4' fixture..

**LED:** 25°C test environment. Lumen output/wattage has a margin of +/- 5%; 2' or 3' lengths may have a greater wattage deviation. Luminaire configurations tested in accordance with IES LM-79. Diodes tested in accordance with IES LM-80. Lifetime calculated using IES TM-21. Minimum lifetime greater than 60,000 hours. Lifetime Projection L70 = 275,000 hours and L90 = 83,000 hours. MacAdam 3-Step Ellipses. For all available IES files, please visit our website at [pinnacle-ltg.com](http://pinnacle-ltg.com).

**CRI, CCT & Lumen Output:** Not all lumen packages available. Three lumen packages available. Standard, High (HO) and Very High (VHO). Custom outputs are available. Specify custom lumens or watts between standard offering listed on CRI, CCT & Output page. 80 CRI is available for 3000K, 3500K, and 4000K. 90 CRI is available for 2700K, 3000K, 3500K and 4000K. 90 CRI = R9≥50.

**Voltage:** Universal (U), 120 volt (1), 277 volt (2) and 347 volt (3) options available. Must specify PL4 or OL4 in Driver section when 347 volt (3) is selected. Some EDGE configurations will not accommodate all voltage options; consult with factory.

**Driver:** Standard Driver Option is Factory Select Driver 0-10V, 1% = FSD. Electronic driver, Power factor is >0.9 with a THD <20%. Driver Lifetime: 50,000 hours at 25°C ambient operating conditions. Ambient operating range: -20°F/-30°C to 115°F/46°C. For more driver options, see Pinnacle Resource Guide. Some EDGE configurations will not accommodate all driver options.

**Circuiting:** Select from single circuit (1), dual circuit (2), Multi circuit (M), Emergency circuit (E) or Night Light circuit (N). For emergency circuiting situations that require no through wire or circuit separation, Life Safety Circuit should be selected. This will provide a separate power feed and only the Life Safety Circuit in that section. Some EX configurations will not accommodate all circuiting options; consult with factory.

**Battery & Emergency:** Select battery or emergency options if required. If battery or emergency option is not required, enter 0. Battery duration is 90 minutes as standard. Test button is remote to fixture. For more Battery options, see Pinnacle Resource Guide.

**Finish:** Standard powder-coat textured white, metallic silver, graphite, textured black or bronze painted finish; consult factory for chip of standard paint finishes. Canopies painted white unless specified differently in the options section of the part number. Contact factory for additional custom color and finish options.

**Labels:** UL and cUL Listed. All lumen packages are approved for dry/damp location unless otherwise noted.

**Fixture Weight:** Maximum fixture weight is 25 lbs for a standard 4' fixture.

**Buy American Act Compliant**

**Warranty:** EDGE LED offered with a 5-year limited warranty. Covers LED, driver and fixture.