

EDGE EX3DIWW

3" Suspended Direct/Indirect Linear Wall Wash

Key Features

- 6063-T5 Extruded aluminum housing
- Extruded aluminum module with micro reflector for perfect wall washing illumination
- Room-Side Maintenance for LED system
- 5-year limited warranty covers LED, driver and fixture
- UL and cUL listed
- Approved for dry/damp location unless otherwise noted
- Maximum weight is 25 lbs. for a standard 4' fixture
- Buy American Act compliant
- Product transparency with third-party verified Living Building Challenge (LBC) Declared



Declare.



Example Part #: EX3DI-WW-HE-830HO-830-26'-AC48G1-U-FSD-1-0-W

EX3DI-WW

DIRECT SHIELDING - INDIRECT SHIELDING - DIRECT OUTPUT - INDIRECT OUTPUT - LENGTH OR PATTERN - MOUNTING - VOLTAGE - DRIVER - CIRCUITING - BATTERY & EMERGENCY - FINISH - FIXTURE OPTIONS

WW	---	-----	-----
DIRECT SHIELDING	INDIRECT SHIELDING	DIRECT CRI, CCT & OUTPUT	INDIRECT CRI, CCT & OUTPUT
WW - Wall Wash <i>Shielding pg. 2</i>	HE - High Efficiency BW - Batwing WHE - Asymmetric HEA - Ascent <i>Shielding pg. 2</i>	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K CL - Custom Lumens CW - Custom Watts <i>Lumen Output pg. 2</i>	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K CL - Custom Lumens CW - Custom Watts <i>Lumen Output pg. 2</i>
LENGTH ¹	MOUNTING ²	VOLTAGE	DRIVER
__ - Individual Fixture --- - Continuous Row <i>Length pg. 3</i>	_AC_G_ - (M)AC to Grid _AC_JB_ - (M)AC to J Box _AC_ST_ - (M)AC to Structure _AC5_G_ - 5" Non-Power Canopy _AC5_JB_ - 5" Non-Power Canopy _SQ_G_ - 5" Square Canopy _SQ_JB_ - 5" Square Canopy <i>Mounting pg. 3</i>	U - Universal <i>(120 thru 277V)</i> 1 - 120V 2 - 277V 3 - 347V <i>Voltage pg. 4</i>	FSD - Factory Select Driver (1%, 0-10v) PL2 - Advance Xitanium (1%, 0-10v) PL4 - Advance Xitanium 347V (1%, 0-10v) EE1 - eldoLED ECOdrive (1%, 0-10v) ES1 - eldoLED SOLOdrive (0.1%, 0-10v) LH1 - Lutron Hi-lume (1%, EcoSystem) PS1 - Advance Xitanium (50%/100%) OL2 - eldoLED Optotronic (1%, 0-10v) <i>Driver pg. 4</i>
CIRCUITING	BATTERY & EMERGENCY ³	FINISH	FIXTURE OPTIONS
1 - Single Circuit 2 - Dual Circuit M - Multi Circuit E - Emergency <i>(entire fixture)</i> N - Night Light <i>(entire fixture)</i> <i>Circuiting pg. 5</i>	0 - None _FSG - Factory Select ALCR _FSB - Factory Select Battery _GI - Iota ETS DR _GB - Bodine GTD _PLL - Bodine 10W Integral _ILL - Iota 10W Integral _E - Emergency Circuit Section _N - Night Light Circuit Section _L - Life Safety Circuit Section <i>Battery and Emergency pg. 5</i>	W - White S - Metallic Silver BL - Textured Black BR - Bronze GR - Graphite CC - Custom Color <i>Finish pg. 5</i>	DSP - Customer Supplied Battery/Driver/ Sensor <i>Fixture Options pg. 5</i>






1. When specifying SOURCE the first _ is for specifying either 8 - 80CRI, or 9 - 90CRI. The ending __ are for specifying output, example HO - High Output. 2. Individual fixtures come in 2', 3', 4', 5', 6', 7' & 8' lengths. Continuous row come in 1/8" increments. 3. Specify AC Cable: Standard single AC = AC or Movable AC = MAC; Specify AC length standard AC is 48"; Specify grid: G1=15/16", G9=9/16", GS=Screw Slot. Example: AC48G1. 4. Enter quantity for Battery and Emergency, Example 2P.

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



Direct Shielding

Indirect Shielding

WW	HE	BW	WHE	HEA
Wall Wash	High Efficiency	Batwing	Asymmetric	Ascent <i>(No MAC mounting foot lengths only)</i>
				

Direct Output

- Specify either 80 or 90 CRI
- Longer lead-time may apply for 90 CRI. Consult factory.
- 90 CRI = R9≥50

Custom Output- Lumens OR Wattage

CL _____	Specify CRI, CCT and desired lumens (i.e. CL835400)	<i>Max Lumens: 1074lm/ft. Max lumens dependent on color temp. Consult factory for more information</i>
CW _____	Specify CRI, CCT and desired wattage (i.e. CW9407)	<i>Max Watts: 14.8 watts/ft. Consult factory for more information.</i>

Direct 80 CRI

	Color	Lumens <i>per foot</i>	Shielding	
			WW Wall Wash <i>LPW</i>	<i>Watts/ft</i>
830	3000K	500	69	7.2
830HO	3000K	750	68	11.1
830VHO	3000K	N/A		
835	3500K	500	73	6.8
835HO	3500K	750	72	10.4
835VHO	3500K	1000	70	14.4
840	4000K	500	76	6.5
840HO	4000K	750	75	10.0
840VHO	4000K	1000	73	13.8

Direct 90 CRI

927	2700K	500	57	8.8
927HO	2700K	750	55	13.7
927VHO	2700K	N/A		
930	3000K	500	62	8.0
930HO	3000K	750	61	12.3
930VHO	3000K	N/A		
935	3500K	500	65	7.7
935HO	3500K	750	64	11.8
935VHO	3500K	N/A		
940	4000K	500	63	8.0
940HO	4000K	750	61	12.3
940VHO	4000K	N/A		

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



Indirect Output

Custom Output - Lumens OR Wattage

CL _____	Specify CRI, CCT and desired lumens (i.e. CL835500)	<i>Max Lumens: HE = 1,968, BW = 1,837, WHE = 1,619, HEA = 1,704. Max lumens dependent on color temp.</i>
CW _____	Specify CRI, CCT and desired wattage (i.e. CW9407)	<i>Max Watts: 13.4 watts/ft. Consult factory for more information.</i>

Indirect 80 CRI

	Color	Lumens per foot	Shielding ¹							
			HE High Efficiency		BW Batwing		WHE Asymmetric		HEA Ascent	
			LPW	Watts/ft	LPW	Watts/ft	LPW	Watts/ft	LPW	Watts/ft
830	3000K	500	140	3.6	131	3.8	119	4.2	125	4.0
830HO	3000K	750	146	5.1	135	5.5	119	6.3	125	6.0
830VHO	3000K	1000	147	6.8	137	7.3	122	8.2	128	7.8
835	3500K	500	145	3.4	135	3.7	123	4.1	125	4.0
835HO	3500K	750	151	5.0	141	5.3	122	6.1	129	5.8
835VHO	3500K	1000	148	6.8	141	7.1	126	8.0	133	7.5
840	4000K	500	145	3.4	135	3.7	123	4.1	125	4.0
840HO	4000K	750	151	5.0	141	5.3	122	6.1	129	5.8
840VHO	4000K	1000	148	6.8	141	7.1	126	8.0	133	7.5

Indirect 90 CRI

927	2700K	500	118	4.2	110	4.5	99	5.1	102	4.9
927HO	2700K	750	118	6.4	110	6.8	98	7.6	104	7.2
927VHO	2700K	1000	121	8.3	113	8.9	100	10.0	105	9.5
930	3000K	500	124	4.0	120	4.2	105	4.7	111	4.5
930HO	3000K	750	129	5.8	120	6.3	107	7.0	111	6.8
930VHO	3000K	1000	132	7.6	123	8.2	108	9.3	114	8.8
935	3500K	500	124	4.0	120	4.2	105	4.8	111	4.5
935HO	3500K	750	128	5.8	119	6.3	107	7.0	110	6.8
935VHO	3500K	1000	132	7.6	122	8.2	107	9.3	113	8.8
940	4000K	500	124	4.0	120	4.2	105	4.8	111	4.5
940HO	4000K	750	128	5.8	119	6.3	107	7.0	110	6.8
940VHO	4000K	1000	132	7.6	122	8.2	107	9.3	113	8.8

Length

- All individual units cannot be joined, end plates are factory installed and cannot be removed
- For continuous runs, add 1/4" (6.4mm) for each end plate or 1/2" (12.7mm) to the overall length of the row

2	3	4	5	6	7	8	—
Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Cont. Run Specify nominal overall row length to the 1'
24" (609.6mm)	36" (914.4mm)	48" (1219.2mm)	60" (1524mm)	72" (1828.8mm)	84" (2133.6mm)	96" (2438.4mm)	
Specify to the 1' >>>							

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.




Mounting

- Specify cable length in ordering code (AC48G1)
- Standard specifiable lengths are 48", 120", 240" and 350"
- End plates and power cord attached at factory
- Aircraft cable (AC) mounts on 4' (1219.2mm) and 8' (2438.4mm) centers
- Maximum movable mounting locations are 12" from end of 4' fixture and 18" from end of 8' fixture
- Aircraft Cable supplied with 5" (127mm) power and 2" (50.8mm) non-power canopies

- Canopies and pendants match fixture finish, power cords are white, grey, or black depending on fixture finish. See Finish section for additional details
- Approved for dry/damp location unless otherwise noted
- Refer to installation instructions during installation at the job site
- Maximum fixture weight is 25 lbs for a standard 4' fixture
- AC_GS and MAC_GS - works with screw slot and bolt slot grid ceiling types
- Designed to be 12"-18" away from wall for optimal performance

AC_G1	Aircraft Cable 1" (15/16") T-Bar
AC_G9	Aircraft Cable 9/16" T-Bar
AC_GS	Aircraft Cable Screw Slot T-Bar
AC_JB	Aircraft Cable Junction Box
AC_ST	Aircraft Cable Structure
AC5_G	Aircraft Cable 5" (127mm) Non-Power Canopy
AC5_JB	Aircraft Cable 5" (127mm) Non-Power Canopy
SQ_G	Aircraft Cable 5" (127mm) Square Canopy
SQ_JB	Aircraft Cable 5" (127mm) Square Canopy
MAC_G1	Moveable AC 1" (15/16") T-Bar
MAC_G9	Moveable AC 9/16" T-Bar
MAC_GS	Moveable AC Screw Slot T-Bar
MAC_JB	Moveable AC Junction Box
MAC_ST	Moveable AC Structure
MAC5_G	Moveable AC 5" (127mm) Non-Power Canopy
MAC5_JB	Moveable AC 5" (127mm) Non-Power Canopy
MSQ_G	Moveable AC 5" (127mm) Square Canopy
MSQ_JB	Moveable AC 5" (127mm) Square Canopy

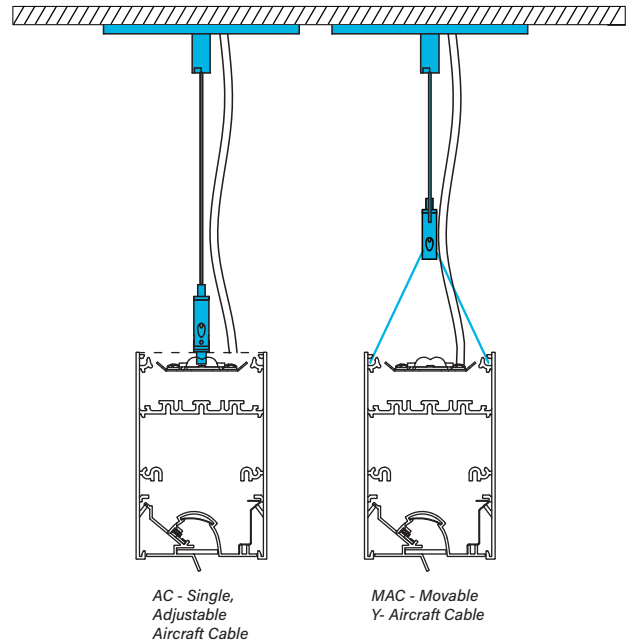

Voltage

- Some EX3DIWW configurations will not accommodate all voltage options; consult with factory

U	Universal
1	120 volt
2	277 volt
3	347 volt

Driver

- Standard Driver Option = FSD
- Driver Lifetime: 50,000 hours at 25°C ambient operating conditions
- For more driver options see Pinnacle Resource Guide
- Some EX3DIWW configurations will not accommodate all driver options; consult with factory

0-10V Drivers	
FSD	Factory Select Driver 1%, 0-10v
PL2	Signify Advance Xitanium 1%, 0-10v
PL4	Advance Xitanium 347v 1%, 0-10v, requires 347v
OL2	eldoLED Optotronic, 1%, 0-10v
OL4	eldoLED Optotronic 347v, 1% 0-10v, requires 347v option
EE1	eldoLED ECOdrive 1%, 0-10v Logarithmic
EE2	eldoLED ECOdrive 1%, 0-10v Linear
ES1	eldoLED SOLOdrive 0-10v, 0.1% Logarithmic
ES2	eldoLED SOLOdrive 0-10v, 0.1% Linear
DALI Drivers	
EE3	eldoLED ECOdrive 1%, DALI (logarithmic)
ES3	eldoLED SOLOdrive 0.1%, DALI (logarithmic)
OD1	eldoLED Optotronic 1%, DEXAL
OD2	eldoLED Optotronic 1%, DALI 2 Channel
Lutron Drivers	
LH1	Lutron Hi-lume Soft-on, Fade-to-black 1%, EcoSystem, LDE1
LH4	Lutron Hi-Lume 1%, 2-wire, Lutron-LTEA2W, 120v only
Alternate Drivers	
PS1	Signify Advance Xitanium Step Dimming 50%/100%
EH1	ELV 120v only, 0-10v universal

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568

EX3DIWW_LED_SPEC_NOV2024



How to specify Circuiting, Battery and Emergency

- 1**
- Select fixture circuiting from options below
 - Some EX3DIWW configurations will not accommodate all circuiting options, consult with factory

Circuiting

1	Single Circuit
2	Dual Circuit
M	Multi Circuit
E	Emergency Circuit only
N	Night Light Circuit only

- 2** + **3**
- Battery and emergency section options are available in addition to fixture circuit
 - Select battery and emergency section options below; factory shop drawing required
 - Some EX3DIWW configurations will not accommodate all circuiting options, consult with factory

Battery and/or Emergency *If Required*

- 0** No battery or specific emergency section required

Battery

- Select battery section type if required, indicate total QTY. *Example 2P*
- 90 minute battery runtime; test button is remote to fixture and requires an additional drop
- No battery option available for 2' lengths
- Entire direct fixture housing is on battery for lengths up to 5'
- Half of direct fixture is on battery for 6' or 8' housing lengths
- For more battery options available, see Pinnacle Resource Guide

0	No Battery
_FSB	Factory Select Battery (10w option)
_FSBST	Factory Select Battery (10w, Self Testing)
_IC	Iota 10w Integral
_ILL	Iota 10w Integral Lithium, Self Testing
_IRH	Iota 20w Remote
_P	Bodine 10w Integral
_PLL	Bodine 10w Integral Lithium, Self Testing
_PRH	Bodine 20w Remote

For Approximate Battery Lumen Output

- Multiply battery wattage X fixture LPW shown on Lumen Table
- 92.3 (LPW) x 10 (watts) = 923 battery lumen output

Emergency

- Select emergency section type if required, indicate total QTY. *Example 1E*
- Combine battery and emergency section ordering codes if both options are selected

_FSG	Factory Select Automatic Load Control Relay (ALCR), UNV
_GI	Emergency Transfer Switch (ETS) DR Emergency Control Device, UNV
_GB	Bodine GTD, Generator Transfer Device, 120v or 277v
_E	Emergency circuit section
_N	Night Light circuit section
_L	Life Safety circuit section NO THROUGH WIRE

Battery OR Emergency Ordering Examples

- Single circuit, 10w Integral Battery Ordering Code: 1-1P
- Emergency only, 10w Integral Battery Ordering Code: E-1P
- Single circuit, GTD required Ordering Code: 1-1G

Combination Section Ordering Examples

- Single circuit, (1) 10w battery, (1) emergency section Ordering Code: 1-1P1E
- Multi circuit, (2) 10w battery, (2) emergency sections Ordering Code: M-2P2E
- Single circuit, (1) night light section Ordering Code: 1-1N

Finish

- Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes
- Selecting a fixture finish other than white may impact lumen output; consult factory for more information

W	White (<i>white cord/white canopy</i>)
S	Metallic Silver (<i>grey cord/silver canopy</i>)
BL	Textured Black (<i>black cord/black canopy</i>)
BR	Bronze (<i>white cord/bronze canopy</i>)
GR	Graphite (<i>white cord/graphite canopy</i>)
CC	Custom Color (<i>white cord/color match canopy</i>)

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



Fixture Options

- Additional options to enhance the fixture and finish of the product

DSP Customer Supplied Battery/Driver/Sensor


Controls

- Pinnacle is able to accommodate different control solutions from different manufacturers. Consult Factory for more information.

Photometrics

Wall Wash - Open

Test #	SCALED FROM KPL2015-7 & KPL2015-47
Catalog #	EX3DI-WW-HE-840VHO-840VHO-4
Lumens	8163
Watts	87
Efficacy	93.8



Candela Distribution

Vert Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	2101	2101	2101	2101	2101
5	2684	2617	2513	2345	2111
15	3116	3086	2999	2658	2036
25	2241	2353	2652	2640	1886
35	1377	1484	1847	2237	1638
45	815	882	1150	1584	1288
55	538	560	681	981	855
65	423	413	423	534	439
75	372	355	321	281	155
85	312	292	239	158	37
90	0	0	0	0	0
100	107	237	278	146	105
110	540	525	446	333	301
120	756	712	659	579	563
130	957	933	885	839	814
140	1211	1213	1121	1022	994
150	1378	1326	1230	1168	1148
160	1369	1340	1298	1275	1263
170	1355	1347	1336	1337	1333
180	1347	1347	1347	1347	1347

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	38711	54665	61218
55	31528	39880	50105
65	33627	33599	34869
75	48292	41724	20148
85	120282	92100	14162

For all available IES files, please visit our website at pinnacle-ltg.com. Photometry testing in accordance to IESNA-LM-79-08 at an NVLAP accredited testing laboratory. Testing conducted at 25°C ambient conditions

Applications & Certificates

Construction: 6063-T5 Extruded aluminum housing. Highly reflective die-formed white painted reflector.

Shielding: Extruded aluminum module with miro reflector for perfect wall wash illumination. Diffuse snap-in acrylic lens, removable for maintenance. Clear dust guard offered standard with fixture.

Mounting: Aircraft cable and wall mount available. Select from 2 aircraft cable options. Select the straight aircraft cable that mounts on 4'-0" (1219.2mm) and 8'-0" (2438.4mm) centers or the moveable adjustable Y-cable mount. The Y-Cable design allows for adjustable mounting locations. Aircraft Cable supplied with 5" (127mm) power and 2" (50.8mm) non-power canopies. Refer to installation instructions for appropriate ceiling detail. Canopies are painted white unless otherwise specified. Maximum fixture weight is 25 lbs for a standard 4' fixture..

LED: 25°C test environment. Lumen output/wattage has a margin of +/- 5%; 2' or 3' lengths may have a greater wattage deviation. Luminaire configurations tested in accordance with IES LM-79. Diodes tested in accordance with IES LM-80. Lifetime calculated using IES TM-21. Minimum lifetime greater than 60,000 hours. Lifetime Projection L70 = 275,000 hours and L90 = 83,000 hours. MacAdam 3-Step Ellipses. For all available IES files, please visit our website at pinnacle-ltg.com.

CRI, CCT & Lumen Output: Not all lumen packages available. Three lumen packages available. Standard, High (HO) and Very High (VHO). Custom outputs are available. Specify custom lumens or watts between standard offering listed on CRI, CCT & Output page. 80 CRI is available for 3000K, 3500K, and 4000K. 90 CRI is available for 2700K, 3000K, 3500K and 4000K. 90 CRI = R9≥50.

Voltage: Universal (U), 120 volt (1), 277 volt (2) and 347 volt (3) options available. Must specify PL4 or OL4 in Driver section when 347 volt (3) is selected. Some EDGE configurations will not accommodate all voltage options; consult with factory.

Driver: Standard Driver Option is Factory Select Driver 0-10V, 1% = FSD. Electronic driver, Power factor is >0.9 with a THD <20%. Driver Lifetime: 50,000 hours at 25°C ambient

operating conditions. Ambient operating range: -20°F/-30°C to 115°F/46C. For more driver options, see Pinnacle Resource Guide. Some EDGE configurations will not accommodate all driver options.

Circuiting: Select from single circuit (1), dual circuit (2), Multi circuit (M), Emergency circuit (E) or Night Light circuit (N). For emergency circuiting situations that require no through wire or circuit separation, Life Safety Circuit should be selected. This will provide a separate power feed and only the Life Safety Circuit in that section. Some EX configurations will not accommodate all circuiting options; consult with factory.

Battery & Emergency: Select battery or emergency options if required. If battery or emergency option is not required, enter 0. Battery duration is 90 minutes as standard. Test button is remote to fixture. For more Battery options, see Pinnacle Resource Guide.

Finish: Standard powder-coat textured white, metallic silver, graphite, textured black or bronze painted finish; consult factory for chip of standard paint finishes. Canopies painted white unless specified differently in the options section of the part number. Contact factory for additional custom color and finish options.

Labels: UL and cUL Listed. All lumen packages are approved for dry/damp location unless otherwise noted.

Sustainability: All EDGE models are Living Building Challenge (LBC) Declared with third-party verification. The Declare Label from ILFI provides transparent insights into materials, sourcing, and environmental impact, promoting informed, sustainable choices that benefit both people and the planet. View the label [here](#).

Fixture Weight: Maximum fixture weight is 25 lbs for a standard 4' fixture.

Buy American Act Compliant

Warranty: EDGE LED offered with a 5-year limited warranty. Covers LED, driver and fixture.

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568

EX3DIWW_LED_SPEC_NOV2024