

# EDGE EX4D

## 4" Suspended Direct Linear

### Key Features

- 6063-T6 Extruded aluminum housing
- Room side maintenance for LED system
- 5-year limited warranty covers LED, driver and fixture
- ETL Listed conforming to UL1598 in US and CSA 250 in Canada
- Approved for dry/damp location unless otherwise noted
- Maximum weight is 20 lbs. for a standard 4' fixture
- Buy American Act compliant
- Run lengths available to an 1/8"
- Product transparency with third-party verified Living Building Challenge (LBC) Declared

QUICKSHIP



**Declare.**



Example Part #: EX4D-HE-N-830HO-26'-AC48G1-U-FSD-1-0-W


EX4D -	- N	-	-	-	-	-	-	-	-	-	-
DIRECT SHIELDING	INDIRECT SHIELDING	SOURCE	LENGTH OR PATTERN	MOUNTING	VOLTAGE	DRIVER	CIRCUITING	BATTERY & EMERGENCY	FINISH	FIXTURE OPTIONS	CONTROLS
---	N	---	---	---	---	---	---	---	---	---	---
DIRECT SHIELDING	INDIRECT SHIELDING	SOURCE <sup>1</sup>	LENGTH OR PATTERN <sup>2</sup>								
<b>A</b> - Satine Lens <sup>QS</sup> <b>AL</b> - Drop Lens <b>HE</b> - High Efficiency <sup>QS</sup> <b>BW</b> - Batwing <sup>QS</sup> <b>WHE</b> - Asymmetric <sup>QS</sup> <b>HED</b> - Descent Shielding pg. 2	<b>N</b> - None Shielding pg. 2	<b>27</b> - 2700K <b>30</b> - 3000K <b>35</b> - 3500K <b>40</b> - 4000K <b>CL</b> - Custom Lumens <b>CW</b> - Custom Watts <b>MOD</b> - Mod options available Lumen Output pg. 2	<b>---</b> - Individual Fixture <sup>QS</sup> <b>---</b> - Continuous Row <sup>QS</sup> <b>S</b> - Square <sup>QS</sup> <b>R_x</b> - Rectangle <sup>QS</sup> <b>L_x</b> - L Shape <sup>QS</sup> <b>U_x</b> - U-Shape <b>T_x</b> - T-Shape <b>X_x_x</b> - X-Shape <b>MOD</b> - Mod options available Length and Pattern pg. 3								
MOUNTING <sup>3</sup>	VOLTAGE	DRIVER	CIRCUITING								
<b>AC_G</b> - (M)AC to Grid <sup>QS</sup> <b>AC_JB</b> - (M)AC to J Box <sup>QS</sup> <b>AC_ST</b> - (M)AC to Structure <sup>QS</sup> <b>AC5_G</b> - 5" Non-Power Canopy <b>AC5_JB</b> - 5" Non-Power Canopy <b>SQ_G</b> - 5" Square Canopy <b>SQ_JB</b> - 5" Square Canopy <b>WA</b> - Wall Mount <sup>QS</sup> <b>S</b> - Surface Mount <sup>QS</sup> <b>MOD</b> - Mod options available mounting pg. 4	<b>U</b> - Universal (120 thru 277V) <sup>QS</sup> <b>1</b> - 120V <sup>QS</sup> <b>2</b> - 277V <sup>QS</sup> <b>3</b> - 347V Voltage pg. 4	<b>FSD</b> - Factory Select Driver (1%, 0-10v) <sup>QS</sup> <b>PL2</b> - Advance Xitanium (1%, 0-10v) <b>OL2</b> - eldoLED Optotronic (1%, 0-10v) <b>OL4</b> - eldoLED Optotronic 347v (1%, 0-10v) <b>EE1</b> - eldoLED ECODrive (1%, 0-10v) <b>ES1</b> - eldoLED SOLOdrive (0.1%, 0-10v) <b>LH1</b> - Lutron Hi-lume (1%, EcoSystem) <b>PR1</b> - Advance Xitanium SR <b>MOD</b> - Mod options available Driver pg. 5	<b>1</b> - Single Circuit <sup>QS</sup> <b>M</b> - Multi Circuit <b>E</b> - Emergency (entire fixture) <sup>QS</sup> <b>N</b> - Night Light (entire fixture) <sup>QS</sup> Circuiting pg. 5								
BATTERY & EMERGENCY <sup>4</sup>	FINISH	FIXTURE OPTIONS <sup>5</sup>	CONTROLS <sup>6</sup>								
<b>0</b> - None <sup>QS</sup> <b>FSB</b> - Factory Select Battery <sup>QS</sup> <b>FSG</b> - Factory Select ALCR <b>GI</b> - Iota ETS DR <b>GB</b> - Bodine GTD <b>ILL</b> - Iota 10W <b>PLL</b> - Bodine 10W <b>E</b> - Emergency Section <b>N</b> - Night Light Section <b>L</b> - Life Safety Section Battery and Emergency pg. 5-7	<b>W</b> - White <sup>QS</sup> <b>S</b> - Metallic Silver <sup>QS</sup> <b>BL</b> - Textured Black <sup>QS</sup> <b>BR</b> - Bronze <b>GR</b> - Graphite <b>CC</b> - Custom Color Finish pg. 6	<b>QS</b> - Quick Ship <sup>QS</sup> <b>TC</b> - Indirect Top Cover (ac mounting only) <b>DSP</b> - Customer Supplied Battery/Driver/Sensor <b>MOD</b> - Mod options available Fixture Options pg. 6	<b>DLMFC</b> - Wattstopper DLM (wired) <b>DLMFS</b> - Wattstopper LLC (wireless) <b>EASYS</b> - Philips EasySense (wireless) <b>SNSLM</b> - Encelium Sensillum (wireless) <b>WVLX</b> - Eaton Wavelinx (wireless) <b>VDO</b> - Lutron Vive Sensor (wireless) <b>VRF</b> - Lutron Vive Connected (wireless) <b>ENL</b> - Enlighted (wireless) <b>MOD</b> - Mod options available Controls pg. 7								

1. When specifying SOURCE the first \_ is for specifying either 8 - 80CRI, or 9 - 90CRI. The ending \_ are for specifying output, example HO - High Output. See output charts for more information. 2. Individual fixtures come in 2', 3', 4', 5', 6', 7' & 8' lengths. Continuous row come in 1/8" increments. For Mod layouts specify pattern shape and overall dimensions. Example: L6x4: L pattern that is 6'x4'. 3. Specify AC Cable: Standard single AC = AC or Movable AC = MAC; Specify AC length standard AC is 48"; Specify grid: G1=15/16", G9=9/16", GS=Screw Slot. Example: AC48G1 4. Enter quantity for Battery and Emergency, Example 2P. 5. QS must be used in fixture options section of part number to qualify. 1/8" increments not available for QS. 6. Controls can only be used with Single Circuit (1) or Emergency Circuit (E). See Controls chart on page 5 for driver options and more information.

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



## Direct Shielding

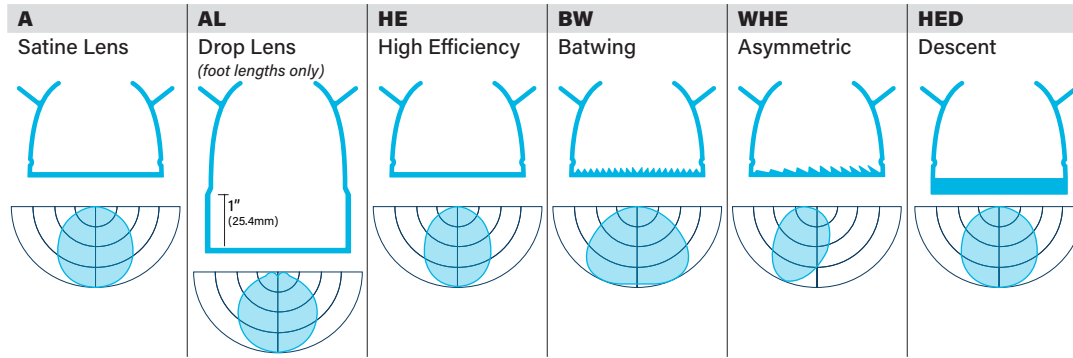

## Indirect Shielding

**N**  
None

## Source: White LED<sup>1</sup>

- Specify either 80 or 90 CRI
- Longer lead-time may apply for 90 CRI. Consult factory
- 90 CRI = R9≥50

## Custom Output - Lumens OR Wattage

**CL** \_\_\_\_\_ Specify CRI, CCT and desired lumens (i.e. CL835500) *Specify lumens between standard offering listed below. Lumens are specified per color temp*

**CW** \_\_\_\_\_ Specify CRI, CCT and desired wattage (i.e. CW9407) *Specify watts between standard offering listed below*

## 80 CRI

	Color	Lumens per foot	Shielding <sup>1</sup>											
			<b>A</b> Satine LPW		<b>AL</b> Drop LPW		<b>HE</b> High Efficiency LPW		<b>BW</b> Batwing LPW		<b>WHE</b> Asymmetric LPW		<b>HED</b> Descent LPW	
				Watts/ft		Watts/ft		Watts/ft		Watts/ft		Watts/ft		Watts/ft
<b>830SO</b>	3000K	500	108	4.6	118	4.2	123	4.1	120	4.2	124	4.0	106	4.7
<b>830HO</b>	3000K	750	110	6.8	117	6.4	128	5.9	119	6.3	123	6.1	108	6.9
<b>830VHO</b>	3000K	1000	110	9.1	120	8.3	131	7.6	122	8.2	126	7.9	109	9.2
<b>835SO</b>	3500K	500	111	4.5	122	4.1	127	3.9	123	4.1	123	4.1	110	4.6
<b>835HO</b>	3500K	750	111	6.8	121	6.2	132	5.7	123	6.1	127	5.9	112	6.7
<b>835VHO</b>	3500K	1000	114	8.8	124	8.0	133	7.5	126	7.9	131	7.7	113	8.9
<b>840SO</b>	4000K	500	111	4.5	122	4.1	127	3.9	123	4.1	123	4.1	110	4.6
<b>840HO</b>	4000K	750	111	6.8	121	6.2	132	5.7	123	6.1	127	5.9	112	6.7
<b>840VHO</b>	4000K	1000	114	8.8	124	8.0	133	7.5	126	7.9	131	7.7	113	8.9

## 90 CRI

<b>927SO</b>	2700K	500	89	5.6	98	5.1	104	4.8	99	5.0	102	4.9	88	5.7
<b>927HO</b>	2700K	750	90	8.3	99	7.6	106	7.1	99	7.6	102	7.3	89	8.4
<b>927VHO</b>	2700K	1000	90	11.1	99	10.1	106	9.4	100	10.0	104	9.7	88	11.4
<b>930SO</b>	3000K	500	97	5.1	104	4.8	113	4.4	106	4.7	109	4.6	96	5.2
<b>930HO</b>	3000K	750	99	7.6	106	7.0	113	6.6	108	6.9	112	6.7	97	7.7
<b>930VHO</b>	3000K	1000	98	10.2	107	9.4	116	8.6	108	9.2	112	8.9	97	10.3
<b>935SO</b>	3500K	500	97	5.2	104	4.8	113	4.4	105	4.7	109	4.6	96	5.2
<b>935HO</b>	3500K	750	98	7.6	106	7.1	112	6.7	108	7.0	111	6.7	97	7.7
<b>935VHO</b>	3500K	1000	98	10.2	106	9.4	116	8.6	108	9.3	112	9.0	97	10.3
<b>940SO</b>	4000K	500	97	5.2	104	4.8	113	4.4	105	4.7	109	4.6	96	5.2
<b>940HO</b>	4000K	750	98	7.6	106	7.1	112	6.7	108	7.0	111	6.7	97	7.7
<b>940VHO</b>	4000K	1000	98	10.2	106	9.4	116	8.6	108	9.3	112	9.0	97	10.3

<sup>1</sup>LPW and watts/ft based off 48" fixture size.

## Source: MOD Options

- Specify **MOD** in the part number for any of the below options
- All RGB\_ Source Options will require specific driver and control
- Consult factory for **MOD** specification details, pricing, and lead-time information

<b>MOD</b>		Required Driver	Required Control
	Color Changing RGB LED	EC1/EC4	DMX
	Color Changing RGB-W LED	EC1/EC4	DMX
	2 Channel Tunable White		

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568

EX4D\_LED\_SPEC\_MARCH2025




## Length

- For Continuous Runs, add 3/16" (4.7mm) for each end plate or 3/8" (9.5mm) to the overall length of the row

2	3	4	5	6	7	8	—
Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Cont. Run
24-3/8" (619.1mm)							Specify nominal overall row length to the 1/8" Longer lead-time may apply for lengths to the 1/8". Consult factory.
36-3/8" (934.8mm)							
48-3/8" (1228.7mm)							
60-3/8" (1533.5mm)							
72-3/8" (1838.3mm)							
84-3/8" (2143.1mm)							
96-3/8" (2447.9mm)							

Specify to the 1/8" >>>

## Pattern

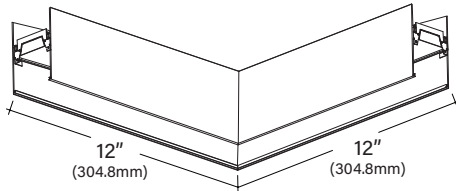


- Specify pattern shape and overall dimensions (includes corner dimensions)
- Refer to dimensions table below for available standard lengths
- All connectors are direct only
- 90 degree horizontal corners are 12"x12" (overall, outside dimension)
- Angles and shapes not shown require Mod Pattern; consult factory
- Only available with "A" or "HE" lens options

S_	R_x	U_x_x	L_x	T_x	X_x
Square Provide A dimension Example: <b>S4'</b> Minimum Length-4'x4'	Rectangle Provide Ax B dimensions Example: <b>R4'x4'</b> Minimum Length-4'x4'	U-Shape Provide Ax BxC dimensions Example: <b>U3'x4'x3'</b> Minimum Length-3'x4'x3'	L-Shape Provide Ax B dimensions Example: <b>L3'x3'</b> Minimum Length-3'x3'	T-Shape Provide Ax B dimensions Example: <b>T3'x5'</b> Minimum Length-3'x5'	X-Shape Provide Ax B dimensions Example: <b>X5'x5'</b> Minimum Length-5'x5'

## Length or Pattern: MOD Options

- Specify **MOD** in the part number for any of the below options
- Consult factory for **MOD** specification details, pricing, and lead-time information

<b>MOD</b>	Specify MOD for patterns, lengths or angles not shown above
	45- 180 degree angles
	Single-piece welded housings up to 4' x 4

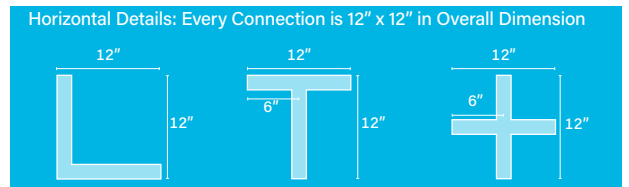




## Mounting


- Specify cable length in ordering code (AC48G1)
- Standard adjustable cable. Specify 48", 120", 240" or 350"
- End plates and power cord attached at factory
- Aircraft cable (AC) mounts on 4' (1219.2mm) and 8' (2438.4mm) centers
- Maximum recommended movable mounting locations are 12" from end of 4' fixture and 18" from end of 8' fixture
- Aircraft Cable supplied with 5" (127mm) power and 2" (50.8mm) non-power canopies

- Canopies and pendants match fixture finish, power cords are white or black depending on fixture finish. See Finish section for additional details.
- Approved for dry/damp location unless otherwise noted
- Refer to installation instructions during installation at the job site
- Maximum fixture weight is 20 lbs for a standard 4' fixture
- Top Cover is optional on AC mounting fixtures, Top Cover is standard on others

<b>AC_G1</b>	Aircraft Cable 1" (15/16") T-Bar
<b>AC_G9</b>	Aircraft Cable 9/16" T-Bar
<b>AC_GS</b>	Aircraft Cable Screw Slot T-Bar
<b>AC_JB</b>	Aircraft Cable Junction Box
<b>AC_ST</b>	Aircraft Cable Structure
<b>AC5_G</b>	Aircraft Cable 5" (127mm) Non-Power Canopy
<b>AC5_JB</b>	Aircraft Cable 5" (127mm) Non-Power Canopy
<b>SQ_G</b>	Aircraft Cable 5" (127mm) Square Canopy
<b>SQ_JB</b>	Aircraft Cable 5" (127mm) Square Canopy
<b>MAC_G1</b>	Movable AC 1" (15/16") T-Bar
<b>MAC_G9</b>	Movable AC 9/16" T-Bar
<b>MAC_GS</b>	Movable AC Screw Slot T-Bar
<b>MAC_JB</b>	Movable AC Junction Box
<b>MAC_ST</b>	Movable AC Structure
<b>MAC5_G</b>	Movable AC 5" (127mm) Non-Power Canopy
<b>MAC5_JB</b>	Movable AC 5" (127mm) Non-Power Canopy
<b>MSQ_G</b>	Movable AC 5" (127mm) Square Canopy
<b>MSQ_JB</b>	Movable AC 5" (127mm) Square Canopy
<b>WA</b>	Wall Mount
<b>S</b>	Surface Mount

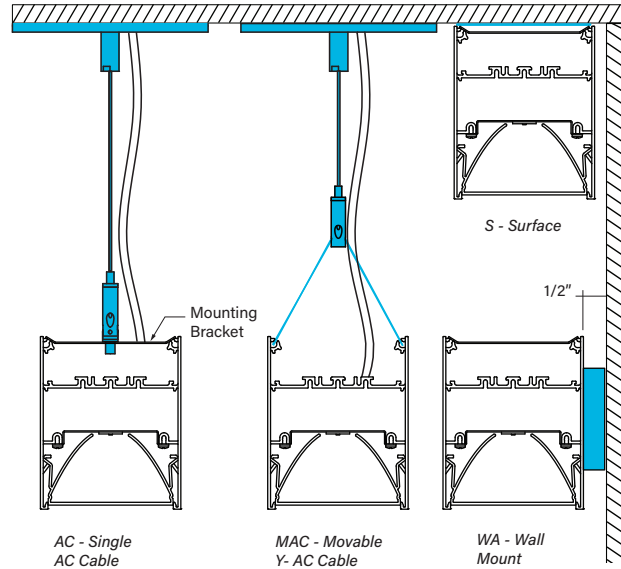

## Straight EDGE Joint System



- The Straight EDGE Joint comes standard for all runs.
- Two connection points – one to cinch fixtures together, the other to perfectly align all fixtures in a run.
- Factory-installed light shields on both sides of the fixture ensure no light leaks.
- Patented.

## Mounting: MOD Options

- Specify **MOD** in the part number for any of the below options
- Consult factory for **MOD** specification details, pricing, and lead-time information

<b>MOD</b>	Recessed to Suspended
------------	-----------------------

## Voltage

- Some EX2D configurations will not accommodate all voltage options; consult with factory

<b>U</b>	Universal
<b>1</b>	120 volt
<b>2</b>	277 volt
<b>3</b>	347 volt



## Driver

- Standard Driver Option = FSD
- Driver Lifetime: 50,000 hours at 25°C ambient operating conditions
- For more driver options see Pinnacle Resource Guide
- Some EX2D configurations will not accommodate all driver options; consult with factory

### 0-10V Drivers

<b>FSD</b>	Factory Select Driver 1%, 0-10v
<b>PL2</b>	Signify Advance Xitanium 1%, 0-10v
<b>PL4</b>	Advance Xitanium 347v 1%, 0-10v, requires 347v
<b>OL2</b>	eldoLED Optotronic, 1%, 0-10v
<b>OL4</b>	eldoLED Optotronic 347v, 1% 0-10v, requires 347v option
<b>EE1</b>	eldoLED ECOdrive 1%, 0-10v Logarithmic
<b>EE2</b>	eldoLED ECOdrive 1%, 0-10v Linear
<b>ES1</b>	eldoLED SOLOdrive 0-10v, 0.1% Logarithmic
<b>ES2</b>	eldoLED SOLOdrive 0-10v, 0% Linear
<b>OL5</b>	Advance Xitanium 1%, 0-10v, AUX, Dim to Off
<b>PL5</b>	eldoLED Optotronic 1%, 0-10v, AUX, Dim to Off

### DALI Drivers

<b>EE3</b>	eldoLED ECOdrive 1%, DALI 2, Logarithmic, DT6
<b>ES3</b>	eldoLED SOLOdrive 0.1%, DALI 2, Logarithmic, DT6
<b>OD1</b>	eldoLED Optotronic 1%, DEXAL
<b>EE4</b>	eldoLED ECOdrive 1%, DALI 2, Linear, DT6
<b>ES4</b>	eldoLED SOLOdrive 0.1%, DALI 2, Linear, DT6
<b>PR1</b>	Advance Xitanium SR, DALI 2, Self powered link

### Lutron Drivers

<b>LH1</b>	Lutron Hi-lume Soft-on, Fade-to-black 1%, EcoSystem, LDE1
------------	---

### Alternate Drivers

<b>PS1</b>	Signify Advance Xitanium Step Dimming 50%/100%
<b>EH1</b>	ELV 120v only, 0-10v universal

## Driver: MOD Options

- Specify **MOD** in the part number for any of the below options
- Consult factory for **MOD** specification details, pricing, and lead-time information

<b>MOD</b>	Power Over Ethernet
------------	---------------------

## How to Specify Circuiting, Battery and Emergency

1

- Select fixture circuiting from options below
- Some EX2D configurations will not accommodate all circuiting options, consult with factory

## Circuiting

<b>1</b>	Single Circuit
<b>M</b>	Multi Circuit
<b>E</b>	Emergency Circuit only
<b>N</b>	Night Light Circuit only

2

+

3

- Battery and emergency section options are available in addition to fixture circuit
- Select battery and emergency section options below; factory shop drawing required
- Some EX2D configurations will not accommodate all circuiting options, consult with factory

## Battery and/or Emergency If Required

<b>0</b>	No battery or specific emergency section required
----------	---



## Battery

- Select battery section type if required, indicate total QTY. *Example 2PL*
- 90 minute battery runtime; test button location dependent on configuration, consult factory
- No battery option available for 2' lengths
- Entire direct fixture housing is on battery for lengths up to 5'
- Half of direct fixture is on battery for 6' or 8' housing lengths
- For more battery options available, see Pinnacle Resource Guide

<b>0</b>	No Battery
<b>_FSB</b>	Factory Select Battery 10w, Integral Lithium
<b>_FSBST</b>	Factory Select Battery 10w, Integral Lithium, Self Testing
<b>_ILL</b>	Bodine 10w, Integral Lithium, Self Testing
<b>_PLL</b>	Iota 10w, Integral Lithium, Self Testing

### For Approximate Battery Lumen Output

- Multiply battery wattage X fixture LPW shown on Lumen Table
- 92.3 (LPW) x 10 (watts) = 923 battery lumen output

### Battery OR Emergency Ordering Examples

- Single circuit, 10w Integral Battery Ordering Code: 1-1FSB
- Emergency only, 10w Integral Battery Ordering Code: E-1PLL
- Single circuit, GTD required Ordering Code: 1-1GB

## Emergency

- Select emergency section type if required, indicate total QTY. *Example 1E*
- Combine battery and emergency section ordering codes if both options are selected

<b>_FSG</b>	Factory Select ALCR Emergency Control Device, UNV
<b>_GI</b>	Iota ETS-DR, Emergency Control Device, UNV
<b>_GB</b>	Bodine GTD, Emergency Control Device, 120v or 277v
<b>_E</b>	Emergency circuit section
<b>_N</b>	Night Light circuit section
<b>_L</b>	Life Safety circuit section NO THROUGH WIRE

## Finish


- Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes
- Selecting a fixture finish other than white may impact lumen output; consult factory for more information

<b>W</b>	White ( <i>white cord/white canopy</i> )
<b>S</b>	Metallic Silver ( <i>white cord/silver canopy</i> )
<b>BL</b>	Textured Black ( <i>black cord/black canopy</i> )
<b>BR</b>	Bronze ( <i>white cord/bronze canopy</i> )
<b>GR</b>	Graphite ( <i>white cord/graphite canopy</i> )
<b>CC</b>	Custom Color ( <i>white cord/color match canopy</i> )

## Fixture Options

- Additional options to enhance the fixture and finish of the product

<b>QS</b>	Quick Ship
<b>DSP</b>	Customer Supplied Battery/Driver/Sensor
<b>TC</b>	Indirect Top Cover ( <i>ac mounting only</i> )



\*Cross section with TC Option

## Fixture Options: MOD Options

- Specify **MOD** in the part number for any of the below options
- Consult factory for **MOD** specification details, pricing, and lead-time information

<b>MOD</b>	Remote Driver
	End Power Feed

## Quick Ship

Shielding	CRI, CCT & Output	Mounting	Voltage	Driver	Circuiting	Battery	Finish
10-Day							
A HE BW WHE	80 CRI, all color temperatures, all lumen packages See pg 2	(M)AC48G_ (M)AC to Grid (M)AC48JB (M)AC to J_BOX (M)AC48ST (M)AC to Stucture WA Wall Mount S Surface Mount	U Universal (120-277) 1 120V 2 277V	FSD Factory Select Driver (1%, 0-10v)	1 Single Circuit E Emergency N Night Light	0 None _FSB Factory Select Battery	W White S Silver BL Black

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Black QuickShip only available in 4', 6', and 8' individual lengths. Consult factory for larger projects.

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568

EX4D\_LED\_SPEC\_MARCH2025



## Controls

- Pinnacle Lighting offers easy to specify network control solutions that connect to an intelligent centralized system to maximize lighting energy efficiencies or integral sensors for individual fixture control
- Pinnacle Lighting fixtures ship technology ready; commissioning by others
- Controls can only be used with Single Circuit (1) or Emergency Circuit (E)
- Contact factory for any non-standard configurations for layout, placement, or EM options
- One drop per sensor typical, consult factory for more information

	Solution	Components	Network/Sensor	Connection	Required Drivers	Limitations
<b>DLMFC</b>	Legrand Wattstopper DLM	LMFC-011	Digital Lighting Management (DLM)	Wired, two RJ45 ports	OL2, OL4	Not available with Battery
<b>DLMFS</b>	Legrand Wattstopper LLLC	LMFS-601-W / LMFI-111	Wireless DLM Fixture Sensor	Wireless	OD1, PR1, 0-10v	0-10v requires interface
<b>EASYS</b>	Philips EasySense	SNS-210	Daylight/PIR Occupancy	Wireless to switches	PR1	Not available with 347 volt
<b>SNSLM</b>	Encelium Sensilum	EN-CLM-PIR-DD-ZB	Encelium, Daylight/PIR Occupancy	Wireless	OD1, OL1, OL2	Not available with 347 volt
<b>WLVX</b>	Eaton Wavelinx	SWPD1, NSP3IVMVDC1	WaveLinx WCL, Daylight	Wireless	Any 0-10v	Not available with 347 volt
<b>VDO</b>	Lutron Vive Sensor	DFCSJ-OEM-OCC	Vive, Daylight/PIR Occupancy	Wireless	OD1, PR1	Not available with 347 volt
<b>VRF</b>	Lutron Vive Connected	DFCSJ-OEM-RF	Vive	Wireless	OD1, PR1	Not available with 347 volt
<b>ENLI</b>	Enlighted	SU-5E-IOT, CU-4E	Enlighted, Daylight/PIR Occupancy	Wireless	Any 0-10v	Not available with 347 volt
<b>ENLC</b>	Enlighted	SU-5E-CL, CU-4E	Enlighted, Daylight/PIR Occupancy	Wireless	Any 0-10v	Not available with 347 volt

## Controls: MOD Options


- Specify **MOD** in the part number for any of the below options
- Control** Options may require specific driver. Refer to the chart below
- Consult factory for **MOD** specification details, pricing, and lead-time information

MOD	Required Driver	
	Enlighted (Wireless) - ENLI	Any 0-10v
	Enlighted (Wireless) - ENLC	Any 0-10v
	Acuity nLight Air Wireless Connected	EE6, ES6

## Photometrics

### Satine Lens

Test # ITL91449  
Catalog # EX4D-A-840VHO-4  
Lumens 4125 lm  
Watts 34.8 W  
Efficacy 118.5 LPW



### Candela Distribution

Vert Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	1446	1446	1446	1446	1446
5	1439	1440	1440	1440	1440
10	1422	1420	1423	1423	1423
15	1393	1383	1391	1392	1389
20	1347	1338	1346	1346	1344
25	1292	1280	1289	1289	1286
30	1225	1214	1222	1220	1217
35	1149	1137	1146	1141	1138
40	1062	1054	1059	1054	1052
45	969	960	963	958	954
50	865	859	860	854	852
55	756	751	750	743	744
60	641	635	633	629	626
65	522	518	516	511	511
70	399	395	392	391	391
75	276	275	275	274	275
80	161	163	164	164	166
85	67	67	69	69	69
90	0	0	0	0	0

### Luminance Data (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	11170	11101	10997
55	10744	10658	10573
65	10068	9952	9856
75	8692	8661	8661
85	6266	6453	6453

For all available IES files, please visit our website at [pinnacle-ltg.com](http://pinnacle-ltg.com). Photometry testing in accordance to IESNA-LM-79-08 at an NVLAP accredited testing laboratory. Testing conducted at 25°C ambient conditions.





## Applications & Certificates

**Construction:** 6063-T6 Extruded aluminum housing. Highly reflective steel white painted reflector.

**Shielding:** Diffuse snap-in acrylic lens, removable for maintenance.

**Mounting:** Aircraft cable and wall mount available. Select from 2 aircraft cable options. Select the straight aircraft cable that mounts on 4'-0" (1219.2mm) and 8'-0" (2438.4mm) centers or the movable adjustable Y-cable mount. The Y-Cable design allows for adjustable mounting locations. Aircraft Cable supplied with 5" (127mm) power and 2" (50.8mm) non-power canopies. Refer to installation instructions for appropriate ceiling detail. Canopies are painted white unless otherwise specified. Maximum fixture weight is 20 lbs. for a standard 4' fixture.

**White LED:** 25°C test environment. Lumen output/wattage has a margin of +/- 5%; 2' or 3' lengths may have a greater wattage deviation. Luminaire configurations tested in accordance with IES LM-79. Diodes tested in accordance with IES LM-80. Lifetime calculated using IES TM-21. Minimum lifetime greater than 60,000 hours. TM-21-21 Lifetime Rating L70 = >72,000 hours, L90 = 69,700 hours. MacAdam 3-Step Ellipses. For all available IES files, please visit our website at [pinnacle-ltg.com](http://pinnacle-ltg.com).

**Voltage:** Universal (U), 120 volt (1), 277 volt (2) and 347 volt (3) options available. Must specify PL4 or OL4 in Driver section when 347 volt (3) is selected. Some EDGE configurations will not accommodate all voltage options; consult with factory.

**Driver:** Standard Driver Option is Factory Select Driver 0-10V, 1% = FSD. Electronic driver, Power factor is >0.9 with a THD <20%. Driver Lifetime: 50,000 hours at 25°C ambient operating conditions. Ambient operating range: -20°F/-30°C to 122°F/50°C. For more driver options, see Pinnacle Resource Guide. Some EDGE configurations will not accommodate all driver options.

**Circuiting:** Select from single circuit (1), Multi circuit - For multiple circuiting and zone control, requires factory shop drawing (M), Emergency circuit (E), Life Safety (L) or Night Light circuit (N). For emergency circuiting situations that require no through wire or circuit separation, Life Safety Circuit should be selected. This will provide a separate power feed and only the Life Safety Circuit in that section. Some EDGE configurations will not accommodate all circuiting options; consult with factory.

**Battery & Emergency:** Select battery or emergency options if required. If battery or emergency option is not required, enter 0. Battery duration is 90 minutes as standard. Test button location dependant on configuration, consult factory. For more Battery options, see Pinnacle Resource Guide.

**Finish:** Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes or for additional custom color and finish options.

**Controls:** Standard options available, refer to Controls section table for available options, component part number(s), connection type, required driver and limitations. Mod options available, consult with factory.

**Labels:** UL and cUL 2108 or 1598 listed depending on product configuration. Standard, HO and VHO lumen packages are IC Rated, approved for dry/damp location unless otherwise noted.

**Sustainability:** All models are Living Building Challenge (LBC) Declared with third-party verification. The Declare Label from ILFI provides transparent insights into materials, sourcing, and environmental impact, promoting informed, sustainable choices that benefit both people and the planet. View the label [here](#).

**Fixture Weight:** Maximum fixture weight is 20lbs per 4' fixture.

### Buy American Act Compliant

**Warranty:** EDGE LED offered with a 5-year limited warranty. Covers LED, driver and fixture.