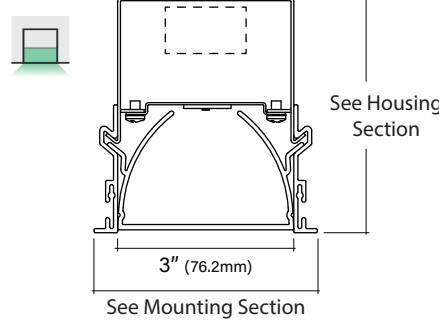




EDGE EV3DPM

3" Recessed Perimeter

Key Features

- Extruded aluminum trim with formed cold rolled 20 gauge steel back box housing
- 5-year limited warranty covers LED, driver and fixture
- UL and cUL listed, IC rated
- Approved for dry/damp location unless otherwise noted
- Room-Side Maintenance for LED system
- Product transparency with third-party verified Living Building Challenge (LBC) Declared



QUICKSHIP

Declare.



Example Part #: EV3DPM-HE-830HO-26'-G1-U-FSD-1-0-W

HOUSING	SHIELDING	SOURCE	LENGTH OR PATTERN	MOUNTING	VOLTAGE	DRIVER	CIRCUITING	BATTERY & EMERGENCY	FINISH	FIXTURE OPTIONS	CONTROLS
---------	-----------	--------	-------------------	----------	---------	--------	------------	---------------------	--------	-----------------	----------

HOUSING	SHIELDING	SOURCE ¹ <i>QS</i>	LENGTH OR PATTERN ² <i>QS</i>
EV3DPM - Edge 3, Perimeter <i>QS</i> EV3DPM2 - Edge 3, Perimeter, 2" Regress <i>QS</i> EV3DPM3 - Edge 3, Perimeter, 3" Regress <i>QS</i> EV3DPM4 - Edge 3, Perimeter, 4" Regress <i>QS</i> MOD - Modifications Available <i>Housing pg. 2</i>	A - Satine Lens <i>QS</i> HE - High Efficiency Lens <i>QS</i> R - Regress Lens WHE - Asymmetric Lens <i>QS</i> <i>Shielding pg. 2</i>	_27_ - 2700K _30_ - 3000K _35_ - 3500K _40_ - 4000K CL - Custom Lumens CW - Custom Watts MOD - Mod options available <i>Lumen Output pg. 2-3</i>	_ - Individual Fixture _ - Continuous Row SI - Inside Square SO - Outside Square RI_x - Inside Rectangle RO_x - Outside Rectangle UI_x - Inside U Shape UO_x - Outside U Shape LI_x - Inside L Shape LO_x - Outside L Shape <i>Length pg. 3</i>

MOUNTING	VOLTAGE	DRIVER	CIRCUITING
G1 - 1" (15/16") T Bar <i>QS</i> G9 - 9/16" T Bar <i>QS</i> GB - 9/16" Bevel T Bar GS - Screw Slot T Bar <i>QS</i> FL - 1/2" Flange <i>QS</i> NF - Non Flange <i>QS</i> SF - Spackle Flange <i>QS</i> MOD - Mod options available <i>Mounting pg. 4</i>	U - Universal <i>QS</i> <i>(120 thru 277V)</i> 1 - 120V <i>QS</i> 2 - 277V <i>QS</i> 3 - 347V <i>Voltage pg. 4</i>	FSD - Factory Select Driver (1%, 0-10v) <i>QS</i> PL2 - Advance Xitanium (1%, 0-10v) OL2 - eldoLED Optotronic (1%, 0-10v) OL4 - eldoLED Optotronic 347v (1%, 0-10v) EE1 - eldoLED ECODrive (1%, 0-10v) ES1 - eldoLED SOLOdrive (0.1%, 0-10v) LH1 - Lutron Hi-lume (1%, EcoSystem) PS1 - Advance Xitanium (50%/100%) MOD - Mod options available <i>Driver pg. 5</i>	1 - Single Circuit <i>QS</i> M - Multi Circuit E - Emergency <i>QS</i> <i>(entire fixture)</i> N - Night Light <i>QS</i> <i>(entire fixture)</i> <i>Circuiting pg. 5</i>

BATTERY & EMERGENCY ³	FINISH	FIXTURE OPTIONS ^{4,5}	CONTROLS ⁶
0 - None <i>QS</i> _FSB - Factory Select Battery <i>QS</i> _FSG - Factory Select ALCR _GB - Bodine GTD _GI - Iota ETS DR _ILL - Iota 10W _PLL - Bodine 10W _E - Emergency Circuit Section _N - Night Light Circuit Section _L - Life Safety Circuit Section <i>Battery and Emergency pg. 5-6</i>	W - White <i>QS</i> S - Metallic Silver BL - Textured Black BR - Bronze GR - Graphite CC - Custom Color <i>Finish pg. 6</i>	QS - Quick Ship <i>QS</i> CP - Chicago Plenum <i>QS</i> GLR - Internal Fast Blow Fuse <i>QS</i> FIL - Field Cut Illuminated Extension <i>QS</i> DSP - Customer Supplied Battery/Driver/ Sensor BA - Buy America(n) Act and/or Build America Buy America Compliant MOD - Mod options available <i>Fixture Options pg. 6</i>	MOD - Mod options available <i>Controls pg. 7</i>






¹When specifying SOURCE the first _ is for specifying either **8** - 80CRI or **9** - 90CRI. The ending _ _ are for specifying output, example **HO** - High Output. See output charts for more information. ²Individual fixtures come in **2', 3', 4', 5', 6', 7' & 8'** lengths. Continuous row come in 1/8" increments. For Patterns, specify pattern shape and overall dimensions. Example: L6x4: L pattern that is 6'x4'. ³Enter quantity for Battery and Emergency, Example 2PLL. ⁴**QS** must be used in part number when QuickShip. ⁵Compliance is configuration dependent; consult factory for confirmation. ⁶Controls can only be used with Single Circuit (1) or Emergency Circuit (E). See Controls chart on page 5 for driver options and more information.

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.








Housing

- Mounting bolt allows for adjustability of mount height. If fixture is flushed to mount bracket, distance to ceiling would be bracket height (2") + fixture height (dependent on regress).

EV3DPM	EV3DPM2	EV3DPM3	EV3DPM4	MOD EV3DPM6
Edge 3, Perimeter	Edge 3, Perimeter 2" Regress	Edge 3, Perimeter 3" Regress	Edge 3, Perimeter 4" Regress	Edge 3, Perimeter 6" Regress
				
See Mounting	See Mounting	See Mounting	See Mounting	See Mounting

Shielding

- Regress Lens option uses housing with backbox. Back box does not impact mounting. see detail.
- Asymmetric Lens option recommended for use pointing away from wall.
- Regress Lens option not available with corners.

A	HE	R	WHE	Regress Detail
Satine Lens	High Efficiency	Regress 1-1/8" regress	Asymmetric	
				

Source: White LED¹

- Specify either 80 or 90 CRI
- Longer lead-time may apply for 90 CRI. Consult factory
- 90 CRI = R9≥50

Custom Output - Lumens OR Wattage

CL _____	Specify CRI, CCT and desired lumens (i.e. CL835500)	Specify lumens between standard offering listed below. Lumens are specified per color temp
CW _____	Specify CRI, CCT and desired wattage (i.e. CW9407)	Specify watts between standard offering listed below

80 CRI

	Color	Lumens per foot	Shielding ¹		HE		R		WHE	
			A Satine LPW	Watts/ft	High Efficiency LPW	Watts/ft	Regress LPW	Watts/ft	Asymmetric LPW	Watts/ft
830	3000K	500	119	4.2	134	3.7	117	4.3	131	3.8
830HO		750	119	6.3	139	5.4	117	6.4	135	5.5
830VHO		1000	122	8.2	140	7.1	119	8.4	136	7.3
835	3500K	500	123	4.1	138	3.6	121	4.1	135	3.7
835HO		750	123	6.1	144	5.2	120	6.2	140	5.3
835VHO		1000	126	7.9	144	6.9	123	8.1	141	7.1
840	4000K	500	123	4.1	138	3.6	121	4.1	135	3.7
840HO		750	123	6.1	144	5.2	120	6.2	140	5.3
840VHO		1000	126	7.9	144	6.9	123	8.1	141	7.1

90 CRI

927	2700K	500	100.3	5.0	113	4.4	97	5.2	110	4.5
927HO		750	102.7	7.3	112	6.7	98	7.6	109	6.9
927VHO		1000	100	10.0	116	8.6	98	10.2	113	8.9
930	3000K	500	108.3	4.6	123	4.1	103	4.8	120	4.2
930HO		750	105.9	7.1	123	6.1	106	7.1	120	6.3
930VHO		1000	108	9.2	126	8.0	107	9.3	123	8.2
935	3500K	500	107.9	4.6	122	4.1	103	4.9	119	4.2
935HO		750	105.5	7.1	123	6.1	105	7.1	119	6.3
935VHO		1000	108	9.3	125	8.0	107	9.4	122	8.2
940	4000K	500	107.9	4.6	122	4.1	103	4.9	119	4.2
940HO		750	105.5	7.1	123	6.1	105	7.1	119	6.3
940VHO		1000	108	9.3	125	8.0	107	9.4	122	8.2

¹LPW and watts/ft based off 47" fixture size.

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568

EV3DPM_LED_SPEC_SEPTEMBER2025



Source: MOD Options

- Specify **MOD** in the part number for any of the below options
- All **RGB_** Source Options will require specific driver and control
- Consult factory for **MOD** specification details, pricing, and lead-time information

MOD		Required Driver	Required Control
	Color Changing RGB LED	EC1	DMX
	Color Changing RGB-W LED	EC1	DMX
	Color Changing RGB-A LED	EC1	DMX
	2 Channel Tunable White	Various	Various


Length

- All individual units cannot be joined, end trims are factory installed and cannot be removed
- Refer to Pattern section for specification and ordering options
- Continuous Rows are made up of even and odd length fixtures; designed to fall on-grid

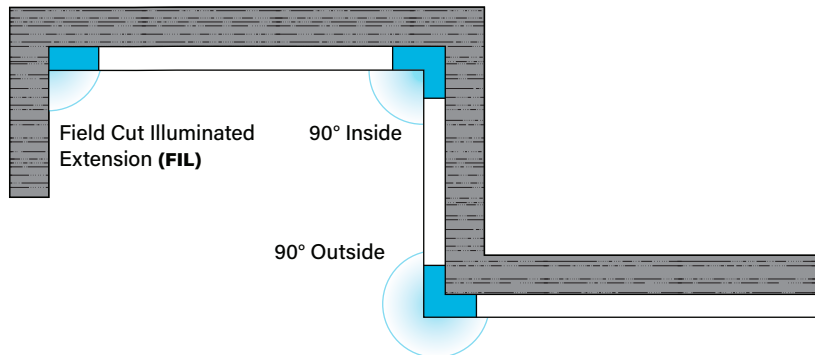
2	3	4	5	6	7	8	—
Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Cont. Run
23" (584.2mm)							Specify nominal overall row length to the 1/8"
	35" (889mm)						
		47" (1193.8mm)					
			59" (1498.6mm)				
				71" (1803.4mm)			
					83" (2108.2mm)		
						95" (2413mm)	
							Specify to the 1/8" >>>

Pattern

- Specify pattern shape and overall dimensions (includes corner dimensions)
- 90 degree horizontal corners are 12"x12" (overall, outside dimension)
- Use with Field Cut Illuminated extensions (**FIL**) to fit to wall to wall dimensions
- Not all drivers available with all patterns; consult factory
- Only available with A of HE lens



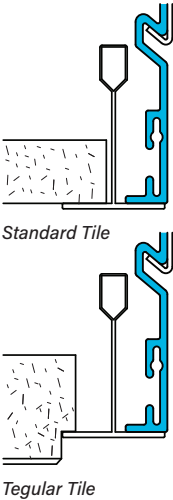
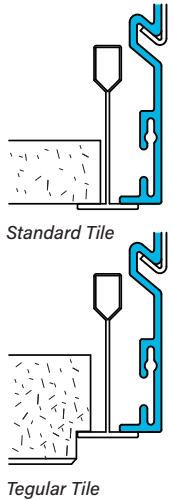
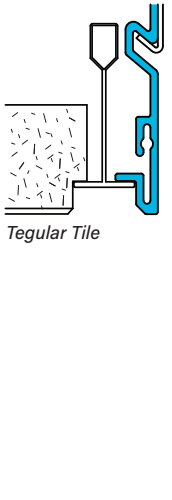
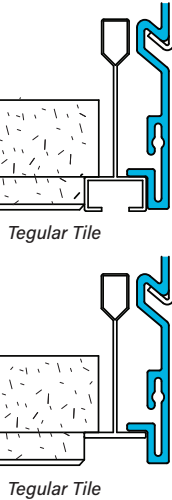
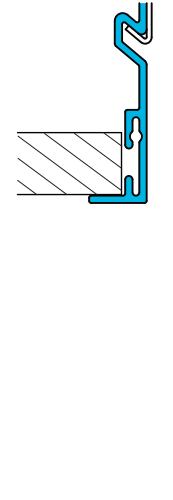
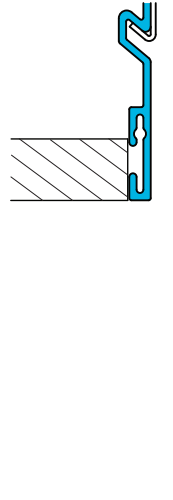
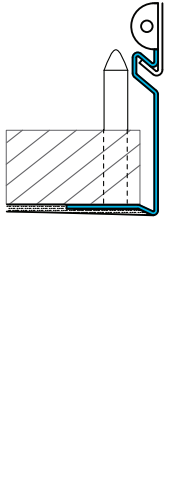
SI_	SO_	RI_x	RO_x	UI_x_x	UO_x_x	LI_x	LO_x
Square, Inside (SI) or Outside (SO) Provide overall length dimension for each fixture leg		Rectangle, Inside (RI) or Outside (RO) Provide overall length dimension for each fixture leg		U-Shape, Inside (UI) or Outside (UO) Provide overall length dimension for each fixture leg		L-Shape, Inside (LI) or Outside (LO) Provide overall length dimension for each fixture leg	





Mounting

- Individual units cannot be joined, end trims are factory installed and cannot be removed
- Designed to install into acoustical grid and inaccessible ceilings
- Grid retention brackets integral to housing and require mechanical attachment
- Each housing contains 4 grid retention brackets
- Tie off fixture to structure with retention wires
- Approved for dry/damp location unless otherwise noted
- Details shown are room side mounting, wall side mounting will be FL flange on wall mount trim

G1	G9	GB	GS	FL	NF	SF
1" (15/16") T-Bar Flange to Flange: 3-15/16" (100.3mm)	9/16" T-Bar For tegular tile installations, fixture position will not be flush to the bottom of the tile Flange to Flange: 3-15/16" (100.3mm)	9/16" T-Bar Rail has bevel edge details. For tegular tile installations, fixture position will be flush to the bottom of the tile Flange to Flange: 3-15/16" (100.3mm)	Screw Slot & 9/16" T-Bar For 9/16" installations with tegular tile, fixture position will be flush to the bottom of the tile Flange to Flange: 3-15/16" (100.3mm)	Exposed Standard 1/2" Flange Detail Flange to Flange: 4-1/8" (104.1mm)	Metal Pan or Millwork Flange to Flange: 3-3/4" (95.25mm)	Drywall, Flangeless Detail Flange to Flange: 4-1/2" (115.6mm)
						

Mounting: MOD Options

- Specify **MOD** in the part number for any of the below options
- Consult factory for **MOD** specification details, pricing, and lead-time information

MOD Alternative Ceiling Solutions

Voltage

- Some EV3D configurations will not accommodate all voltage options; consult with factory

U	Universal
1	120 volt
2	277 volt
3	347 volt



Driver

- Standard Driver Option = FSD
- Driver Lifetime: 50,000 hours at 25°C ambient operating conditions
- For more driver options see Pinnacle Resource Guide
- Some EV3D configurations will not accommodate all driver options; consult with factory

0-10V Drivers

FSD	Factory Select Driver 1%, 0-10v
PL2	Signify Advance Xitanium 1%, 0-10v
PL4	Advance Xitanium 347v 1%, 0-10v, requires 347v
OL2	eldoLED Optotronic, 1%, 0-10v
OL4	eldoLED Optotronic 347v, 1% 0-10v, requires 347v option
EE1	eldoLED ECOdrive 1%, 0-10v Logarithmic
EE2	eldoLED ECOdrive 1%, 0-10v Linear
ES1	eldoLED SOLOdrive 0-10v, 0.1% Logarithmic
ES2	eldoLED SOLOdrive 0-10v, 0% Linear
OL5	eldoLED Optotronic 1%, 0-10v, AUX
PL5	Advance Xitanium 1%, 0-10v, AUX

DALI Drivers

EE3	eldoLED ECOdrive 1%, DALI 2, Logarithmic, DT6
ES3	eldoLED SOLOdrive 0.1%, DALI 2, Logarithmic, DT6

Lutron Drivers

LH1	Lutron Hi-lume Soft-on, Fade-to-black 1%, EcoSystem, LDE1
------------	---

Alternate Drivers

PS1	Advance Xitanium Step Dimming 50%/100%
EH1	ERP 1%, Line Voltage and ELV, requires 120v

Driver: MOD Options

- Specify **MOD** in the part number for any of the below options
- Consult factory for **MOD** specification details, pricing, and lead-time information

MOD	POE or DC Power
------------	-----------------

How to specify Circuiting, Battery and Emergency

- Select fixture circuiting from options below
 - Some EV3D configurations will not accommodate all circuiting options, consult with factory

Circuiting

1	Single Circuit
M	Multi Circuit <i>(Not available with controls)</i>
E	Emergency Circuit only
N	Night Light Circuit only

- Battery and emergency section options are available in addition to fixture circuit
 - Select battery and emergency section options below; factory shop drawing required
 - Some EV3D configurations will not accommodate all circuiting options, consult with factory

Battery and/or Emergency If Required

0	No battery or specific emergency section required
----------	---



Battery

- Select battery section type if required, indicate total QTY. *Example 2PLL*
- 90 minute battery runtime; test button is remote
- No battery option available for 2' lengths

- Entire fixture is on battery for lengths up to 5'
- Largest reflector section is on battery for 6', 7' and 8' housing lengths
- For more battery options available, see Pinnacle Resource Guide

0	No Battery
_FSB	Factory Select Battery (10w option)
_FSBST	Factory Select Battery (10w, Self Testing)
_ILL	Iota 10w Integral Lithium, Self Testing
_PLL	Bodine 10w Integral Lithium, Self Testing

For Approximate Battery Lumen Output

- Multiply battery wattage X fixture LPW shown on Lumen Table
- 92.3 (LPW) x 10 (watts) = 923 battery lumen output

Emergency

- Select emergency section type if required, indicate total QTY. *Example 1E*
- Combine battery and emergency section ordering codes if both options are selected

_FSG	Factory Select ALCR Emergency Control Device, UNV
_GI	Iota ETS-DR, Emergency Control Device, UNV
_GB	Bodine GTD, Emergency Control Device, 120v or 277v
_E	Emergency circuit section
_N	Night Light circuit section
_L	Life Safety circuit section NO THROUGH WIRE

Battery OR Emergency Ordering Examples

- Single circuit, 10w Integral Battery Ordering Code: 1-1FSB
- Emergency only, 10w Integral Battery Ordering Code: E-1FSB
- Single circuit, GTD required Ordering Code: 1-1GB

Finish

- Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes
- Selecting a fixture finish other than white may impact lumen output; consult factory for more information

W	White
S	Metallic Silver
BL	Textured Black
GR	Graphite
BR	Bronze
CC	Custom Color

Fixture Options

- Additional options to enhance the fixture and finish of the product
- FIL has 2" min - 12" max length
- FIL Option angle range is 40° to 90°
- FIL Option is not IC rated

QS	Quick Ship
CP	Chicago Plenum
GLR	Internal Fast Blow Fuse
DSP	Customer Supplied Battery/Driver/Sensor
FIL	Field Cut Illuminated Extension

- Domestic content option - compliance is configuration dependent; consult factory for conformation

BA	Buy America(n) Act and/or Build America Buy America Compliant
-----------	---

Quick Ship

Shielding	Source	Mounting	Voltage	Driver	Circuiting	Battery	Finish	Options
10-Day								
AHEWHE	80 CRI, all color temperatures, all lumen packages <i>See pg 2</i>	G1 1" T-Bar G9 9/16" T-Bar GS Screw Slot FL 1/2" Flange NF Flangeless SF Spackle Flange	U Universal (120-277) 1 120V 2 277V	FSD Factory Select Driver (1%, 0-10v)	1 Single Circuit E Emergency N Night Light	0 None FSB Factory Select Battery	W White	CP Chicago Plenum GLR Fast Blow Fuse FIL Illuminated Extensions

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

Fixture Options: MOD Options

- Specify **MOD** in the part number for any of the below options
- Consult factory for **MOD** specification details, pricing, and lead-time information

MOD	Remote Driver
------------	---------------

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568

EV3DPM_LED_SPEC_SEPT2025

page 7