

See Housing  
Section

See Mounting Section

# EDGE EV6PM

## 6" Recessed Perimeter

### Key Features

- Extruded aluminum trim with formed cold rolled 20 gauge steel back box housing
- 5-year limited warranty covers LED, driver and fixture
- UL and cUL listed. IC rated
- Approved for dry/damp location unless otherwise noted
- Room-Side Maintenance for LED system
- Product transparency with third-party verified Living Building Challenge (LBC) Declared



Example Part #: EV6PM2-A-830HO-26'-G1-U-FSD-1-0-W

| HOUSING | SHIELDING | CRI, CCT & OUTPUT | LENGTH OR PATTERN | MOUNTING | VOLTAGE | DRIVER | CIRCUITING | BATTERY & EMERGENCY | FINISH | FIXTURE OPTIONS | CONTROLS |
|---------|-----------|-------------------|-------------------|----------|---------|--------|------------|---------------------|--------|-----------------|----------|
|---------|-----------|-------------------|-------------------|----------|---------|--------|------------|---------------------|--------|-----------------|----------|

| HOUSING                                                                                                                                                                                                                                             | SHIELDING                                        | CRI, CCT & OUTPUT <sup>1</sup>                                                                                                                                                 | LENGTH OR PATTERN <sup>2</sup>                                                                                                                                                                                                                                                                                                                      |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>EV6PM</b> - Edge 6, Perimeter<br><b>EV6PM2</b> - Edge 6, Perimeter, 2" Regress<br><b>EV6PM3</b> - Edge 6, Perimeter, 3" Regress<br><b>EV6PM4</b> - Edge 6, Perimeter, 4" Regress<br><b>MOD</b> - Modifications Available<br><i>Housing pg. 2</i> | <b>A</b> - Satine Lens<br><i>Shielding pg. 2</i> | <b>_27_</b> - 2700K<br><b>_30_</b> - 3000K<br><b>_35_</b> - 3500K<br><b>_40_</b> - 4000K<br><b>CL</b> - Custom Lumens<br><b>CW</b> - Custom Watts<br><i>Lumen Output pg. 2</i> | <b>_</b> - Individual Fixture<br><b>_</b> - Continuous Row<br><b>SI</b> - Inside Square<br><b>SO</b> - Outside Square<br><b>RI_x</b> - Inside Rectangle<br><b>RO_x</b> - Outside Rectangle<br><b>UI_x</b> - Inside U Shape<br><b>UO_x</b> - Outside U Shape<br><b>LI_x</b> - Inside L Shape<br><b>LO_x</b> - Outside L Shape<br><i>Length pg. 3</i> |

| MOUNTING                                                                                                                                                                                                                              | VOLTAGE                                                                                                               | DRIVER                                                                                                                                                                                                                                                                                                                                                                                                                                                        | CIRCUITING                                                                                                                                                           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>G1</b> - 1" (15/16") T Bar<br><b>G9</b> - 9/16" T Bar<br><b>GB</b> - 9/16" Bevel T Bar<br><b>GS</b> - Screw Slot T Bar<br><b>FL</b> - 1/2" Flange<br><b>NF</b> - Non Flange<br><b>SF</b> - Spackle Flange<br><i>Mounting pg. 4</i> | <b>U</b> - Universal (120 thru 277V)<br><b>1</b> - 120V<br><b>2</b> - 277V<br><b>3</b> - 347V<br><i>Voltage pg. 4</i> | <b>FSD</b> - Factory Select Driver (1%, 0-10v)<br><b>PL2</b> - Advance Xitanium (1%, 0-10v)<br><b>OL2</b> - eldoLED Optotronic (1%, 0-10v)<br><b>OL4</b> - eldoLED Optotronic 347v (1%, 0-10v)<br><b>EE1</b> - eldoLED ECOdrive (1%, 0-10v)<br><b>ES1</b> - eldoLED SOLOdrive (0.1%, 0-10v)<br><b>LH1</b> - Lutron Hi-lume (1%, EcoSystem)<br><b>L51</b> - Lutron 5-Series (5%, EcoSystem)<br><b>PS1</b> - Advance Xitanium (50%/100%)<br><i>Driver pg. 4</i> | <b>1</b> - Single Circuit<br><b>M</b> - Multi Circuit<br><b>E</b> - Emergency (entire fixture)<br><b>N</b> - Night Light (entire fixture)<br><i>Circuiting pg. 5</i> |






| BATTERY & EMERGENCY <sup>3</sup>                                                                                                                                                                                                                | FINISH                                                                                                                                                                        | FIXTURE OPTIONS <sup>4</sup>                                                                                                                                                                                                                                                                   | CONTROLS                                                                                                                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| <b>0</b> - None<br><b>_FSB</b> - Factory Select Battery<br><b>_FSG</b> - Factory Select ALCR<br><b>_GB</b> - Bodine GTD<br><b>_GI</b> - Iota ETS DR<br><b>_ILL</b> - Iota 10W<br><b>_PLL</b> - Bodine 10W<br><i>Battery and Emergency pg. 5</i> | <b>W</b> - White<br><b>S</b> - Metallic Silver<br><b>BL</b> - Textured Black<br><b>BR</b> - Bronze<br><b>GR</b> - Graphite<br><b>CC</b> - Custom Color<br><i>Finish pg. 5</i> | <b>CP</b> - Chicago Plenum<br><b>GLR</b> - Internal Fast Blow Fuse<br><b>DSP</b> - Customer Supplied Battery/Driver/<br>Sensor<br><b>FIL</b> - Field Cut Illuminated Extension<br><b>BA</b> - Buy America(n) Act and/or Build<br>America Buy America Compliant<br><i>Fixture Options pg. 5</i> | Pinnacle is able to accommodate different control solutions from different manufacturers. Consult Factory for more information. |

<sup>1</sup>When specifying CRI, CCT & OUTPUT the first \_ is for specifying either **8** - 80CRI or **9** - 90CRI. The ending \_ are for specifying output, example **HO** - High Output. See output charts for more information. <sup>2</sup>Individual fixtures come in 2', 3', 4', 5', 6' & 8' lengths. Continuous row come in 1/8" increments. For Patterns specify pattern shape and overall dimensions. Example: L6x4: L pattern that is 6'x4'. <sup>3</sup>Enter quantity for Battery and Emergency, Example 2PLL. <sup>4</sup>Compliance is configuration dependent; consult factory for confirmation.


Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



## Housing

| EV6PM                                                                            | EV6PM2                                                                            | EV6PM3                                                                            | EV6PM4                                                                             | MOD<br>EV6DPM6                                                                      |
|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Edge 6, Perimeter                                                                | Edge 6, Perimeter<br>2" Regress                                                   | Edge 6, Perimeter<br>3" Regress                                                   | Edge 6, Perimeter<br>4" Regress                                                    | Edge 6, Perimeter<br>6" Regress                                                     |
|  |  |  |  |  |

## Shielding



## CRI, CCT & Output

- Specify either 80 or 90 CRI
- Longer lead-time may apply for 90 CRI. Consult factory
- 90 CRI = R9≥50

### Custom Output - Lumens OR Wattage

|                 |                                                     |                                                                                            |
|-----------------|-----------------------------------------------------|--------------------------------------------------------------------------------------------|
| <b>CL</b> _____ | Specify CRI, CCT and desired lumens (i.e. CL835500) | Specify lumens between standard offering listed below. Lumens are specified per color temp |
| <b>CW</b> _____ | Specify CRI, CCT and desired wattage (i.e. CW9407)  | Specify watts between standard offering listed below                                       |

### 80 CRI

|              | Color | Output   | Watts<br>per foot | Shielding                       |      |
|--------------|-------|----------|-------------------|---------------------------------|------|
|              |       |          |                   | <b>A</b><br>Satine<br>Lumens/ft | LPW  |
| <b>830</b>   | 3000K | Standard | 4.6               | 411                             | 88.9 |
| <b>830HO</b> | 3000K | High     | 8.7               | 752                             | 86.9 |
| <b>835</b>   | 3500K | Standard | 4.6               | 423                             | 91.5 |
| <b>835HO</b> | 3500K | High     | 8.7               | 774                             | 89.4 |
| <b>840</b>   | 4000K | Standard | 4.6               | 431                             | 93.2 |
| <b>840HO</b> | 4000K | High     | 8.7               | 788                             | 91.1 |

### 90 CRI

|              |       |          |     |     |      |
|--------------|-------|----------|-----|-----|------|
| <b>927</b>   | 2700K | Standard | 4.6 | 325 | 70.2 |
| <b>927HO</b> | 2700K | High     | 8.7 | 594 | 68.7 |
| <b>930</b>   | 3000K | Standard | 4.6 | 379 | 81.9 |
| <b>930HO</b> | 3000K | High     | 8.7 | 693 | 80.1 |
| <b>935</b>   | 3500K | Standard | 4.6 | 381 | 82.4 |
| <b>935HO</b> | 3500K | High     | 8.7 | 696 | 80.5 |
| <b>940</b>   | 4000K | Standard | 4.6 | 385 | 83.2 |
| <b>940HO</b> | 4000K | High     | 8.7 | 704 | 81.4 |

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568

EV6DPM\_LED\_SPEC\_SEPTEMBER2025



Length


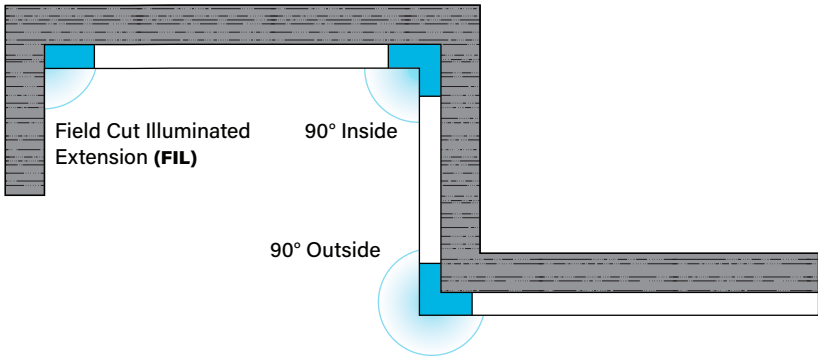
- Individual units cannot be joined, end trims are factory installed and cannot be removed
- Refer to Pattern section for specification and ordering options
- Continuous Rows are made up of even and odd length fixtures; designed to fall on-grid

| 2                       | 3              | 4              | 5              | 6              | 8              | —                                                                 |
|-------------------------|----------------|----------------|----------------|----------------|----------------|-------------------------------------------------------------------|
| Indiv. Fixture          | Indiv. Fixture | Indiv. Fixture | Indiv. Fixture | Indiv. Fixture | Indiv. Fixture | Cont. Run<br>Specify nominal<br>overall row length<br>to the 1/8" |
| 23" (584.2mm)           |                |                |                |                |                |                                                                   |
|                         | 35" (889mm)    |                |                |                |                |                                                                   |
|                         |                | 47" (1193.8mm) |                |                |                |                                                                   |
|                         |                |                | 59" (1498.6mm) |                |                |                                                                   |
|                         |                |                |                | 71" (1803.4mm) |                |                                                                   |
|                         |                |                |                |                | 95" (2413mm)   |                                                                   |
| Specify to the 1/8" >>> |                |                |                |                |                |                                                                   |

Pattern

- Specify pattern shape and overall dimensions (includes corner dimensions)
- 90 degree horizontal corners are 14" x 14" (overall, outside dimension)
- Use with Field Cut Illuminated extensions (**FIL**) to fit to wall to wall dimensions
- Not all drivers available with all patterns; consult factory








| SI_                                                                                                                  | SO_ | RI_x_                                                                                                                   | RO_x_ | UI_x_x_                                                                                                               | UO_x_x_ | LI_x_                                                                                                                 | LO_x_ |
|----------------------------------------------------------------------------------------------------------------------|-----|-------------------------------------------------------------------------------------------------------------------------|-------|-----------------------------------------------------------------------------------------------------------------------|---------|-----------------------------------------------------------------------------------------------------------------------|-------|
| Square,<br>Inside ( <b>SI</b> ) or Outside ( <b>SO</b> )<br>Provide overall length dimension for<br>each fixture leg |     | Rectangle,<br>Inside ( <b>RI</b> ) or Outside ( <b>RO</b> )<br>Provide overall length dimension for<br>each fixture leg |       | U-Shape,<br>Inside ( <b>UI</b> ) or Outside ( <b>UO</b> )<br>Provide overall length dimension for<br>each fixture leg |         | L-Shape,<br>Inside ( <b>LI</b> ) or Outside ( <b>LO</b> )<br>Provide overall length dimension for<br>each fixture leg |       |





## Mounting

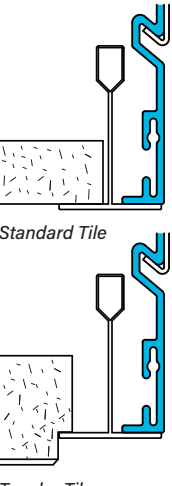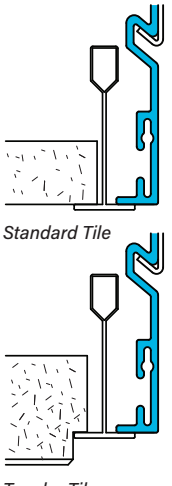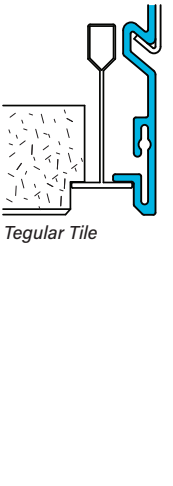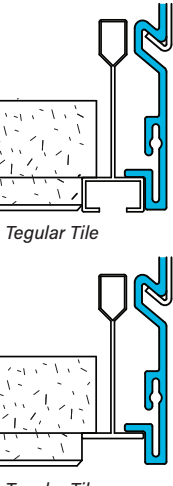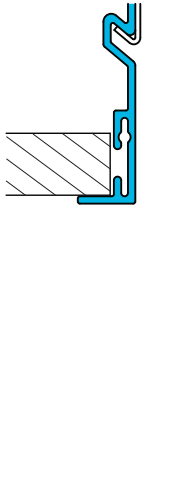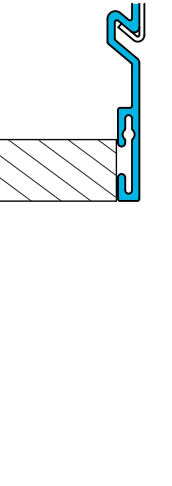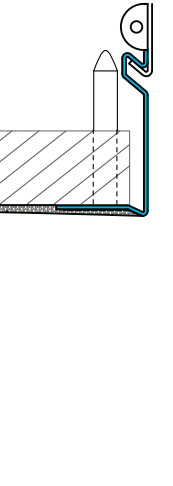- All individual units cannot be joined, end trims are factory installed and cannot be removed
- Designed to install into acoustical grid and inaccessible ceilings
- Grid retention brackets integral to housing and require mechanical attachment
- Each housing contains 4 grid retention brackets
- Tie off fixture to structure with retention wires
- Approved for dry/damp location unless otherwise noted

| G1                                                                                | G9                                                                                                                                                     | GB                                                                                                                                                                              | GS                                                                                                                                                                         | FL                                                                                  | NF                                                                                   | SF                                                                                   |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| 1" (15/16") T-Bar<br>Flange to Flange:<br>5-15/16" (151.1mm)                      | 9/16" T-Bar<br>For tegular tile installations, fixture position will not be flush to the bottom of the tile<br>Flange to Flange:<br>5-15/16" (151.1mm) | 9/16" T-Bar<br>Rail has bevel edge details. For tegular tile installations, fixture position will be flush to the bottom of the tile<br>Flange to Flange:<br>5-15/16" (151.1mm) | Screw Slot & 9/16" T-Bar<br>For 9/16" installations with tegular tile, fixture position will be flush to the bottom of the tile<br>Flange to Flange:<br>5-15/16" (151.1mm) | Exposed Standard 1/2"<br>Flange Detail<br>Flange to Flange:<br>6-1/8" (154.9mm)     | Metal Pan or Millwork<br>Flange to Flange:<br>5-3/4" (146.1mm)                       | Drywall,<br>Flangeless Detail<br>Flange to Flange:<br>6-1/2" (166.3mm)               |
|  |                                                                      |                                                                                               |                                                                                          |  |  |  |
| Standard Tile<br><br>Tegular Tile                                                 | Tegular Tile                                                                                                                                           | Tegular Tile                                                                                                                                                                    | Tegular Tile                                                                                                                                                               |                                                                                     |                                                                                      |                                                                                      |

## Voltage

- Some EV6 configurations will not accommodate all voltage options; consult with factory

| U | Universal |
|---|-----------|
| 1 | 120 volt  |
| 2 | 277 volt  |
| 3 | 347 volt  |

## Driver

- Standard Driver Option = FSD
- Driver Lifetime: 50,000 hours at 25°C ambient operating conditions
- For more driver options see Pinnacle Resource Guide
- Some EV6 configurations will not accommodate all driver options; consult with factory

| 0-10V Drivers     |                                                           |
|-------------------|-----------------------------------------------------------|
| FSD               | Factory Select Driver 1%, 0-10v                           |
| PL2               | Signify Advance Xitanium 1%, 0-10v                        |
| PL4               | Advance Xitanium 347v 1%, 0-10v, requires 347v            |
| OL2               | eldoLED Optotronic, 1%, 0-10v                             |
| OL4               | eldoLED Optotronic 347v, 1% 0-10v, requires 347v option   |
| EE1               | eldoLED ECOdrive 1%, 0-10v Logarithmic                    |
| EE2               | eldoLED ECOdrive 1%, 0-10v Linear                         |
| ES1               | eldoLED SOLOdrive 0-10v, 0.1% Logarithmic                 |
| ES2               | eldoLED SOLOdrive 0-10v, 0% Linear                        |
| DALI Drivers      |                                                           |
| EE3               | eldoLED ECOdrive 1%, DALI 2, Logarithmic, DT6             |
| ES3               | eldoLED SOLOdrive 0.1%, DALI 2, Logarithmic, DT6          |
| Lutron Drivers    |                                                           |
| LH1               | Lutron Hi-lume Soft-on, Fade-to-black 1%, EcoSystem, LDE1 |
| Alternate Drivers |                                                           |
| PS1               | Advance Xitanium Step Dimming 50%/100%                    |
| EH1               | ERP 1%, Line Voltage and ELV, requires 120v               |

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568

EV6DPM\_LED\_SPEC\_SEPTMBER2025



## How to specify Circuiting, Battery and Emergency

- 1**
- Select fixture circuiting from options below
  - Some EV6 configurations will not accommodate all circuiting options, consult with factory

### Circuiting

|          |                          |
|----------|--------------------------|
| <b>1</b> | Single Circuit           |
| <b>M</b> | Multi Circuit            |
| <b>E</b> | Emergency Circuit only   |
| <b>N</b> | Night Light Circuit only |

- 2** + **3**
- Battery and emergency section options are available in addition to fixture circuit
  - Select battery and emergency section options below; factory shop drawing required
  - Some EV6 configurations will not accommodate all circuiting options, consult with factory

### Battery and/or Emergency If Required

- 0** No battery or specific emergency section required

#### Battery

- Select battery section type if required, indicate total QTY. Example 2PLL
- 90 minute battery runtime; test button is remote to fixture and requires an additional drop
- No battery option available for 2' lengths

|               |                                            |
|---------------|--------------------------------------------|
| <b>0</b>      | No Battery                                 |
| <b>_FSB</b>   | Factory Select Battery (10w option)        |
| <b>_FSBST</b> | Factory Select Battery (10w, Self Testing) |
| <b>_ILL</b>   | Iota 10w Integral Lithium, Self Testing    |
| <b>_PLL</b>   | Bodine 10w Integral Lithium, Self Testing  |

- Entire fixture is on battery for lengths up to 5'
- Largest reflector section is on battery for 6', 7' and 8' housing lengths
- For more battery options available, see Pinnacle Resource Guide

#### For Approximate Battery Lumen Output

- Multiply battery wattage X fixture LPW shown on Lumen Table
- $92.3 \text{ (LPW)} \times 10 \text{ (watts)} = 923 \text{ battery lumen output}$

#### Emergency

- Select emergency section type if required, indicate total QTY. Example 1E
- Combine battery and emergency section ordering codes if both options are selected

|             |                                                    |
|-------------|----------------------------------------------------|
| <b>_FSG</b> | Factory Select ALCR Emergency Control Device, UNV  |
| <b>_GI</b>  | Iota ETS-DR, Emergency Control Device, UNV         |
| <b>_GB</b>  | Bodine GTD, Emergency Control Device, 120v or 277v |
| <b>_E</b>   | Emergency circuit section                          |
| <b>_N</b>   | Night Light circuit section                        |
| <b>_L</b>   | Life Safety circuit section NO THROUGH WIRE        |

#### Battery OR Emergency Ordering Examples

- |                                        |                       |
|----------------------------------------|-----------------------|
| • Single circuit, 10w Integral Battery | Ordering Code: 1-1FSB |
| • Emergency only, 10w Integral Battery | Ordering Code: E-1PLL |
| • Single circuit, GTD required         | Ordering Code: 1-1GB  |

### Finish

- Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes
- Selecting a fixture finish other than white may impact lumen output; consult factory for more information

|           |                 |
|-----------|-----------------|
| <b>W</b>  | White           |
| <b>S</b>  | Metallic Silver |
| <b>BL</b> | Textured Black  |
| <b>GR</b> | Graphite        |
| <b>BR</b> | Bronze          |
| <b>CC</b> | Custom Color    |

### Fixture Options

- Additional options to enhance the fixture and finish of the product
- FIL has 2" min - 12" max length
- FIL Option angle range is 40° to 90°
- FIL Option is not IC rated

|            |                                         |
|------------|-----------------------------------------|
| <b>CP</b>  | Chicago Plenum                          |
| <b>GLR</b> | Internal Fast Blow Fuse                 |
| <b>DSP</b> | Customer Supplied Battery/Driver/Sensor |
| <b>FIL</b> | Field Cut Illuminated Extension         |

- Domestic content option - compliance is configuration dependent; consult factory for conformation

|           |                                                               |
|-----------|---------------------------------------------------------------|
| <b>BA</b> | Buy America(n) Act and/or Build America Buy America Compliant |
|-----------|---------------------------------------------------------------|

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568

EV6DPM\_LED\_SPEC\_SEPT2025




## Controls

- Pinnacle is able to accommodate different control solutions from different manufacturers. Consult Factory for more information.

## Photometrics

### Satine Lens

|           |            |
|-----------|------------|
| Test #    | ITL86394   |
| Catalog # | EV6A-840-4 |
| Lumens    | 1724 lm    |
| Watts     | 18.5 W     |
| Efficacy  | 93 LPW     |



### Candela Distribution

| Vert<br>Angle | Horizontal Angle |      |     |      |     |
|---------------|------------------|------|-----|------|-----|
|               | 0                | 22.5 | 45  | 67.5 | 90  |
| 0             | 631              | 631  | 631 | 631  | 631 |
| 5             | 627              | 627  | 627 | 627  | 627 |
| 10            | 619              | 616  | 616 | 616  | 615 |
| 15            | 602              | 598  | 599 | 599  | 596 |
| 20            | 582              | 575  | 578 | 575  | 574 |
| 25            | 553              | 546  | 548 | 545  | 543 |
| 30            | 521              | 514  | 516 | 512  | 508 |
| 35            | 483              | 476  | 477 | 473  | 470 |
| 40            | 442              | 436  | 436 | 432  | 429 |
| 45            | 399              | 393  | 393 | 389  | 386 |
| 50            | 354              | 350  | 348 | 344  | 343 |
| 55            | 308              | 304  | 303 | 300  | 298 |
| 60            | 261              | 257  | 256 | 254  | 253 |
| 65            | 213              | 211  | 209 | 207  | 207 |
| 70            | 167              | 165  | 163 | 162  | 162 |
| 75            | 121              | 119  | 118 | 118  | 118 |
| 80            | 78               | 77   | 76  | 75   | 75  |
| 85            | 38               | 37   | 37  | 36   | 36  |
| 90            | 0                | 0    | 0   | 0    | 0   |

### Luminance Data (cd/sq.m)

| Angle In<br>Degrees | Average<br>0-Deg | Average<br>45-Deg | Average<br>90-Deg |
|---------------------|------------------|-------------------|-------------------|
| 45                  | 3722             | 3666              | 3599              |
| 55                  | 3535             | 3477              | 3418              |
| 65                  | 3321             | 3257              | 3225              |
| 75                  | 3087             | 3009              | 3009              |
| 85                  | 2851             | 2774              | 2697              |

For all available IES files, please visit our website at [pinnacle-ltg.com](http://pinnacle-ltg.com). Photometry testing in accordance to IESNA-LM-79-08 at an NVLAP or IAS accredited testing laboratory. Testing conducted at 25°C ambient conditions

## Applications & Certificates

**Housing:** Extruded aluminum trim with formed cold rolled 20 gauge steel back box housing. Highly reflective die-formed white painted steel reflector.

**Shielding:** Diffuse snap-in acrylic lens, removable for maintenance.

**Mounting:** Evolution is designed to install into acoustical grid and inaccessible ceilings. Specify GXG, FLF, SFS, NFN for individual, unjoinable units (individual units will fall on-grid). Specify GX, FL, SF, NF for continuous runs (runs designed to fall on-grid). Grid retention brackets are integral to housing. Each housing contains 4 grid retention brackets. Consult factory for detailed installation instructions.

**LED:** 25°C test environment. Lumen output/wattage has a margin of +/- 5%; 2' or 3' lengths may have a greater wattage deviation. Luminaire configurations tested in accordance with IES LM-79. Diodes tested in accordance with IES LM-80. Lifetime calculated using IES TM-21. Minimum lifetime greater than 60,000 hours. Lifetime Projection L70 = 135,200 hours and L90 = 40,300 hours. MacAdam 3-Step Ellipses. Not all products are Lighting Facts listed. For all available IES files, please visit our website at [pinnacle-ltg.com](http://pinnacle-ltg.com).

**CRI, CCT & Lumen Output:** Two lumen packages available. Standard and High (HO). Custom outputs are available. Specify custom lumens or watts between standard offering listed on CRI, CCT & Output page. 80 CRI is available for 3000K, 3500K, and 4000K. 90 CRI is available for 2700K, 3000K, 3500K, and 4000K. 90 CRI = R9≥50.

**Voltage:** Universal (U), 120 volt (1), 277 volt (2) and 347 volt (3) options available. Must specify OL4 in Driver section when 347 volt (3) is selected. Some Evolution configurations will not accommodate all voltage options; consult with factory.

**Driver:** Standard Driver Option is Advance Xitanium 0-10V, 1% = PL2. Electronic driver, power factor is >0.9 with a THD <20%. Driver Lifetime: 50,000 hours at 25°C ambient operating conditions. Ambient operating range: -20°F/-30°C to 98°F/37°C. For more driver options, see Pinnacle Resource Guide. Some EDGE configurations will not accommodate all driver options.

**Circuiting:** Select from single circuit (1), Multi circuit - For multiple circuiting and zone control, requires factory shop drawing (M), Emergency circuit (E), Life Safety (L) or Night Light circuit (N). For emergency circuiting situations that require no through wire or circuit separation, Life Safety Circuit should be selected. This will provide a separate power feed and only the Life Safety Circuit in that section. Some EDGE configurations will not accommodate all circuiting options; consult with factory.

**Battery & Emergency:** Select battery or emergency options if required. If battery or emergency option is not required, enter 0. Battery duration is 90 minutes as standard. Test button is remote to fixture. For more Battery options, see Pinnacle Resource Guide.

**Finish:** Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes or for additional custom color and finish options.

**Controls:** Consult factory.

**Buy America Act (BAA) and Build America, Buy America Act (BABA) Compliance:** BAA and/or BABA compliance options are available to support federally funded projects requiring domestic content. Availability depends on configuration; Compliance is configuration-dependent; consult factory for confirmation.

**Labels:** UL and cUL 1598 listed. Standard and HO lumen packages are IC Rated, approved for dry/damp location unless otherwise noted.

**Sustainability:** All models are Living Building Challenge (LBC) Declared with third-party verification. The Declare Label from ILFI provides transparent insights into materials, sourcing, and environmental impact, promoting informed, sustainable choices that benefit both people and the planet. View the label [here](#).

**Fixture Weight:** Maximum fixture weight is 15lbs per 4' fixture.

**Warranty:** Evolution LED offered with a 5-year limited warranty. Covers LED, driver and fixture.