


EDGE EX3DWW

3" Suspended Direct Linear Wall Wash

Key Features

- 6063-T5 Extruded aluminum housing
- Extruded aluminum module with micro reflector for perfect wall washing illumination
- Wiring access available through bottom of housing
- 5-year limited warranty covers LED, driver and fixture
- UL and cUL listed
- Approved for dry/damp location unless otherwise noted
- Product transparency with third-party verified Living Building Challenge (LBC) Declared

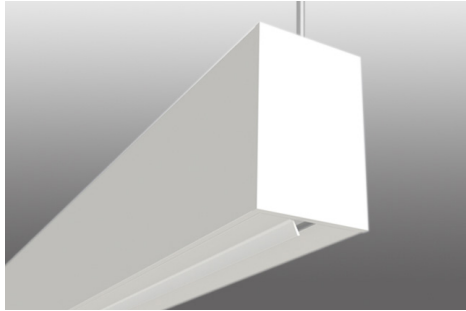

Declare.



Example Part #: EX3D-WW-N-830HO-26'-AC48G1-U-FSD-1-0-W

EX3D - WW - N - CRI, CCT & OUTPUT - LENGTH OR PATTERN - MOUNTING - VOLTAGE - DRIVER - CIRCUITING - BATTERY & EMERGENCY - FINISH - FIXTURE OPTIONS

WW	N	-----	-----
DIRECT SHIELDING	INDIRECT SHIELDING	CRI, CCT & OUTPUT ¹	LENGTH ²
WW - Wall Wash <i>Shielding pg. 2</i>	N - None <i>Shielding pg. 2</i>	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K CL - Custom Lumens CW - Custom Watts <i>Lumen Output pg. 2</i>	--- - Individual Fixture --- - Continuous Row <i>Length pg. 2</i>
-----	---	---	---
MOUNTING ³	VOLTAGE	DRIVER	CIRCUITING
AC - (M)AC to Grid AC - (M)AC to J Box AC - (M)AC to Structure AC5 - 5" Non-Power Canopy AC5 - 5" Non-Power Canopy SQ - 5" Square Canopy SQ - 5" Square Canopy S - Surface Mount <i>Mounting pg. 3</i>	U - Universal (120 thru 277V) 1 - 120V 2 - 277V 3 - 347V <i>Voltage pg. 3</i>	FSD - Factory Select Driver (1%, 0-10v) PL2 - Advance Xitanium (1%, 0-10v) PL4 - Advance Xitanium 347v (1%, 0-10v) EE1 - eldoLED ECOdrive (1%, 0-10v) ES1 - eldoLED SOLOdrive (0.1%, 0-10v) LH1 - Lutron Hi-lume (1%, EcoSystem) PS1 - Advance Xitanium (50%/100%) OL2 - eldoLED Optotronic (1%, 0-10v) <i>Driver pg. 3</i>	1 - Single Circuit M - Multi Circuit E - Emergency (entire fixture) N - Night Light (entire fixture) <i>Circuiting pg. 4</i>
---	---	-----	-----
BATTERY & EMERGENCY ⁴	FINISH	FIXTURE OPTIONS ⁵	CONTROLS
0 - None FSG - Factory Select ALCR FSB - Factory Select Battery GI - Iota ETS DR GB - Bodine GTD PLL - Bodine 10W ILL - Iota 10W Integral E - Emergency Section N - Night Light Section L - Life Safety Section <i>Battery and Emergency pg. 4</i>	W - White S - Metallic Silver BL - Textured Black BR - Bronze GR - Graphite CC - Custom Color <i>Finish pg. 4</i>	TC - Top Cover DSP - Customer Supplied Battery/Driver/ Sensor BA - Buy America(n) Act and/or Build America Buy America Compliant Fixture <i>Options pg. 4</i>	<i>Pinnacle is able to accommodate different control solutions from different manufacturers. Consult Factory for more information.</i>

¹When specifying SOURCE the first _ is for specifying either 8 - 80CRI, or 9 - 90CRI. The ending _ _ are for specifying output, example HO - High Output. ²Individual fixtures come in 2', 3', 4', 5', 6', 7' & 8' lengths. Continuous row come in 1/8" increments. ³Specify AC Cable: Standard single AC = AC or Movable AC = MAC; Specify AC length standard AC is 48"; Specify grid: G1=15/16", G9=9/16", GS=Screw Slot. Example: AC48G1
⁴Enter quantity for Battery and Emergency, Example 2PLL. ⁵Compliance is configuration dependent; consult factory for confirmation.


Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



Direct Shielding

WW

Wall Wash



Indirect Shielding

N

None

Output

- Specify either 80 or 90 CRI
- Longer lead-time may apply for 90 CRI. Consult factory.
- 90 CRI = R9≥50

Custom Output- Lumens OR Wattage

CL _____	Specify CRI, CCT and desired lumens (i.e. CL835400)	Max Lumens: 1074lm/ft. Max lumens dependent on color temp. Consult factory for more information
CW _____	Specify CRI, CCT and desired wattage (i.e. CW9407)	Max Watts: 14.8 watts/ft. Consult factory for more information.

80 CRI

	Color	Lumens per foot	Shielding WW Wall Wash LPW	Watts/ft
830	3000K	500	69	7.2
830HO	3000K	750	68	11.1
830VHO	3000K	N/A		
835	3500K	500	73	6.8
835HO	3500K	750	72	10.4
835VHO	3500K	1000	70	14.4
840	4000K	500	76	6.5
840HO	4000K	750	75	10.0
840VHO	4000K	1000	73	13.8

90 CRI

927	2700K	500	57	8.8
927HO	2700K	750	55	13.7
927VHO	2700K	N/A		
930	3000K	500	62	8.0
930HO	3000K	750	61	12.3
930VHO	3000K	N/A		
935	3500K	500	65	7.7
935HO	3500K	750	64	11.8
935VHO	3500K	N/A		
940	4000K	500	63	8.0
940HO	4000K	750	61	12.3
940VHO	4000K	N/A		

Length

- All individual units cannot be joined, end plates are factory installed and cannot be removed
- For Continuous Runs, add 1/2" (12.7mm) to the overall length of the row to account for end plates

2	3	4	5	6	7	8	—
Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Cont. Run Specify nominal overall row length to the 1'
24" (609.6mm)							
36" (914.4mm)							
48" (1219.2mm)							
60" (1524mm)							
72" (1828.8mm)							
84" (2133.6mm)							
96" (2438.4mm)							

Specify to the 1' >>>

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568


EX3DWW_LED_SPEC_SEPTEMBER2025



Mounting

- Specify cable length in ordering code (AC48G1)
- Standard 48" adjustable cable. Specify up to 350"
- End plates and power cord attached at factory
- Aircraft cable (AC) mounts on 4' (1219.2mm) and 8' (2438.4mm) centers
- Aircraft Cable supplied with 5" (127mm) power and 2" (50.8mm) non-power canopies
- Canopies and pendants match fixture finish, power cords are white or black depending on fixture finish. See Finish section for additional details
- Approved for dry/damp location unless otherwise noted
- Refer to installation instructions during installation at the job site
- Maximum fixture weight is 10 lbs for a standard 4' fixture
- Designed to be 12"-18" away from wall for optimal performance

AC_G1	Aircraft Cable 1" (15/16") T-Bar
AC_G9	Aircraft Cable 9/16" T-Bar
AC_GS	Aircraft Cable Screw Slot T-Bar
AC_JB	Aircraft Cable Junction Box
AC_ST	Aircraft Cable Structure
AC5_G	Aircraft Cable 5" (127mm) Non-Power Canopy
AC5_JB	Aircraft Cable 5" (127mm) Non-Power Canopy
SQ_G	Aircraft Cable 5" (127mm) Square Canopy
SQ_JB	Aircraft Cable 5" (127mm) Square Canopy
MAC_G1	Movable AC 1" (15/16") T-Bar
MAC_G9	Movable AC 9/16" T-Bar
MAC_GS	Movable AC Screw Slot T-Bar
MAC_JB	Movable AC Junction Box
MAC_ST	Movable AC Structure
MAC5_G	Movable AC 5" (127mm) Non-Power Canopy
MAC5_JB	Movable AC 5" (127mm) Non-Power Canopy
MSQ_G	Movable AC 5" (127mm) Square Canopy
MSQ_JB	Movable AC 5" (127mm) Square Canopy
S	Surface Mount

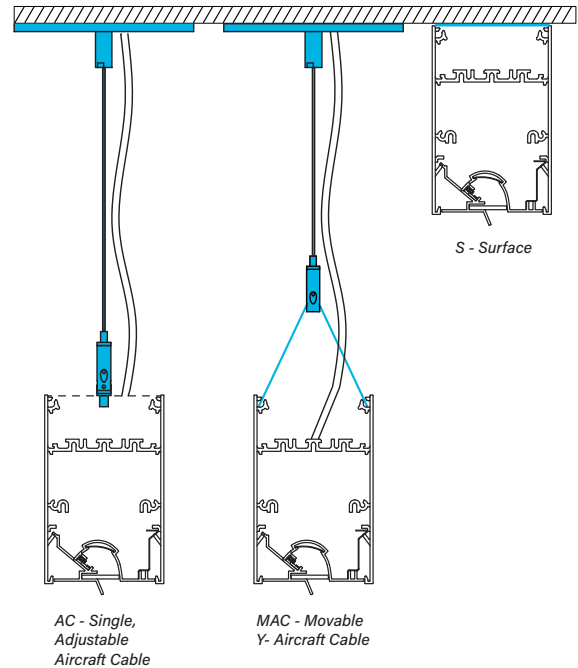

Voltage

- Some EX3DWW configurations will not accommodate all voltage options; consult with factory

U	Universal
1	120 volt
2	277 volt
3	347 volt

Driver

- Standard Driver Option = FSD
- Driver Lifetime: 50,000 hours at 25°C ambient operating conditions
- For more driver options see Pinnacle Resource Guide
- Some EX3DWW configurations will not accommodate all driver options; consult with factory

0-10V Drivers

FSD	Factory Select Driver 1%, 0-10v
PL2	Signify Advance Xitanium 1%, 0-10v
PL4	Advance Xitanium 347v 1%, 0-10v, requires 347v
OL2	eldoLED Optotronic, 1%, 0-10v
OL4	eldoLED Optotronic 347v, 1% 0-10v, requires 347v option
EE1	eldoLED ECOdrive 1%, 0-10v Logarithmic
EE2	eldoLED ECOdrive 1%, 0-10v Linear
ES1	eldoLED SOLOdrive 0-10v, 0.1% Logarithmic
ES2	eldoLED SOLOdrive 0-10v, 0.1% Linear

DALI Drivers

EE3	eldoLED ECOdrive 1%, DALI 2, Logarithmic, DT6
ES3	eldoLED SOLOdrive 0.1%, DALI 2, Logarithmic, DT6

Lutron Drivers

LH1	Lutron Hi-lume Soft-on, Fade-to-black 1%, EcoSystem, LDE1
------------	---

Alternate Drivers

PS1	Advance Xitanium Step Dimming 50%/100%
EH1	ERP 1%, Line Voltage and ELV, requires 120v



How to specify Circuiting, Battery and Emergency

- 1
 - Select fixture circuiting from options below
 - Some EX3DWW configurations will not accommodate all circuiting options, consult with factory

Circuiting

1	Single Circuit
M	Multi Circuit
E	Emergency Circuit only
N	Night Light Circuit only

- 2 + 3
 - Battery and emergency section options are available in addition to fixture circuit
 - Select battery and emergency section options below; factory shop drawing required
 - Some EX3DWW configurations will not accommodate all circuiting options, consult with factory

Battery and/or Emergency If Required

- 0 No battery or specific emergency section required

Battery

- Select battery section type if required, indicate total QTY. *Example 2PLL*
- 90 minute battery runtime; test button is remote to fixture and requires an additional drop
- No battery option available for 2' lengths

- Entire direct fixture housing is on battery for lengths up to 5'
- Half of direct fixture is on battery for 6' or 8' housing lengths
- For more battery options available, see Pinnacle Resource Guide

0	No Battery
_FSB	Factory Select Battery (10w option)
_FSBST	Factory Select Battery (10w, Self Testing)
_ILL	10w Integral Lithium, Self Testing
_PLL	Bodine 10w Integral Lithium, Self Testing

For Approximate Battery Lumen Output

- Multiply battery wattage X fixture LPW shown on Lumen Table
- 92.3 (LPW) x 10 (watts) = 923 battery lumen output

Emergency

- Select emergency section type if required, indicate total QTY. *Example 1E*
- Combine battery and emergency section ordering codes if both options are selected

_FSG	Factory Select Automatic Load Control Relay (ALCR), UNV
_GI	
_GB	Bodine GTD, Generator Transfer Device, 120v or 277v
_E	Emergency circuit section
_N	Night Light circuit section
_L	Life Safety circuit section NO THROUGH WIRE

Battery OR Emergency Ordering Examples

- | | |
|--|---------------------|
| • Single circuit, 10w Integral Battery | Ordering Code: 1-1P |
| • Emergency only, 10w Integral Battery | Ordering Code: E-1P |
| • Single circuit, GTD required | Ordering Code: 1-1G |

Finish

- Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes
- Selecting a fixture finish other than white may impact lumen output; consult factory for more information

W	White (<i>white cord/white canopy</i>)
S	Metallic Silver (<i>white cord/silver canopy</i>)
BL	Textured Black (<i>black cord/black canopy</i>)
BR	Bronze (<i>white cord/bronze canopy</i>)
GR	Graphite (<i>white cord/graphite canopy</i>)
CC	Custom Color (<i>white cord/color match canopy</i>)

Fixture Options

- Additional options to enhance the fixture and finish of the product

TC	Top Cover
DSP	Customer Supplied Battery/Driver/Sensor

- Domestic content option - compliance is configuration dependent; consult factory for conformation

BA	Buy America(n) Act and/or Build America Buy America Compliant
-----------	---

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568

EX3DWW_LED_SPEC_SEPTEMBER2025




Controls

- Pinnacle is able to accommodate different control solutions from different manufacturers. Consult Factory for more information.

Photometrics

Wall Wash

Test #	KPL2015-7
Catalog #	EX3D-WW-840VHO-4
Lumens	3799 lm
Watts	51.7 W
Efficacy	73.5 LPW



Candela Distribution

Vert Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	2101	2101	2101	2101	2101
5	2684	2617	2513	2345	2111
10	3085	3019	2845	2533	2083
15	3116	3086	2999	2658	2036
20	2757	2823	2935	2699	1972
25	2241	2353	2652	2640	1886
30	1787	1888	2249	2481	1773
35	1377	1484	1847	2237	1638
40	1050	1147	1472	1929	1471
45	815	882	1150	1584	1288
50	650	690	885	1255	1079
55	538	560	681	981	855
60	469	473	530	735	639
65	423	413	423	534	439
70	395	382	366	383	278
75	372	355	321	281	155
80	348	327	281	212	79
85	312	292	239	158	37
90	0	0	0	0	0

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	38711	54665	61218
55	31528	39880	50105
65	33627	33599	34869
75	48292	41724	20148
85	120282	92100	14162

For all available IES files, please visit our website at pinnacle-ltg.com. Photometry testing in accordance to IESNA-LM-79-08 at an NVLAP or IAS accredited testing laboratory. Testing conducted at 25°C ambient conditions

Applications & Certificates

Construction: 6063-T5 Extruded aluminum housing.

Shielding: Extruded aluminum module with micro reflector for perfect wall wash illumination.

Mounting: Aircraft cable, wall and surface mount available. Select from 2 aircraft cable options. Select the straight aircraft cable that mounts on 4'-0" (1219.2mm) and 8'-0" (2438.4mm) centers or the movable adjustable Y-cable mount. The Y-Cable design allows for adjustable mounting locations. (See installation instructions for MR16 mounting detail). Aircraft Cable supplied with 5" (127mm) power and 2" (50.8mm) non-power canopies. Refer to installation instructions for appropriate ceiling detail. Canopies are painted white unless otherwise specified.

LED: 25°C test environment. Lumen output/wattage has a margin of +/- 5%; 2' or 3' lengths may have a greater wattage deviation. Luminaire configurations tested in accordance with IES LM-79. Diodes tested in accordance with IES LM-80. Lifetime calculated using IES TM-21. Minimum lifetime greater than 60,000 hours. Lifetime Projection L70 = 275,000 hours and L90 = 83,000 hours. MacAdam 3-Step Ellipses. For all available IES files, please visit our website at pinnacle-ltg.com.

CRI, CCT & Lumen Output: Not all lumen packages available. Three lumen packages available. Standard, High (HO) and Very High (VHO). Custom outputs are available. Specify custom lumens or watts between standard offering listed on CRI, CCT & Output page. 80 CRI is available for 3000K, 3500K, and 4000K. 90 CRI is available for 2700K, 3000K, 3500K and 4000K. 90 CRI = R9≥50.

Voltage: Universal (U), 120 volt (1), 277 volt (2) and 347 volt (3) options available. Must specify PL4 or OL4 in Driver section when 347 volt (3) is selected. Some EDGE configurations will not accommodate all voltage options; consult with factory.

Driver: Standard Driver Option is Factory Select Driver 0-10V, 1% = FSD. Electronic driver, Power factor is >0.9 with a THD <20%. Driver Lifetime: 50,000 hours at 25°C ambient operating conditions. Ambient operating range: -20°F/-30°C to 115°F/46°C. For more driver options, see Pinnacle Resource Guide. Some EDGE configurations will not accommodate all driver options.

Circuiting: Select from single circuit (1), Multi circuit (M), Emergency circuit (E) or Night Light circuit (N). For emergency circuiting situations that require no through wire or circuit separation, Life Safety Circuit should be selected. This will provide a separate power feed and only the Life Safety Circuit in that section. Some Evolution configurations will not accommodate all circuiting options; consult with factory.

Battery & Emergency: Select battery or emergency options if required. If battery or emergency option is not required, enter 0. Battery duration is 90 minutes as standard. Test button is remote to fixture. For more Battery options, see Pinnacle Resource Guide.

Finish: Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes or for additional custom color and finish options.

Buy America Act (BAA) and Build America, Buy America Act (BABA) Compliance: BAA and/or BABA compliance options are available to support federally funded projects requiring domestic content. Availability depends on configuration; Compliance is configuration-dependent; consult factory for confirmation.

Labels: UL and cUL Listed. All lumen packages are IC Rated, approved for dry/damp location unless otherwise noted.

Sustainability: All models are Living Building Challenge (LBC) Declared with third-party verification. The Declare Label from ILFI provides transparent insights into materials, sourcing, and environmental impact, promoting informed, sustainable choices that benefit both people and the planet. View the label [here](#).

Warranty: EDGE LED offered with a 5-year limited warranty. Covers LED, driver and fixture.