

# EDGE EX3DWW

3" Suspended Direct Linear Wall Wash

## Key Features

- 6063-T5 Extruded aluminum housing
- Extruded aluminum module with micro reflector for perfect wall washing illumination
- Wiring access available through bottom of housing
- 5-year limited warranty covers LED, driver and fixture
- UL and cUL listed
- Approved for dry/damp location unless otherwise noted
- Product transparency with third-party verified Living Building Challenge (LBC) Declared



**Declare.**



Example Part #: EX3D-WW-N-830HO-26'-AC48G1-U-FSD-1-0-W

**EX3D - WW - N** - CRI, CCT & OUTPUT - LENGTH OR PATTERN - MOUNTING - VOLTAGE - DRIVER - CIRCUITING - BATTERY & EMERGENCY - FINISH - FIXTURE OPTIONS

WW	N	-----	-----
DIRECT SHIELDING	INDIRECT SHIELDING	CRI, CCT & OUTPUT <sup>1</sup>	LENGTH <sup>2</sup>
<b>WW</b> - Wall Wash <i>Shielding pg. 2</i>	<b>N</b> - None <i>Shielding pg. 2</i>	<b>_27_</b> - 2700K <b>_30_</b> - 3000K <b>_35_</b> - 3500K <b>_40_</b> - 4000K <b>CL</b> - Custom Lumens <b>CW</b> - Custom Watts <i>Lumen Output pg. 2</i>	<b>_ _</b> - Individual Fixture <b>_ _</b> - Continuous Row <i>Length pg. 2</i>
-----	-----	-----	-----
MOUNTING <sup>3</sup>	VOLTAGE	DRIVER	CIRCUITING
<b>_AC_ _G_</b> - (M)AC to Grid <b>_AC_ _JB</b> - (M)AC to J Box <b>_AC_ _ST</b> - (M)AC to Structure <b>_AC5_ _G_</b> - 5" Non-Power Canopy <b>_AC5_ _JB</b> - 5" Non-Power Canopy <b>_SQ_ _G_</b> - 5" Square Canopy <b>_SQ_ _JB</b> - 5" Square Canopy <b>S</b> - Surface Mount <i>Mounting pg. 3</i>	<b>U</b> - Universal (120 thru 277V) <b>1</b> - 120V <b>2</b> - 277V <b>3</b> - 347V <i>Voltage pg. 3</i>	<b>FSD</b> - Factory Select Driver (1%, 0-10v) <b>PL2</b> - Advance Xitanium (1%, 0-10v) <b>PL4</b> - Advance Xitanium 347v (1%, 0-10v) <b>EE1</b> - eldoLED ECOdrive (1%, 0-10v) <b>ES1</b> - eldoLED SOLOdrive (0.1%, 0-10v) <b>LH1</b> - Lutron Hi-lume (1%, EcoSystem) <b>PS1</b> - Advance Xitanium (50%/100%) <b>OL2</b> - eldoLED Optotronic (1%, 0-10v) <i>Driver pg. 3</i>	<b>1</b> - Single Circuit <b>M</b> - Multi Circuit <b>E</b> - Emergency ( <i>entire fixture</i> ) <b>N</b> - Night Light ( <i>entire fixture</i> ) <i>Circuiting pg. 4</i>
-----	-----	-----	-----
BATTERY & EMERGENCY <sup>4</sup>	FINISH	FIXTURE OPTIONS <sup>5</sup>	CONTROLS
<b>0</b> - None <b>_FSG</b> - Factory Select ALCR <b>_FSB</b> - Factory Select Battery <b>_GI</b> - Iota ETS DR <b>_GB</b> - Bodine GTD <b>_PLL</b> - Bodine 10W <b>_ILL</b> - Iota 10W Integral <b>E</b> - Emergency Section <b>N</b> - Night Light Section <b>L</b> - Life Safety Section <i>Battery and Emergency pg. 4</i>	<b>W</b> - White <b>S</b> - Metallic Silver <b>BL</b> - Textured Black <b>BR</b> - Bronze <b>GR</b> - Graphite <b>CC</b> - Custom Color <i>Finish pg. 4</i>	<b>TC</b> - Top Cover <b>DSP</b> - Customer Supplied Battery/Driver/ Sensor <b>BA</b> - Buy America(n) Act and/or Build America Buy America Compliant Fixture <i>Options pg. 4</i>	<i>Pinnacle is able to accommodate different control solutions from different manufacturers. Consult Factory for more information.</i>

<sup>1</sup>When specifying SOURCE the first \_ is for specifying either 8 - 80CRI, or 9 - 90CRI. The ending \_ \_ are for specifying output, example HO - High Output. <sup>2</sup>Individual fixtures come in 2', 3', 4', 5', 6', 7' & 8' lengths. Continuous row come in 1' increments. <sup>3</sup>Specify AC Cable: Standard single AC = AC or Movable AC = MAC; Specify AC length standard AC is 48"; Specify grid: G1=15/16", G9=9/16", GS=Screw Slot. Example: AC48G1 <sup>4</sup>Enter quantity for Battery and Emergency, Example 2PLL. <sup>5</sup>Compliance is configuration dependent; consult factory for confirmation.


Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



## Direct Shielding

**WW**

Wall Wash



## Indirect Shielding

**N**

None

## Output

- Specify either 80 or 90 CRI
- Longer lead-time may apply for 90 CRI. Consult factory.
- 90 CRI = R9≥50

## Custom Output- Lumens OR Wattage

<b>CL</b> _____	Specify CRI, CCT and desired lumens (i.e. CL835400)	Max Lumens: 1074lm/ft. Max lumens dependent on color temp. Consult factory for more information
<b>CW</b> _____	Specify CRI, CCT and desired wattage (i.e. CW9407)	Max Watts: 14.8 watts/ft. Consult factory for more information.

### 80 CRI

	Color	Lumens per foot	Shielding <b>WW</b> Wall Wash LPW	Watts/ft
<b>830</b>	3000K	500	69	7.2
<b>830HO</b>	3000K	750	68	11.1
<b>830VHO</b>	3000K	N/A		
<b>835</b>	3500K	500	73	6.8
<b>835HO</b>	3500K	750	72	10.4
<b>835VHO</b>	3500K	1000	70	14.4
<b>840</b>	4000K	500	76	6.5
<b>840HO</b>	4000K	750	75	10.0
<b>840VHO</b>	4000K	1000	73	13.8

### 90 CRI

<b>927</b>	2700K	500	57	8.8
<b>927HO</b>	2700K	750	55	13.7
<b>927VHO</b>	2700K	N/A		
<b>930</b>	3000K	500	62	8.0
<b>930HO</b>	3000K	750	61	12.3
<b>930VHO</b>	3000K	N/A		
<b>935</b>	3500K	500	65	7.7
<b>935HO</b>	3500K	750	64	11.8
<b>935VHO</b>	3500K	N/A		
<b>940</b>	4000K	500	63	8.0
<b>940HO</b>	4000K	750	61	12.3
<b>940VHO</b>	4000K	N/A		

## Length

- All individual units cannot be joined, end plates are factory installed and cannot be removed
- For Continuous Runs, add 1/2" (12.7mm) to the overall length of the row to account for end plates

2	3	4	5	6	7	8	—
Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Cont. Run Specify nominal overall row length to the 1'
24" (609.6mm)							
36" (914.4mm)							
48" (1219.2mm)							
60" (1524mm)							
72" (1828.8mm)							
84" (2133.6mm)							
96" (2438.4mm)							

Specify to the 1' >>>

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568

EX3DWW\_LED\_SPEC\_DECEMBER2025




## Mounting

- Specify cable length in ordering code (AC48G1)
- Standard 48" adjustable cable. Specify up to 350"
- End plates and power cord attached at factory
- Aircraft cable (AC) mounts on 4" (1219.2mm) and 8" (2438.4mm) centers
- Aircraft Cable supplied with 5" (127mm) power and 2" (50.8mm) non-power canopies

- Canopies and pendants match fixture finish, power cords are white or black depending on fixture finish. See Finish section for additional details
- Approved for dry/damp location unless otherwise noted
- Refer to installation instructions during installation at the job site
- Maximum fixture weight is 10 lbs for a standard 4' fixture
- Designed to be 12"-18" away from wall for optimal performance

<b>AC_G1</b>	Aircraft Cable 1" (15/16") T-Bar
<b>AC_G9</b>	Aircraft Cable 9/16" T-Bar
<b>AC_GS</b>	Aircraft Cable Screw Slot T-Bar
<b>AC_JB</b>	Aircraft Cable Junction Box
<b>AC_ST</b>	Aircraft Cable Structure
<b>AC5_G</b>	Aircraft Cable 5" (127mm) Non-Power Canopy
<b>AC5_JB</b>	Aircraft Cable 5" (127mm) Non-Power Canopy
<b>SQ_G</b>	Aircraft Cable 5" (127mm) Square Canopy
<b>SQ_JB</b>	Aircraft Cable 5" (127mm) Square Canopy
<b>MAC_G1</b>	Movable AC 1" (15/16") T-Bar
<b>MAC_G9</b>	Movable AC 9/16" T-Bar
<b>MAC_GS</b>	Movable AC Screw Slot T-Bar
<b>MAC_JB</b>	Movable AC Junction Box
<b>MAC_ST</b>	Movable AC Structure
<b>MAC5_G</b>	Movable AC 5" (127mm) Non-Power Canopy
<b>MAC5_JB</b>	Movable AC 5" (127mm) Non-Power Canopy
<b>MSQ_G</b>	Movable AC 5" (127mm) Square Canopy
<b>MSQ_JB</b>	Movable AC 5" (127mm) Square Canopy
<b>S</b>	Surface Mount

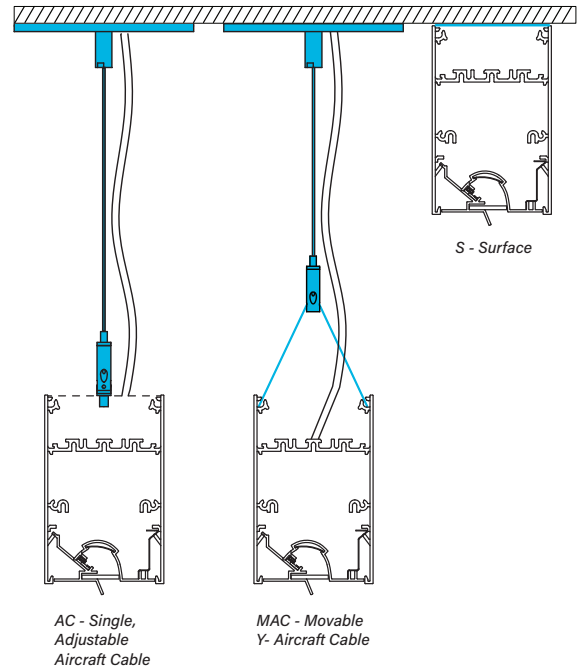

## Voltage

- Some EX3DWW configurations will not accommodate all voltage options; consult with factory

<b>U</b>	Universal
<b>1</b>	120 volt
<b>2</b>	277 volt
<b>3</b>	347 volt

## Driver

- Standard Driver Option = FSD
- Driver Lifetime: 50,000 hours at 25°C ambient operating conditions
- For more driver options see Pinnacle Resource Guide
- Some EX3DWW configurations will not accommodate all driver options; consult wit factory

0-10V Drivers	
<b>FSD</b>	Factory Select Driver 1%, 0-10v
<b>PL2</b>	Signify Advance Xitanium 1%, 0-10v
<b>PL4</b>	Advance Xitanium 347v 1%, 0-10v, requires 347v
<b>OL2</b>	eldoLED Optotronic, 1%, 0-10v
<b>OL4</b>	eldoLED Optotronic 347v, 1% 0-10v, requires 347v option
<b>EE1</b>	eldoLED ECOdrive 1%, 0-10v Logarithmic
<b>EE2</b>	eldoLED ECOdrive 1%, 0-10v Linear
<b>ES1</b>	eldoLED SOLOdrive 0-10v, 0.1% Logarithmic
<b>ES2</b>	eldoLED SOLOdrive 0-10v, 0.1% Linear
DALI Drivers	
<b>EE3</b>	eldoLED ECOdrive 1%, DALI 2, Logarithmic, DT6
<b>ES3</b>	eldoLED SOLOdrive 0.1%, DALI 2, Logarithmic, DT6
Lutron Drivers	
<b>LH1</b>	Lutron Hi-lume Soft-on, Fade-to-black 1%, EcoSystem, LDE1
Alternate Drivers	
<b>PS1</b>	Advance Xitanium Step Dimming 50%/100%
<b>EH1</b>	ERP 1%, Line Voltage and ELV, requires 120v



## How to specify Circuiting, Battery and Emergency

- 1
  - Select fixture circuiting from options below
  - Some EX3DWW configurations will not accommodate all circuiting options, consult with factory

### Circuiting

<b>1</b>	Single Circuit
<b>M</b>	Multi Circuit
<b>E</b>	Emergency Circuit only
<b>N</b>	Night Light Circuit only

- 2 + 3
  - Battery and emergency section options are available in addition to fixture circuit
  - Select battery and emergency section options below; factory shop drawing required
  - Some EX3DWW configurations will not accommodate all circuiting options, consult with factory

### Battery and/or Emergency If Required

- 0 No battery or specific emergency section required

#### Battery

- Select battery section type if required, indicate total QTY. *Example 2PLL*
- 90 minute battery runtime; test button is remote to fixture and requires an additional drop
- No battery option available for 2' lengths
- Entire direct fixture housing is on battery for lengths up to 5'
- Half of direct fixture is on battery for 6' or 8' housing lengths
- For more battery options available, see Pinnacle Resource Guide

<b>0</b>	No Battery
<b>_FSB</b>	Factory Select Battery (10w option)
<b>_FSBST</b>	Factory Select Battery (10w, Self Testing)
<b>_ILL</b>	10w Integral Lithium, Self Testing
<b>_PLL</b>	Bodine 10w Integral Lithium, Self Testing

#### For Approximate Battery Lumen Output

- Multiply battery wattage X fixture LPW shown on Lumen Table
- 92.3 (LPW) x 10 (watts) = 923 battery lumen output

#### Emergency

- Select emergency section type if required, indicate total QTY. *Example 1E*
- Combine battery and emergency section ordering codes if both options are selected

<b>_FSG</b>	Factory Select Automatic Load Control Relay (ALCR), UNV
<b>_GI</b>	
<b>_GB</b>	Bodine GTD, Generator Transfer Device, 120v or 277v
<b>_E</b>	Emergency circuit section
<b>_N</b>	Night Light circuit section
<b>_L</b>	Life Safety circuit section NO THROUGH WIRE

#### Battery OR Emergency Ordering Examples

- Single circuit, 10w Integral Battery      Ordering Code: 1-1P
- Emergency only, 10w Integral Battery      Ordering Code: E-1P
- Single circuit, GTD required      Ordering Code: 1-1G

### Finish

- Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes
- Selecting a fixture finish other than white may impact lumen output; consult factory for more information

<b>W</b>	White ( <i>white cord/white canopy</i> )
<b>S</b>	Metallic Silver ( <i>white cord/silver canopy</i> )
<b>BL</b>	Textured Black ( <i>black cord/black canopy</i> )
<b>BR</b>	Bronze ( <i>white cord/bronze canopy</i> )
<b>GR</b>	Graphite ( <i>white cord/graphite canopy</i> )
<b>CC</b>	Custom Color ( <i>white cord/color match canopy</i> )

### Fixture Options

- Additional options to enhance the fixture and finish of the product

<b>TC</b>	Top Cover
<b>DSP</b>	Customer Supplied Battery/Driver/Sensor

- Domestic content option - compliance is configuration dependent; consult factory for conformation

<b>BA</b>	Buy America(n) Act and/or Build America Buy America Compliant
-----------	---

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568

EX3DWW\_LED\_SPEC\_DECEMBER2025




## Controls

- Pinnacle is able to accommodate different control solutions from different manufacturers. Consult Factory for more information.

## Photometrics

### Wall Wash

Test #	KPL2015-7
Catalog #	EX3D-WW-840VHO-4
Lumens	3799 lm
Watts	51.7 W
Efficacy	73.5 LPW



### Candela Distribution

Vert Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	2101	2101	2101	2101	2101
5	2684	2617	2513	2345	2111
10	3085	3019	2845	2533	2083
15	3116	3086	2999	2658	2036
20	2757	2823	2935	2699	1972
25	2241	2353	2652	2640	1886
30	1787	1888	2249	2481	1773
35	1377	1484	1847	2237	1638
40	1050	1147	1472	1929	1471
45	815	882	1150	1584	1288
50	650	690	885	1255	1079
55	538	560	681	981	855
60	469	473	530	735	639
65	423	413	423	534	439
70	395	382	366	383	278
75	372	355	321	281	155
80	348	327	281	212	79
85	312	292	239	158	37
90	0	0	0	0	0

### Luminance Data (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	38711	54665	61218
55	31528	39880	50105
65	33627	33599	34869
75	48292	41724	20148
85	120282	92100	14162

For all available IES files, please visit our website at [pinnacle-ltg.com](http://pinnacle-ltg.com). Photometry testing in accordance to IESNA-LM-79-08 at an NVLAP or IAS accredited testing laboratory. Testing conducted at 25°C ambient conditions

## Applications & Certificates

**Construction:** 6063-T5 Extruded aluminum housing.

**Shielding:** Extruded aluminum module with micro reflector for perfect wall wash illumination.

**Mounting:** Aircraft cable, wall and surface mount available. Select from 2 aircraft cable options. Select the straight aircraft cable that mounts on 4'-0" (1219.2mm) and 8'-0" (2438.4mm) centers or the movable adjustable Y-cable mount. The Y-Cable design allows for adjustable mounting locations. (See installation instructions for MR16 mounting detail). Aircraft Cable supplied with 5" (127mm) power and 2" (50.8mm) non-power canopies. Refer to installation instructions for appropriate ceiling detail. Canopies are painted white unless otherwise specified.

**LED:** 25°C test environment. Lumen output/wattage has a margin of +/- 5%; 2' or 3' lengths may have a greater wattage deviation. Luminaire configurations tested in accordance with IES LM-79. Diodes tested in accordance with IES LM-80. Lifetime calculated using IES TM-21. Minimum lifetime greater than 60,000 hours. Lifetime Projection L70 = 275,000 hours and L90 = 83,000 hours. MacAdam 3-Step Ellipses. For all available IES files, please visit our website at [pinnacle-ltg.com](http://pinnacle-ltg.com).

**CRI, CCT & Lumen Output:** Not all lumen packages available. Three lumen packages available. Standard, High (HO) and Very High (VHO). Custom outputs are available. Specify custom lumens or watts between standard offering listed on CRI, CCT & Output page. 80 CRI is available for 3000K, 3500K, and 4000K. 90 CRI is available for 2700K, 3000K, 3500K and 4000K. 90 CRI = R9≥50.

**Voltage:** Universal (U), 120 volt (1), 277 volt (2) and 347 volt (3) options available. Must specify PL4 or OL4 in Driver section when 347 volt (3) is selected. Some EDGE configurations will not accommodate all voltage options; consult with factory.

**Driver:** Standard Driver Option is Factory Select Driver 0-10V, 1% = FSD. Electronic driver, Power factor is >0.9 with a THD <20%. Driver Lifetime: 50,000 hours at 25°C ambient operating conditions. Ambient operating range: -20°F/-30°C to 115°F/46°C. For more driver options, see Pinnacle Resource Guide. Some EDGE configurations will not accommodate all driver options.

**Circuiting:** Select from single circuit (1), Multi circuit (M), Emergency circuit (E) or Night Light circuit (N). For emergency circuiting situations that require no through wire or circuit separation, Life Safety Circuit should be selected. This will provide a separate power feed and only the Life Safety Circuit in that section. Some Evolution configurations will not accommodate all circuiting options; consult with factory.

**Battery & Emergency:** Select battery or emergency options if required. If battery or emergency option is not required, enter 0. Battery duration is 90 minutes as standard. Test button is remote to fixture. For more Battery options, see Pinnacle Resource Guide.

**Finish:** Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes or for additional custom color and finish options.

**Buy America Act (BAA) and Build America, Buy America Act (BABA) Compliance:** BAA and/or BABA compliance options are available to support federally funded projects requiring domestic content. Availability depends on configuration; Compliance is configuration-dependent; consult factory for confirmation.

**Labels:** UL and cUL Listed. All lumen packages are IC Rated, approved for dry/damp location unless otherwise noted.

**Sustainability:** All models are Living Building Challenge (LBC) Declared with third-party verification. The Declare Label from ILFI provides transparent insights into materials, sourcing, and environmental impact, promoting informed, sustainable choices that benefit both people and the planet. View the label [here](#).

**Warranty:** EDGE LED offered with a 5-year limited warranty. Covers LED, driver and fixture.