

# EDGE MINI

## 1" x 2" Suspended Direct Linear

### Key Features

- Co-extruded 1.5" lens delivers smooth, uniform lines of light
- Multiple shielding and lensing options for controlled light distributions
- Available with integral or remote driver configurations
- Pattern flexibility through illuminated connectors or non-illuminated hubs
- Complete family available in suspended, surface, wall, and recessed applications



Example Part #: EX12D-HE-N-830HO-26'-AC48G1-U-FSD-1-0-W

**EX12D** - **---** - **N** - **---** - **---** - **---** - **---** - **---** - **---** - **---** - **---** - **---**

DIRECT SHIELDING    INDIRECT SHIELDING    CRI, CCT & OUTPUT    LENGTH OR PATTERN    MOUNTING    VOLTAGE    DRIVER    CIRCUITING    BATTERY & EMERGENCY    FINISH

---	N	---	---
DIRECT SHIELDING	INDIRECT SHIELDING	SOURCE <sup>1</sup>	LENGTH OR PATTERN <sup>2</sup>
<b>A</b> - Satine Lens <b>HE</b> - High Efficiency Lens <b>BW</b> - Batwing Insert <b>WHE</b> - Asymmetric Insert <b>HED</b> - Descant Lens <i>Shielding pg. 2</i>	<b>N</b> - None <i>Shielding pg. 2</i>	<b>_27_</b> - 2700K <b>_30_</b> - 3000K <b>_35_</b> - 3500K <b>_40_</b> - 4000K <b>CL</b> - Custom Lumens <b>CW</b> - Custom Watts <b>MOD</b> - Mod options available <i>Lumen Output pg. 2</i>	<b>_ _</b> - Individual Fixture <b>_ _ _</b> - Continuous Row  <i>Illuminated Connectors</i> <b>S</b> - Square <b>R_X_X</b> - Rectangle <b>U_X_X_X</b> - U-Shape <b>L_X_X</b> - L Shape <b>T_X_X_X</b> - T-Shape <b>X_X_X_X_X</b> - X-Shape  <i>Non-Illuminated Hubs</i> <b>HS</b> - Square <b>HR_X_X</b> - Rectangle <b>HU_X_X_X</b> - U-Shape <b>HL_X_X</b> - L Shape <b>HT_X_X_X</b> - T-Shape <b>HX_X_X_X_X</b> - X-Shape <b>HTR</b> - Triangle <b>HH</b> - Hexagon <b>HY_X_X_X</b> - Y-Shape  <b>MOD</b> - Mod options available <i>Length and Pattern pg. 3</i>

-----	-	---	-
MOUNTING <sup>3</sup>	VOLTAGE	DRIVER	CIRCUITING
<b>AC_G</b> - AC to Grid <b>AC_JB</b> - AC to J Box <b>AC_ST</b> - AC to Structure <b>WA</b> - Wall Mount <b>S</b> - Surface Mount <b>AC5_G</b> - 5" Non-Power Canopy <b>AC5_JB</b> - 5" Non-Power Canopy <b>SQ_G</b> - 5" Square Canopy <b>SQ_JB</b> - 5" Square Canopy <i>Mounting pg. 4</i>	<b>U</b> - Universal (120 thru 277V) <b>1</b> - 120V <b>2</b> - 277V <b>3</b> - 347V <i>Voltage pg. 4</i>	<i>Integral Driver</i> <b>EL1</b> - ERP Power (1%, 0-10v, 120v or 277v) <i>Remote Drivers</i> <b>FSD</b> - Factory Select Driver (1%, 0-10v) <b>PL2</b> - Advance Xitanium (1%, 0-10v) <b>OL2</b> - eldoLED (1%, 0-10v) <b>EE1</b> - eldoLED ECOdrive (1%, 0-10v) <b>ES1</b> - eldoLED SOLOdrive (0.1%, 0-10v) <b>LH1</b> - Lutron Hi-lume (1%, EcoSystem) <i>Driver pg. 4</i>	<b>1</b> - Single Circuit <b>M</b> - Multi Circuit <b>E</b> - Emergency (entire fixture) <b>N</b> - Night Light (entire fixture) <i>Circuiting pg. 5</i>

---	---	---
BATTERY & EMERGENCY <sup>4</sup>	FINISH	FIXTURE OPTIONS <sup>5</sup>
<b>0</b> - None <b>FBS</b> - Factory Select Battery <b>FSG</b> - Factory Select ALCR <b>GI</b> - Iota ETS DR <b>GB</b> - Bodine GTD <b>ILL</b> - Iota 10w Integral <b>PLL</b> - Bodine 10W <i>Battery and Emergency pg. 5</i>	<b>W</b> - White <b>S</b> - Metallic Silver <b>BL</b> - Textured Black <b>BR</b> - Bronze <b>GR</b> - Graphite <b>CC</b> - Custom Color <i>Finish pg. 5</i>	<b>BA</b> - Buy America(n) Act and/or Build America Buy America Compliant


<sup>1</sup>When specifying CRI- CCT & OUTPUT the first \_ is for specifying either **8** - 80CRI or **9** - 90CRI. The ending \_ \_ are for specifying output, example **HO** - High Output. See output charts for more information. <sup>2</sup>Individual fixtures come in 2', 3', 4', 5', 6', 7', & 8' lengths. Continuous row come in 1' increments. Patterns can use either an illuminated connector or a non-illuminated hub (**H**) see page 3 for more information and availability. For patterns specify pattern shape and overall dimensions. Example: L6x4: L pattern that is 6'x4'. <sup>3</sup>Specify AC length standard (AC is 48"); Specify grid: G1=15/16", G9=9/16", GS=Screw Slot; All EX12 fixtures require a remote driver. Distance from Remote Box to Fixture cannot exceed 10ft. Based on the size and application of the remote box, specify RB (Remote Box) or RC (Remote Canopy) at the end of the Mounting portion of the part number. See page 3 for details. <sup>4</sup>Enter quantity for Battery and Emergency, Example 2PLL. <sup>5</sup>Compliance is configuration dependent; consult factory for confirmation.

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



## Shielding

### DIRECT

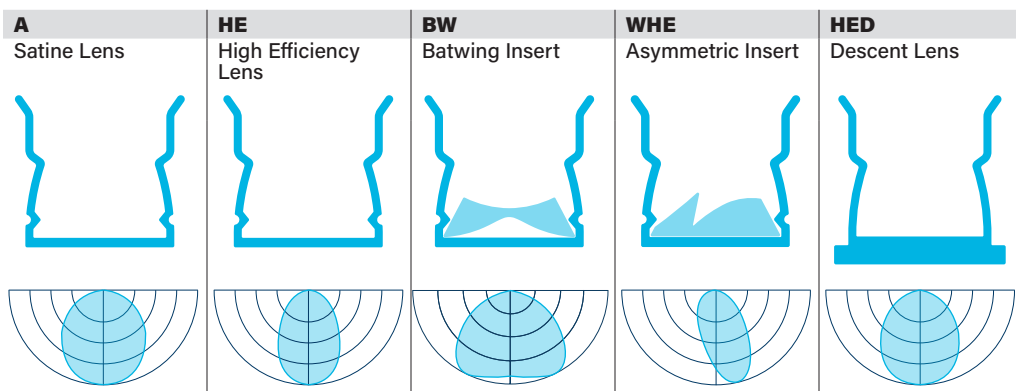

### INDIRECT

N  
None

## Output

- Specify either 80 or 90 CRI
- Longer lead-time may apply for 90 CRI. Consult factory.
- 90 CRI = R9≥50

## Custom Output - Lumens OR Wattage

<b>CL</b> _____	Specify CRI, CCT and desired lumens (i.e. CL835600)	Specify lumens between standard offering listed below. Lumens are specified per color temp
<b>CW</b> _____	Specify CRI, CCT and desired wattage (i.e. CW9407)	Specify lumens between standard offering listed below. Lumens are specified per color temp

### Direct 80 CRI

	Color	Lumens per foot	Shielding											
			A Satine Lens		HE High Efficiency		BW Batwing		WHE Asymmetric		P Louver		HED Descent	
			LPW	Watts/ft	LPW	Watts/ft	LPW	Watts/ft	LPW	Watts/ft	LPW	Watts/ft	LPW	Watts/ft
<b>830</b>	3000K	500	92	5.4	116	4.3	84	5.9	101	4.9	73	6.9	102	4.9
<b>830HO</b>	3000K	750	94	8.0	115	6.5	86	8.7	103	7.3	73	10.3	101	7.4
<b>830VHO</b>	3000K	1000	93	10.7	118	8.5	84	11.9	105	9.5	70	14.3	103	9.7
<b>835</b>	3500K	500	95	5.2	119	4.2	87	5.8	105	4.8	73	6.8	103	4.9
<b>835HO</b>	3500K	750	97	7.7	119	6.3	88	8.5	107	7.0	75	10.0	105	7.2
<b>835VHO</b>	3500K	1000	97	10.4	122	8.2	87	11.5	107	9.3	73	13.8	106	9.4
<b>840</b>	4000K	500	95	5.2	119	4.2	87	5.8	105	4.8	73	6.8	103	4.9
<b>840HO</b>	4000K	750	97	7.7	119	6.3	88	8.5	107	7.0	75	10.0	105	7.2
<b>840VHO</b>	4000K	1000	97	10.4	122	8.2	87	11.5	107	9.3	73	13.8	106	9.4

### Direct 90 CRI

<b>927</b>	2700K	500	74	6.7	96	5.2	70	7.2	84	6.0	60	8.4	82	6.1
<b>927HO</b>	2700K	750	77	9.8	97	7.7	70	10.7	86	8.8	58	12.9	84	9.0
<b>927VHO</b>	2700K	1000	74	13.5	97	10.3	68	14.6	84	12.0	N/A		82	12.2
<b>930</b>	3000K	500	81	6.1	102	4.9	74	6.7	91	5.5	65	7.7	89	5.6
<b>930HO</b>	3000K	750	83	9.0	104	7.2	77	9.8	93	8.1	64	11.8	91	8.2
<b>930VHO</b>	3000K	1000	81	12.3	106	9.4	74	13.5	93	10.8	63	16.0	91	11.0
<b>935</b>	3500K	500	81	6.2	102	4.9	74	6.8	91	5.5	65	7.7	89	5.6
<b>935HO</b>	3500K	750	83	9.1	104	7.2	76	9.8	93	8.1	63	11.8	91	8.3
<b>935VHO</b>	3500K	1000	81	12.4	106	9.5	74	13.6	92	10.8	62	16.1	90	11.1
<b>940</b>	4000K	500	81	6.2	102	4.9	74	6.8	91	5.5	65	7.7	89	5.6
<b>940HO</b>	4000K	750	83	9.1	104	7.2	76	9.8	93	8.1	63	11.8	91	8.3
<b>940VHO</b>	4000K	1000	81	12.4	106	9.5	74	13.6	92	10.8	62	16.1	90	11.1

## Direct Source: MOD Options

- Specify **MOD** in the part number for any of the below options
- All RGB\_ Source Options will require specific driver and control
- Consult factory for **MOD** specification details, pricing, and lead-time information

**MOD** TIR Optics



**Length**

- All individual units cannot be joined, end plates are factory installed and cannot be removed
- For Continuous Runs, 1/2" (12.7mm) to the overall length of the row to account for end caps

2	3	4	5	6	7	8	-
Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Cont. Run <i>Specify nominal overall row length to the 1'</i>
24" (609.6mm)	36" (914.4mm)	48" (1219.2mm)	60" (1524mm)	72" (1828.8mm)	84" (2133.6mm)	96" (2438.4mm)	
							Specify to the 1' >>>

**Patterns**



**Pattern - Illuminated Connectors**

- Specify pattern shape and dimensions per leg(s)
- All illuminated connectors are direct only
- Length specified will reflect overall pattern dimensions
- Angles and shapes not shown require MOD Pattern; consult factory
- For MOD patterns factory drawings and sign off required

S_	R_x	U_x_x	L_x	T_x	X_x
Square Provide A dimension Example: S4'	Rectangle Provide AxB dimensions Example: R6'x4'	U-Shape Provide AxBxC dimensions Example: U6'x4'x6'	L-Shape Provide AxB dimensions Example: L4'x3'	T-Shape Provide AxBxC dimensions Example: T6'x8'	X-Shape Provide AxBxCxD dimensions Example: X6'x6'

**Pattern - Non Illuminated Hubs**

- Specify pattern shape and dimensions per leg(s)
- Length specified will not reflect overall pattern dimensions
- Patterns cannot be used with S mounting
- Angles and shapes not shown require MOD Pattern; consult factory
- For MOD patterns factory drawings and sign off required
- Got to page 6 to sketch multi Hub layout

HS_	HR_x	HTR_	HH_	HU_x_x	HL_x	HY_x	HT_x	HX_x
Square Hub Provide A dimension Example: HS4	Rectangle Hub Provide AxB dimensions Example: HR4x2	Triangle Hub Provide A dimension Example: HTR4	Hexagon Hub Provide A dimension Example: HH4	U-Shape Hub Provide AxBxC dimensions Example: HU3x4x3	L-Shape Hub Provide AxB dimensions Example: HL3x3	Y-Shape Hub Provide AxBxC dimensions Example: HY3x3x3	T-Shape Hub Provide AxBxC dimensions Example: HT3x5	X-Shape Hub Provide AxBxCxD dimensions Example: X3x3

Illuminated Connector Details			Non-illuminated Hub Details					
			<b>H90</b> 90° Hub	<b>HTR</b> Triangle Hub	<b>HH</b> Hexagon Hub	<b>HY</b> Y-Shape Hub	<b>HT</b> T-Shape Hub	<b>HX</b> X-Shape Hub

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568




## Mounting

- Specify cable length in ordering code (AC48G1)
- Standard specifiable lengths are 48", 120", 240" and 350"
- End plates and power cord attached at factory
- Aircraft cable (AC) mounts on 4' (1219.2mm) and 8' (2438.4mm) centers
- Aircraft Cable supplied with 5" (127mm) power and 2" (50.8mm) non-power canopies
- Canopies are painted to match fixture finish, power cords are white or black depending on fixture finish. See Finish section for additional details
- Approved for dry/damp location unless otherwise noted, PAC NOT rated for dry/damp

<b>AC_G1</b>	Aircraft Cable 1" (15/16") T-Bar
<b>AC_G9</b>	Aircraft Cable 9/16" T-Bar
<b>AC_GS</b>	Aircraft Cable Screw Slot T-Bar
<b>AC_JB</b>	Aircraft Cable Junction Box
<b>AC_ST</b>	Aircraft Cable Structure
<b>AC5_G</b>	Aircraft Cable 5" (127mm) Non-Power Canopy
<b>AC5_JB</b>	Aircraft Cable 5" (127mm) Non-Power Canopy
<b>SQ_G</b>	Aircraft Cable 5" (127mm) Square Canopy
<b>SQ_JB</b>	Aircraft Cable 5" (127mm) Square Canopy
<b>WA</b>	Wall Mount
<b>S</b>	Surface Mount

- Refer to installation instructions during installation at the job site
- Maximum fixture weight is 20 lbs for a standard 4' fixture
- Remote box will be included for all specifications that include batteries, GTD, or a driver OTHER THAN the EL1. See Installation Instructions for more specific information about mounting

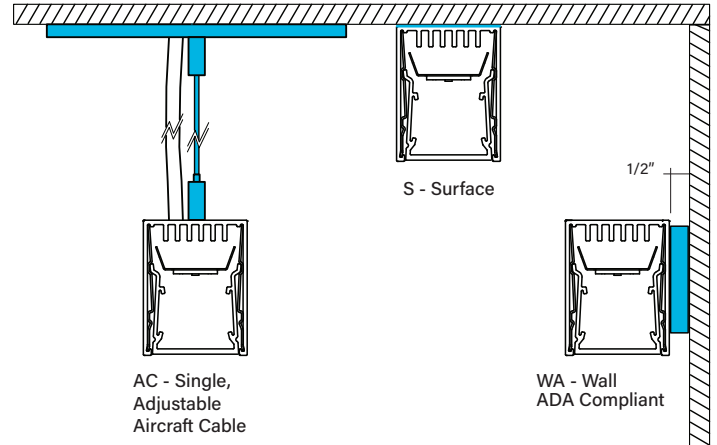

## Voltage


- Some EX12 configurations will not accommodate all voltage options; consult with factory

<b>U</b>	Universal
<b>1</b>	120 volt
<b>2</b>	277 volt
<b>3</b>	347 volt


## Driver

- Standard Driver Option = EL1
- Driver Lifetime: 50,000 hours at 25°C ambient operating conditions
- For more driver options, see Pinnacle Resource Guide
- Some EX12D configurations will not accommodate all driver options; consult with factory
- EL1 driver is integral to the fixture housing. Remote box necessary for all drivers OTHER THAN the EL1 OR WITH BATTERY OPTION
- Osram and Lutron Drivers have a remote distance limitation of 10'
- eldoLED and Advance Drivers have an average remote distance limitation of 50'. Consult Factory for specific configurations

Slim Remote Box



Standard Remote Box



## Integral Driver

<b>EL1</b>	ERP Power 1%, 0-10v, requires 120 or 277
------------	--

## Remote Driver

### 0-10V Drivers

<b>FSD</b>	Factory Select Driver (1%, 0-10v)
<b>PL2</b>	Signify Advance Xitanium 1%, 0-10v
<b>PL4</b>	Advance Xitanium 347v 1%, 0-10v, requires 347v
<b>OL2</b>	eldoLED Optotronic, 1%, 0-10v
<b>OL4</b>	eldoLED Optotronic 347v, 1% 0-10v, requires 347v option
<b>EE1</b>	eldoLED ECOdrive 1%, 0-10v Logarithmic
<b>EE2</b>	eldoLED ECOdrive 1%, 0-10v Linear
<b>ES1</b>	eldoLED SOLOdrive 0-10v, 0.1% Logarithmic
<b>ES2</b>	eldoLED SOLOdrive 0-10v, 0.1% Linear

### DALI Drivers

<b>EE3</b>	eldoLED ECOdrive .1%, DALI (logarithmic)
<b>ES3</b>	eldoLED SOLOdrive .1%, DALI (logarithmic)
<b>OD1</b>	eldoLED Optotronic 1%, DEXAL

### Lutron Drivers

<b>LH1</b>	Lutron Hi-lume Soft-on, Fade-to-black 1%, EcoSystem, LDE1
------------	---

### Alternate Drivers

<b>PS1</b>	Signify Advance Xitanium Step Dimming 50/100%
<b>EH1</b>	ELV 120v only, 0-10v universal

## Slim Remote Box

Standard Output (STD),  
High Output (HO)

Standard Output (STD),  
High Output (HO)

All Configurations

All Configurations

## Standard Remote Box

Very High Output (VHO), 90CRI  
Options

Very High Output (VHO), 90CRI  
Options

N/A

N/A

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568

EX12D\_LED\_SPEC\_JANUARY2026



## How to specify Circuiting, Battery and Emergency

- 1**
- Select fixture circuiting from options below
  - Some EX12D configurations will not accommodate all circuiting options, consult with factory

### Circuiting

<b>1</b>	Single Circuit
<b>M</b>	Multi Circuit
<b>E</b>	Emergency Circuit only
<b>N</b>	Night Light Circuit only

- 2** + **3**
- Battery and emergency section options are available in addition to fixture circuit
  - Select battery and emergency section options below; factory shop drawing required
  - Some EX12D configurations will not accommodate all circuiting options, consult with factory

### Battery and/or Emergency If Required

- 0** No battery or specific emergency section required

### Battery

- Battery will be remote mounted with driver.
- Select battery section type if required, indicate total QTY. *Example 2PL*
- 90 minute battery runtime; test button is remote to fixture and requires an additional drop

- Battery not available for lengths under 4'
- Entire direct fixture housing is on battery for lengths up to 5'
- Half of direct fixture is on battery for 6', 7' or 8' housing lengths
- For more battery options available, see Pinnacle Resource Guide

<b>0</b>	No Battery
<b>_FSB</b>	Factory Select Battery (10w option, remote in box)
<b>_FSBST</b>	Factory Select Battery (10w, Self Testing, remote in box)
<b>_PLL</b>	Bodine 10w Integral (remote in box)
<b>_ILL</b>	Iota 10w Integral (Self Testing, remote in box)
<b>_PRH</b>	Bodine 20W (remote with conduit)
<b>_IRH</b>	Iota 20W (remote with conduit)

#### For Approximate Battery Lumen Output

- Multiply battery wattage X fixture LPW shown on Lumen Table
- 92.3 (LPW) x 10 (watts) = 923 battery lumen output

### Emergency

- Select emergency section type if required, indicate total QTY. *Example 1E*
- Combine battery and emergency section ordering codes if both options are selected

<b>_FSG</b>	Factory Select ALCR, Emergency Control Device, UNV
<b>_GI</b>	Iota ETS-DR, Emergency Transfer Switch, UNV
<b>_GB</b>	Bodine GTD, Generator Transfer Device, 120v or 277v
<b>_E</b>	Emergency circuit section
<b>_N</b>	Night Light circuit section
<b>_L</b>	Life Safety circuit section NO THROUGH WIRE

#### Battery OR Emergency Ordering Examples

- Single circuit, 10w Integral Battery      Ordering Code: 1-1PL
- Emergency only, 10w Integral Battery      Ordering Code: E-1PLL
- Single circuit, GTD required              Ordering Code: 1-1GB

### Finish

- Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes
- Selecting a fixture finish other than white may impact lumen output; consult factory for more information

<b>W</b>	White (white cord/white canopy)
<b>S</b>	Metallic Silver (white cord/silver canopy)
<b>BL</b>	Textured Black (black cord/black canopy)
<b>BR</b>	Bronze (white cord/bronze canopy)
<b>GR</b>	Graphite (white cord/graphite canopy)
<b>CC</b>	Custom Color (white cord/color match canopy)

### Fixture Options

- Domestic content option - compliance is configuration dependent; consult factory for conformation

<b>BA</b>	Buy America(n) Act and/or Build America Buy America Compliant
-----------	---

### Controls

- Pinnacle is able to accommodate different control solutions from different manufacturers. Consult Factory for more information.



Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568



## Multi Hub Layout

- Use the below to sketch your desired pattern. Available hubs are listed in the legend. Label your pattern components according to legend to simplify specification.
- Label the linear sections with fixture/run length.
- Cannot use connector with another connector.
- All lengths are to the foot only.
- Pinnacle will create factory drawings based off sketch to confirm dimensions and layout.

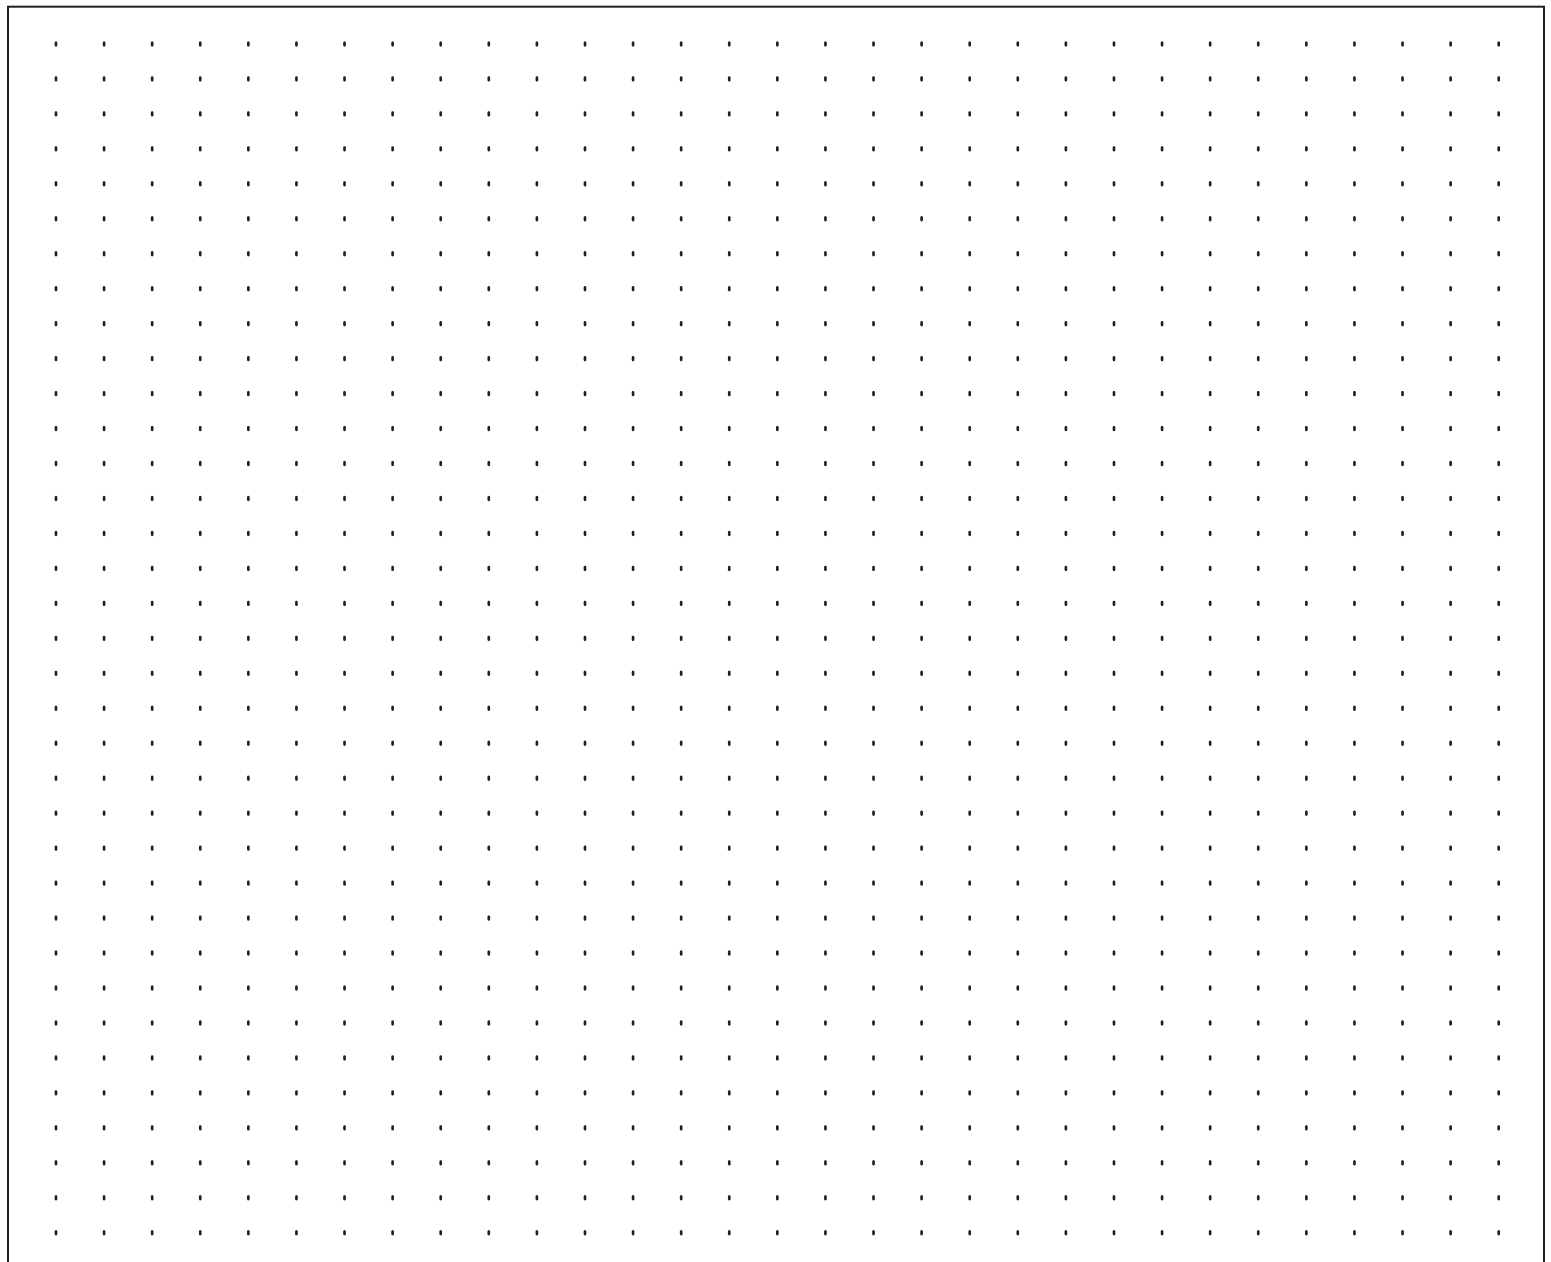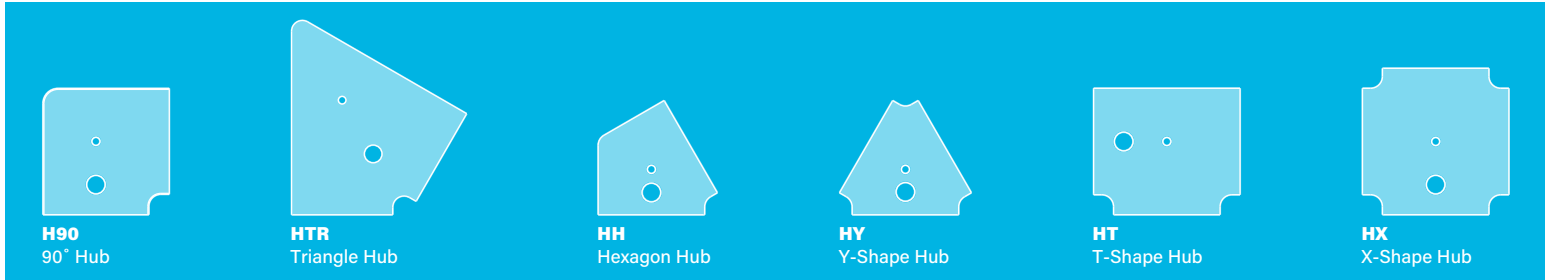


*Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.*



Photometrics

High Efficiency Lens

Test # Scaled from KPL2015-57  
 Catalog # EX12D-A-840VHO-4  
 Lumens 3819  
 Watts 39.7  
 Efficacy 96 LPW



Candela Distribution

Vert Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	1337	1337	1337	1337	1337
5	1325	1337	1328	1330	1329
10	1308	1320	1310	1312	1311
15	1279	1290	1280	1281	1280
20	1239	1249	1240	1240	1239
25	1189	1197	1189	1186	1186
30	1128	1136	1128	1123	1122
35	1059	1068	1057	1053	1052
40	983	986	978	972	970
45	899	899	892	883	881
50	806	805	796	789	769
55	704	705	696	687	685
60	599	597	590	580	581
65	491	488	477	470	470
70	375	373	365	359	357
75	258	258	250	247	245
80	153	150	146	143	145
85	66	64	61	59	58
90	0	0	0	0	0

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	28469	28277	27921
55	27516	27172	26738
65	26044	25293	24939
75	22355	21618	21227
85	17058	15632	14873

For all available IES files, please visit our website at [pinnacle-ltg.com](http://pinnacle-ltg.com). Photometry testing in accordance to IESNA-LM-79-08 at an NVLAP or IAS accredited testing laboratory. Testing conducted at 25°C ambient conditions

Applications & Certificates

**Construction:** 6063-T5 Extruded aluminum housing. Highly reflective die-formed white painted reflector.

**Shielding:** Diffuse snap-in acrylic lens with matte finish, removable for maintenance.

**Mounting:** Aircraft cable, wall and surface mount available. The aircraft cable that mounts on 4'-0" (1219.2mm) and 8'-0" (2438.4mm) centers. Aircraft Cable supplied with 5" (127mm) power and 2" (50.8mm) non-power canopies. Refer to installation instructions for appropriate ceiling detail. Canopies are painted white unless otherwise specified. Maximum fixture weight is 10 lbs for a standard 4' fixture.

**LED:** 25°C test environment. Lumen output/wattage has a margin of +/- 5%; 2' or 3' lengths may have a greater wattage deviation. Luminaire configurations tested in accordance with IES LM-79. Diodes tested in accordance with IES LM-80. Lifetime calculated using IES TM-21. Minimum lifetime greater than 60,000 hours. Lifetime Projection L70 = 254,800 hours and L90 = 80,200 hours. MacAdam 3-Step Ellipses. For all available IES files, please visit our website at [pinnacle-ltg.com](http://pinnacle-ltg.com).

**CRI, CCT & Output:** Not all lumen packages available. Three lumen packages available. Standard, High (HO) and Very High (VHO). Custom outputs are available. Specify custom lumens or watts between standard offering listed on CRI, CCT & Output page. 80 CRI is available for 3000K, 3500K, and 4000K. 90 CRI is available for 2700K, 3000K, 3500K and 4000K. 90 CRI = R9≥50.

**Voltage:** Universal (U), 120 volt (1), 277 volt (2) and 347 volt (3) options available. Must specify PL4 or OL4 in Driver section when 347 volt (3) is selected. Some EDGE configurations will not accommodate all voltage options; consult with factory.

**Driver:** Standard INTEGRAL Driver Option is EL1. All other driver options will be in remote box. EL1 designed for use with 120v or 277v only. Electronic driver, Power factor is >0.9 with a THD <20%. Driver Lifetime: 50,000 hours at 25°C ambient operating conditions. Ambient operating range: -20°F/-30°C to 128°F/54°C. When ND is specified, a spec grade driver will be provided. For more driver options, see Pinnacle Resource Guide. Some configurations will not accommodate all driver options.

**Circuiting:** Select from single circuit (1), Multi circuit (M), Emergency circuit (E) or Night Light circuit (N). For emergency circuiting situations that require no through wire or circuit separation, Life Safety Circuit should be selected. This will provide a separate power feed and only the Life Safety Circuit in that section. Some EX configurations will not accommodate all circuiting options; consult with factory.

**Battery & Emergency:** Select battery or emergency options if required. If battery or emergency option is not required, enter 0. Battery duration is 90 minutes as standard. Test button is remote to fixture. For more Battery options, see Pinnacle Resource Guide.

**Finish:** Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes. Contact factory for additional custom color and finish options.

**Controls:** Mod options available, consult with factory.

**Buy America Act (BAA) and Build America, Buy America Act (BABA) Compliance:** BAA and/or BABA compliance options are available to support federally funded projects requiring domestic content. Availability depends on configuration; Compliance is configuration-dependent; consult factory for confirmation.

**Labels:** UL and cUL 1598 listed. Standard and HO lumen packages are approved for dry/damp location unless otherwise noted.

**Fixture Weight:** Maximum fixture weight is 10 lbs for a standard 4' fixture.

**Warranty:** EX LED offered with a 5-year limited warranty. Covers LED, driver and fixture.