



10 DAY  
*QUICK* SHIP →

PINNACLE  
ARCHITECTURAL LIGHTING®

A brand of  legrand




# EDGE

Sample Part # EV3D-HE-830-24'-G1-U-FSD-1-0-W-QS

QS must be listed at the end of the part number¹

EV2D / 3D / 4D

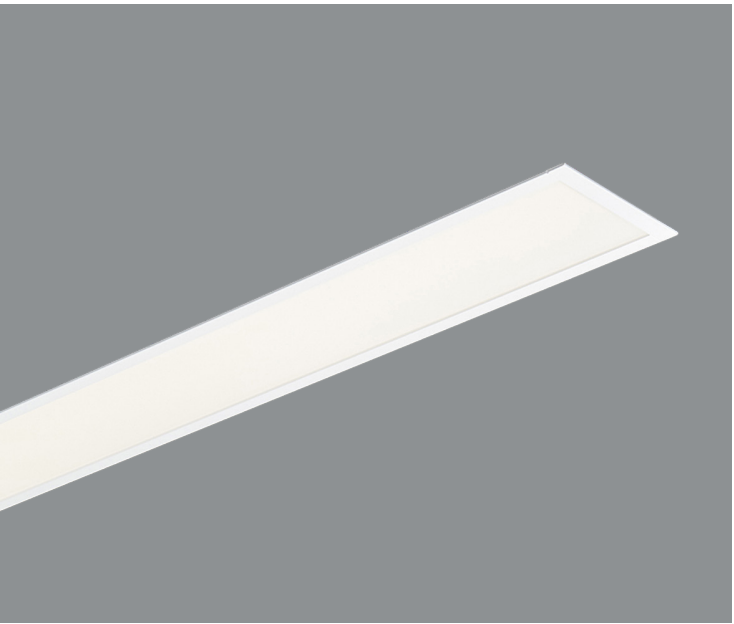

| Shielding |            | CRI, CCT & Output² |                                                                              | Length or Pattern³ |                        | Mounting |                | Voltage |                     | Driver |                                 | Circuiting⁴ |                | Battery⁴ |                        | Finish |       | Options |                                  |
|-----------|------------|--------------------|------------------------------------------------------------------------------|--------------------|------------------------|----------|----------------|---------|---------------------|--------|---------------------------------|-------------|----------------|----------|------------------------|--------|-------|---------|----------------------------------|
| A         | Satine     | 8----              | 80 CRI only. All color temperatures, all lumen packages listed on spec sheet | _                  | Individual Fixture     | G1(G)    | 1" T-Bar       | U       | Universal (120-277) | FSD    | Factory Select Driver 1%, 0-10v | 1           | Single Circuit | 0        | None                   | W      | White | CP      | Chicago Plenum                   |
| HE        | High       |                    |                                                                              | --                 | Cont. Row (to an 1/8") | G9(G)    | 9/16" T-Bar    | 1       | 120V                |        |                                 | E           | Emergency      | FSB      | Factory Select Battery |        |       | FIL     | Field Cut Illuminated Extensions |
| BW        | Batwing    |                    |                                                                              | L_X_               | L-shape                | GS(G)    | Screw Slot     | 2       | 277V                |        |                                 | N           | Night Light    |          |                        |        |       | GLR     | Internal Fast Blow Fuse          |
| WHE       | Asymmetric | CL                 | Custom Lumens                                                                | R_X_               | Rectangle              | FL(F)    | 1/2" Flange    |         |                     |        |                                 |             |                |          |                        |        |       |         |                                  |
|           |            | CW                 | Custom Watts                                                                 | S_                 | Square                 | NF(N)    | Flangeless     |         |                     |        |                                 |             |                |          |                        |        |       |         |                                  |
|           |            |                    |                                                                              | U_X_               | U-shape                | SF(S)    | Spackle Flange |         |                     |        |                                 |             |                |          |                        |        |       |         |                                  |
|           |            |                    |                                                                              | WC                 | Wall to ceiling        |          |                |         |                     |        |                                 |             |                |          |                        |        |       |         |                                  |

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

EVL / EVLS



| CRI, CCT & Output² |                                                                              | Length |                        | Mounting |                | Voltage |                     | Driver |                                 | Circuiting⁴ |                | Battery⁴ |                        | Finish |       | Options |                         |
|--------------------|------------------------------------------------------------------------------|--------|------------------------|----------|----------------|---------|---------------------|--------|---------------------------------|-------------|----------------|----------|------------------------|--------|-------|---------|-------------------------|
| 8----              | 80 CRI only. All color temperatures, all lumen packages listed on spec sheet | _      | Individual Fixture     | G1(G)    | 1" T-Bar       | U       | Universal (120-277) | FSD    | Factory Select Driver 1%, 0-10v | 1           | Single Circuit | 0        | None                   | W      | White | CP      | Chicago Plenum          |
|                    |                                                                              | --     | Cont. Row(to the foot) | G9(G)    | 9/16" T-Bar    | 1       | 120V                |        |                                 | E           | Emergency      | FSB      | Factory Select Battery |        |       | GLR     | Internal Fast Blow Fuse |
| CL                 | Custom Lumens                                                                |        |                        | GS(G)    | Screw Slot     | 2       | 277V                |        |                                 | N           | Night Light    |          |                        |        |       | EF      | End Filler              |
| CW                 | Custom Watts                                                                 |        |                        | FL(F)    | 1/2" Flange    |         |                     |        |                                 |             |                |          |                        |        |       |         |                         |
|                    |                                                                              |        |                        | NF(N)    | Flangeless     |         |                     |        |                                 |             |                |          |                        |        |       |         |                         |
|                    |                                                                              |        |                        | SF(S)    | Spackle Flange |         |                     |        |                                 |             |                |          |                        |        |       |         |                         |

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

# EDGE PM

Sample Part # EV3D-HE-830-24'-G1-U-FSD-1-0-W-QS

QS must be listed at the end of the part number¹

EV2DPM / EV3DPM / EV4DPM



| Housing |                       | Shielding |                      | CRI, CCT, Output |                                                         | Length and Pattern |                        | Mounting |                | Voltage |                     | Driver |                       | Circuiting |                | Battery |                        | Finish |       | Fixture Options |                         |
|---------|-----------------------|-----------|----------------------|------------------|---------------------------------------------------------|--------------------|------------------------|----------|----------------|---------|---------------------|--------|-----------------------|------------|----------------|---------|------------------------|--------|-------|-----------------|-------------------------|
| EV_DPM  | Perimeter, Flush      | A         | Satine Lens          | 8_ _ _ _         | 80 CRI only. All color temperatures, all lumen packages | _                  | Individual Fixture     | G1       | 1" T-Bar       | U       | Universal (120-277) | FSD    | Factory Select Driver | 1          | Single Circuit | 0       | None                   | W      | White | FIL             | Field Cut Extension     |
| EV_DPM2 | Perimeter, 2" Regress | HE        | High Efficiency Lens | CL               | Custom Lumens                                           | _ _                | Cont. Row (to an 1/8") | G9       | 9/16" T-Bar    | 1       | 120V                |        |                       | E          | Emergency      | FSB     | Factory Select Battery |        |       | CP              | Chicago Plenum          |
| EV_DPM3 | Perimeter, 3" Regress | WHE       | Asymmetric Lens      | CW               | Custom Watts                                            | SI_                | Inside Square          | GS       | Screw Slot     | 2       | 277V                |        |                       | N          | Night Light    |         |                        |        |       | GLR             | Internal Fast Blow Fuse |
| EV_DPM4 | Perimeter 4" Regress  |           |                      |                  |                                                         | SO_                | Outside Square         | FL       | 1/2" Flange    |         |                     |        |                       |            |                |         |                        |        |       |                 |                         |
|         |                       |           |                      |                  |                                                         | RI_                | Inside Rectangle       | NF       | Flangeless     |         |                     |        |                       |            |                |         |                        |        |       |                 |                         |
|         |                       |           |                      |                  |                                                         | RO_                | Outside Rectangle      | SF       | Spackle Flange |         |                     |        |                       |            |                |         |                        |        |       |                 |                         |
|         |                       |           |                      |                  |                                                         | UI_                | Inside U shape         |          |                |         |                     |        |                       |            |                |         |                        |        |       |                 |                         |
|         |                       |           |                      |                  |                                                         | UO_                | Outside U shape        |          |                |         |                     |        |                       |            |                |         |                        |        |       |                 |                         |
|         |                       |           |                      |                  |                                                         | LI_                | Inside L shape         |          |                |         |                     |        |                       |            |                |         |                        |        |       |                 |                         |
|         |                       |           |                      |                  |                                                         | LO_                | Outside L shape        |          |                |         |                     |        |                       |            |                |         |                        |        |       |                 |                         |


All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

# EDGE EX

Sample Part # EX3D-HE-N-830-24'-AC48G1-U-FSD-1-0-W-QS

QS must be listed at the end of the part number¹

EX2D / 3D / 4D  
EX2DI / 3DI / 4DI  
EX2I / 3I / 4I

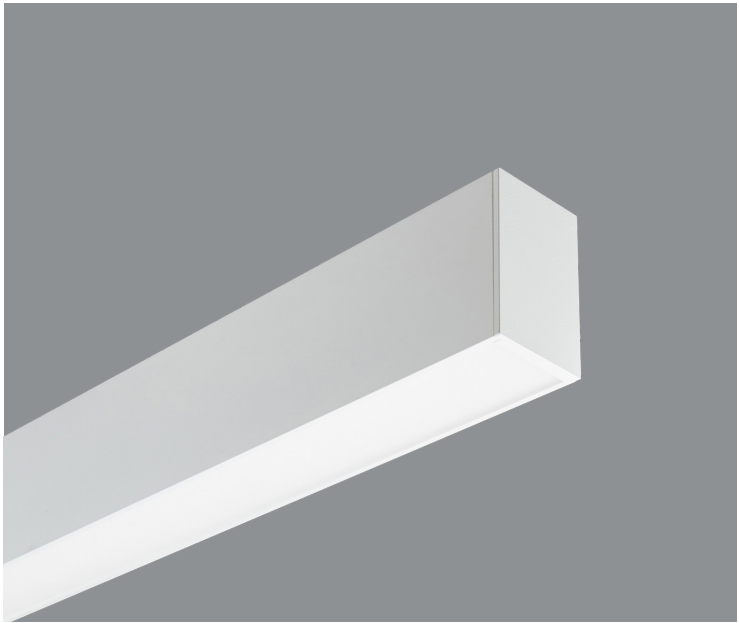

### Direct Shielding

|     |                               |
|-----|-------------------------------|
| V   | Satine                        |
| HE  | High Efficiency               |
| BW  | Batwing                       |
| WHE | Asymmetric                    |
| N   | None<br>Indirect fixture only |

### Indirect Shielding

|     |                                            |
|-----|--------------------------------------------|
| HE  | High Efficiency                            |
| BW  | Batwing                                    |
| WHE | Asymmetric                                 |
| N   | None<br><small>Direct fixture only</small> |

### CRI, CCT & Output²

|          |                                                                              |
|----------|------------------------------------------------------------------------------|
| 8_ _ _ _ | 80 CRI only. All color temperatures, all lumen packages listed on spec sheet |
| CL       | Custom Lumens                                                                |
| CW       | Custom Watts                                                                 |

### Length or Pattern³

|       |                         |
|-------|-------------------------|
| _     | Individual Fixture      |
| _ _ _ | Cont. Row (to the foot) |
| L_X_  | L-shape                 |
| R_X_  | Rectangle               |
| S_    | Square                  |
| U_X_  | U-shape                 |

### Mounting

|           |              |
|-----------|--------------|
| (M)C48G_  | Grid         |
| (M)AC48JB | Junction Box |
| (M)AC48ST | Structure    |
| WA        | Wall         |
| S         | Surface      |

### Voltage

|   |                     |
|---|---------------------|
| U | Universal (120-277) |
| 1 | 120V                |
| 2 | 277V                |

### Driver

|     |                                 |
|-----|---------------------------------|
| FSD | Factory Select Driver 1%, 0-10v |
|-----|---------------------------------|

### Circuiting⁴

|   |                |
|---|----------------|
| 1 | Single Circuit |
| E | Emergency      |
| N | Night Light    |

### Battery⁴

|     |                        |
|-----|------------------------|
| 0   | None                   |
| FSB | Factory Select Battery |

### Finish

|    |                |
|----|----------------|
| W  | White          |
| S  | Silver         |
| BL | Textured Black |

### Options

|     |                         |
|-----|-------------------------|
| GLR | Internal Fast Blow Fuse |
|-----|-------------------------|

¹ All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Black QuickShip only available in 4', 6', and 8' individual lengths. Consult factory for larger projects.

# ADEO/LUCEN

## Architectural Recessed

Sample Part # AD22-A-830-G1-U-FSD-1-0-W-QS  
QS must be listed at the end of the part number<sup>1</sup>

<sup>1</sup>Quick Ship items must be on their own purchase order. QS must be listed at the end of the part number to qualify for the Quick Ship timeline. Orders submitted without QS at the end of the part number will be entered with a standard lead-time. <sup>2</sup> Custom outputs are also included, but they must be between the high and low outputs listed on the Spec Sheets. <sup>3</sup> Maximum of 12 inside corners and 12 horizontal corners per Quick Ship order. <sup>4</sup> Submittal drawing required for all Battery Packs, Emergency Circuits, patterns, and continuous row configurations. <sup>5</sup> End filler option used for fitting fixture into odd lengths. Filler is non-illuminated. Left and right end filler provided with EF specified. Please consult factory for orders with more than 25 end fillers.

AD22

LU22



Shielding

**A** Satine

CRI, CCT & Output <sup>2</sup>

**8** 80 CRI only. All color temperatures, all lumen packages listed on spec sheet

**CL** Custom Lumens  
**CW** CustomWatts

Mounting

**G1** 1" T-Bar  
**G9** 9/16" T-Bar  
**GS** Screw Slot

Voltage

**U** Universal (120-277)  
**1** 120V  
**2** 277V

Driver

**FSD** Factory Select Driver 1%, 0-10v

Circuiting <sup>4</sup>

**1** Single Circuit  
**E** Emergency  
**N** Night Light

Battery <sup>4</sup>

**0** None  
**FSB** Factory Select Battery

Finish

**W** White

Options

**CP** Chicago Plenum  
**GLR** Internal Fast Blow Fuse  
**FW6** 6', 18-gauge, Flex Whip

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

AD24

LU24



Shielding

**A** Satine

**W**  
**S**

CRI, CCT & Output <sup>2</sup>

**8** 80 CRI only. All color temperatures, all lumen packages listed on spec sheet

**CL** Custom Lumens  
**CW** CustomWatts

Mounting

**G1** 1" T-Bar  
**G9** 9/16" T-Bar  
**GS** Screw Slot

Voltage

**U** Universal (120-277)  
**1** 120V  
**2** 277V

Driver

**FSD** Factory Select Driver 1%, 0-10v

Circuiting <sup>4</sup>

**1** Single Circuit  
**E** Emergency  
**N** Night Light

Battery <sup>4</sup>

**0** None  
**FSB** Factory Select Battery

Finish

**W** White

Options

**CP** Chicago Plenum  
**GLR** Internal Fast Blow Fuse  
**FW6** 6', 18-gauge, Flex Whip

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

AD14

LU14



Shielding

**A** Satine

**W**  
**S**

CRI, CCT & Output <sup>2</sup>

**8** 80 CRI only. All color temperatures, all lumen packages listed on spec sheet

**CL** Custom Lumens  
**CW** CustomWatts

Mounting

**G1** 1" T-Bar  
**G9** 9/16" T-Bar  
**GS** Screw Slot

Voltage

**U** Universal (120-277)  
**1** 120V  
**2** 277V

Driver

**FSD** Factory Select Driver 1%, 0-10v

Circuiting <sup>4</sup>

**1** Single Circuit  
**E** Emergency  
**N** Night Light

Battery <sup>4</sup>

**0** None  
**FSB** Factory Select Battery

Finish

**W** White

Options

**CP** Chicago Plenum  
**GLR** Internal Fast Blow Fuse  
**FW6** 6', 18-gauge, Flex Whip

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

# TRAVERSE


## Architectural Recessed

Sample Part # TR22-W-830-G1-U-FSD-1-0-W-QS

QS must be listed at the end of the part number<sup>1</sup>

<sup>1</sup>Quick Ship items must be on their own purchase order. QS must be listed at the end of the part number to qualify for the Quick Ship timeline. Orders submitted without QS at the end of the part number will be entered with a standard lead-time. <sup>2</sup> Custom outputs are also included, but they must be between the high and low outputs listed on the Spec Sheets. <sup>3</sup> Maximum of 12 inside corners and 12 horizontal corners per Quick Ship order. <sup>4</sup> Submittal drawing required for all Battery Packs, Emergency Circuits, patterns, and continuous row configurations. <sup>5</sup> End filler option used for fitting fixture into odd lengths. Filler is non-illuminated. Left and right end filler provided with EF specified. Please consult factory for orders with more than 25 end fillers.

TR22

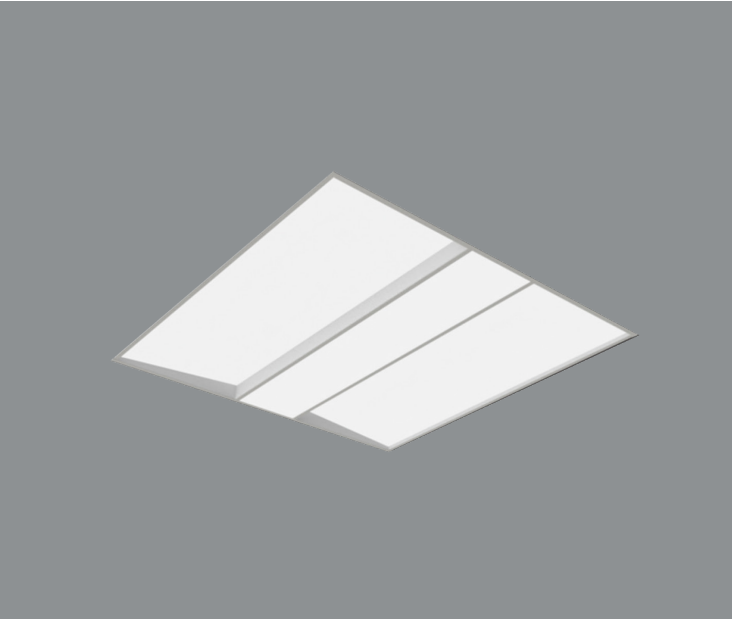

### Shielding

**W** White rails

### CRI, CCT & Output <sup>2</sup>

**8\_ \_ \_ \_** 80 CRI only. All color temperatures, all lumen packages listed on spec sheet

**CL** Custom Lumens  
**CW** CustomWatts

### Mounting

**G1** 1" T-Bar

**G9** 9/16" T-Bar

**GS** Screw Slot

### Voltage

**U** Universal (120-277)

**1** 120V

**2** 277V

### Driver

**FSD** Factory Select Driver  
1%, 0-10v

### Circuiting <sup>4</sup>

**1** Single Circuit

**E** Emergency

**N** Night Light

### Battery <sup>4</sup>

**0** None

**FSB** Factory Select  
Battery

### Finish

**W** White


### Options

**CP** Chicago Plenum

**FW6** 6', 18-gauge, Flex Whip

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

TR24

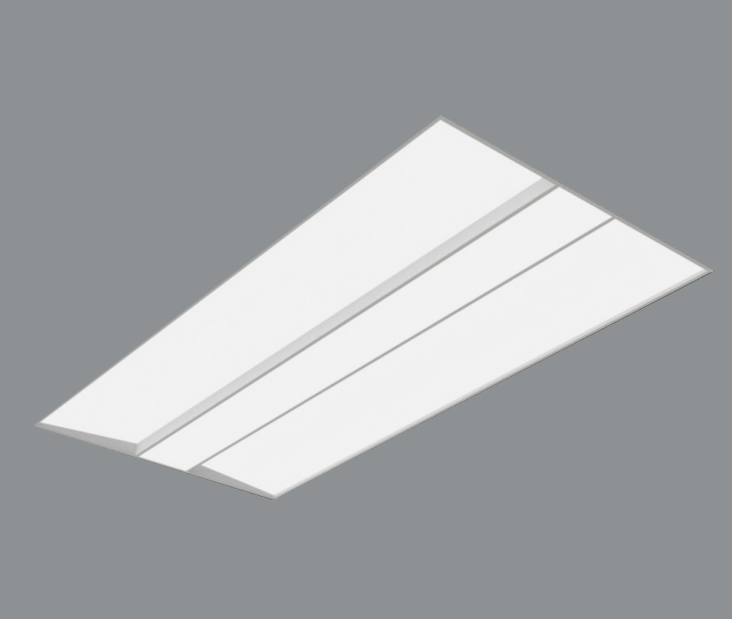

### Shielding

**W** White rails

### CRI, CCT & Output <sup>2</sup>

**8\_ \_ \_ \_** 80 CRI only. All color temperatures, all lumen packages listed on spec sheet

**CL** Custom Lumens  
**CW** CustomWatts

### Mounting

**G1** 1" T-Bar

**G9** 9/16" T-Bar

**GS** Screw Slot

### Voltage

**U** Universal (120-277)

**1** 120V

**2** 277V

### Driver

**FSD** Factory Select Driver  
1%, 0-10v

### Circuiting <sup>4</sup>

**1** Single Circuit

**E** Emergency

**N** Night Light

### Battery <sup>4</sup>

**0** None

**FSB** Factory Select  
Battery

### Finish

**W** White


### Options

**CP** Chicago Plenum

**FW6** 6', 18-gauge, Flex Whip

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

TR14

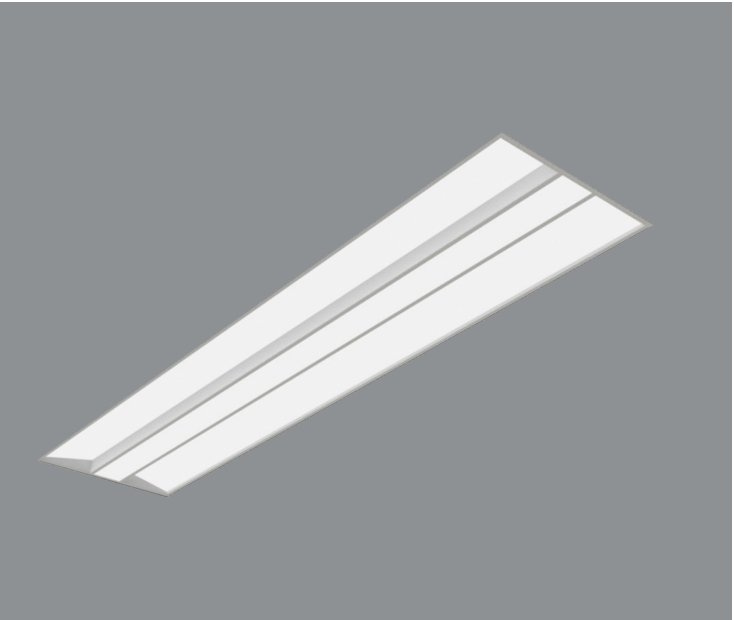

### Shielding

**W** White rails

### CRI, CCT & Output <sup>2</sup>

**8\_ \_ \_ \_** 80 CRI only. All color temperatures, all lumen packages listed on spec sheet

**CL** Custom Lumens  
**CW** CustomWatts

### Mounting

**G1** 1" T-Bar

**G9** 9/16" T-Bar

**GS** Screw Slot

### Voltage

**U** Universal (120-277)

**1** 120V

**2** 277V

### Driver

**FSD** Factory Select Driver  
1%, 0-10v

### Circuiting <sup>4</sup>

**1** Single Circuit

**E** Emergency

**N** Night Light

### Battery <sup>4</sup>

**0** None

**FSB** Factory Select  
Battery

### Finish

**W** White

### Options

**CP** Chicago Plenum

**FW6** 6', 18-gauge, Flex Whip


All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

# COVE

Sample Part # C-830HO-26'-CV-U-FSD-1-0-N-QS

QS must be listed at the end of the part number\*

C

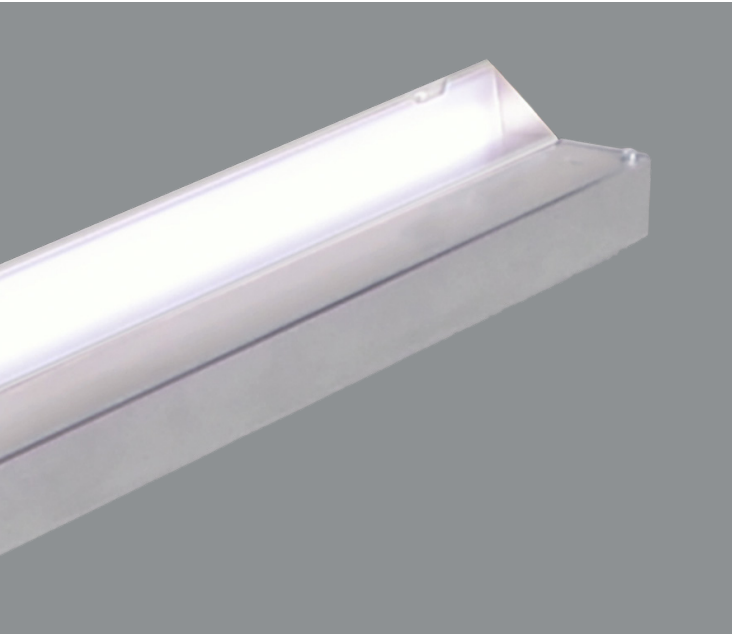

| CRI, CCT & Output <sup>2</sup> |                                                                              | Length |                                         | Mounting  |               | Voltage  |                     | Driver     |                                 | Circuiting <sup>4</sup> |                | Battery <sup>4</sup> |      | Finish   |         |
|--------------------------------|------------------------------------------------------------------------------|--------|-----------------------------------------|-----------|---------------|----------|---------------------|------------|---------------------------------|-------------------------|----------------|----------------------|------|----------|---------|
| <b>8</b>                       | 80 CRI only. All color temperatures, all lumen packages listed on spec sheet | —      | Individual Fixture (2', 3', 4', 6', 8') | <b>CV</b> | COVE Mounting | <b>U</b> | Universal (120-277) | <b>FSD</b> | Factory Select Driver 1%, 0-10v | <b>1</b>                | Single Circuit | <b>0</b>             | None | <b>N</b> | Natural |
|                                |                                                                              | —      | Cont. Row (in 1' increments)            |           |               | <b>1</b> | 120V                |            |                                 | <b>E</b>                | Emergency      |                      |      |          |         |
| <b>CL</b>                      | Custom Lumens                                                                |        |                                         |           |               | <b>2</b> | 277V                |            |                                 | <b>N</b>                | Night Light    |                      |      |          |         |
| <b>CW</b>                      | Custom Watts                                                                 |        |                                         |           |               |          |                     |            |                                 |                         |                |                      |      |          |         |

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

# LINERO

Sample Part # L6DI-A-830-24'-AC48JB-U-FSD-1-0-W-QS

QS must be listed at the end of the part number¹

L6DI-A



| Distribution |                           | CRI, CCT & Output² |                                                                              | Length or Pattern³ |                       | Mounting |                        | Voltage |                     | Driver |                                 | Circuiting⁴ |                | Battery⁴ |                        | Finish |       |
|--------------|---------------------------|--------------------|------------------------------------------------------------------------------|--------------------|-----------------------|----------|------------------------|---------|---------------------|--------|---------------------------------|-------------|----------------|----------|------------------------|--------|-------|
| 40           | 40% Direct / 60% Indirect | 8_ _ _ _           | 80 CRI only. All color temperatures, all lumen packages listed on spec sheet | _ _                | Individual Fixture    | AC48G_   | Grid                   | U       | Universal (120-277) | FSD    | Factory Select Driver 1%, 0-10v | 1           | Single Circuit | 0        | None                   | W      | White |
| 70           | 70% Direct/ 30% Indirect  |                    |                                                                              | _ _                | Cont. Row (to the ft) | AC48JB   | Junction Box Structure | 1       | 120V                |        |                                 | E           | Emergency      | FSB      | Factory Select Battery |        |       |
| 100          | 100% Direct               |                    |                                                                              |                    |                       | AC48ST   |                        | 2       | 277V                |        |                                 | N           | Night Light    |          |                        |        |       |
|              |                           | CL                 | Custom Lumens                                                                |                    |                       |          |                        |         |                     |        |                                 |             |                |          |                        |        |       |
|              |                           | CW                 | Custom Watts                                                                 |                    |                       |          |                        |         |                     |        |                                 |             |                |          |                        |        |       |

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.

L8DI-A



| Distribution |                           | CRI, CCT & Output² |                                                                              | Length or Pattern³ |                       | Mounting |                        | Voltage |                     | Driver |                                 | Circuiting⁴ |                | Battery⁴ |                        | Finish |       |
|--------------|---------------------------|--------------------|------------------------------------------------------------------------------|--------------------|-----------------------|----------|------------------------|---------|---------------------|--------|---------------------------------|-------------|----------------|----------|------------------------|--------|-------|
| 40           | 40% Direct / 60% Indirect | 8_ _ _ _           | 80 CRI only. All color temperatures, all lumen packages listed on spec sheet | _ _                | Individual Fixture    | AC48G_   | Grid                   | U       | Universal (120-277) | FSD    | Factory Select Driver 1%, 0-10v | 1           | Single Circuit | 0        | None                   | W      | White |
| 70           | 70% Direct/ 30% Indirect  |                    |                                                                              | _ _                | Cont. Row (to the ft) | AC48JB   | Junction Box Structure | 1       | 120V                |        |                                 | E           | Emergency      | FSB      | Factory Select Battery |        |       |
| 100          | 100% Direct               |                    |                                                                              |                    |                       | AC48ST   |                        | 2       | 277V                |        |                                 | N           | Night Light    |          |                        |        |       |
|              |                           | CL                 | Custom Lumens                                                                |                    |                       |          |                        |         |                     |        |                                 |             |                |          |                        |        |       |
|              |                           | CW                 | Custom Watts                                                                 |                    |                       |          |                        |         |                     |        |                                 |             |                |          |                        |        |       |

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.


TESA

Sample Part # T4A-835VHO-16'-AC48G1-U-FSD-1-0-W-QS

QS must be listed at the end of the part number\*



T4A

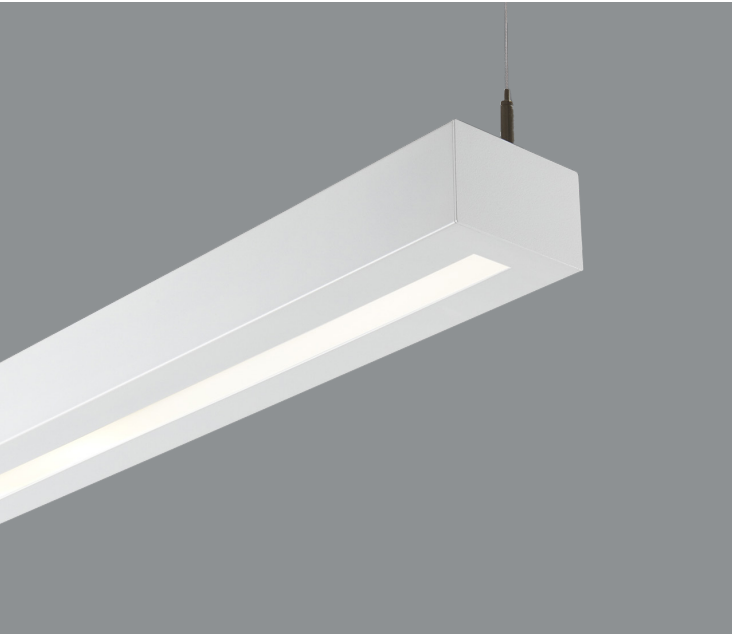

Shielding

**A** Satine

CRI, CCT & Output <sup>2</sup>

**8** 80 CRI only. All color temperatures, all lumen packages listed on spec sheet

**CL** Custom Lumens  
**CW** Custom Watts

Length

**—** Individual Fixture (4', 8')  
**--** Cont. Row (in 4' increments)

Mounting

**AC48G** Grid  
**AC48JB** Junction Box  
**AC48ST** Structure

Voltage

**U** Universal (120-277)  
**1** 120V  
**2** 277V

Driver

**FSD** Factory Select Driver 1%, 0-10v

Circuiting<sup>4</sup>

**1** Single Circuit  
**E** Emergency  
**N** Night Light

Battery<sup>4</sup>

**0** None  
**PLL** Bodine 10w

Finish

**W** White

All lengths and continuous rows up to 1,000 ft OR 150 individual fixtures. Consult factory for larger projects.



**P I N N A C L E**  
ARCHITECTURAL LIGHTING®

3801 Havana St. Denver CO, 80239

Phone: 303.322.5570

[www.pinnacle-ltg.com](http://www.pinnacle-ltg.com)

**August 2026**

© 2026 Pinnacle Architectural  
Lighting®

Specifications and dimensions subject to change without notice. Specification sheets and brochures that appear on [pinnacle-ltg.com](http://pinnacle-ltg.com) are the most recent version and supersede all other previously printed or electronic versions.

A brand of  **legrand®**