

nook
2-1/2" square linear

Key Features

- Room-facing illumination for added vertical light
- 3 mounting options: wall, wall-to-ceiling & vertical corner
- ADA-compliant wall-mounted configurations
- Integral, serviceable driver with 0-10V dimming to 1%
- High output up to 1,000 lm/ft



Example Part #: NK-A-830HO-4'-U-EL1-1-0-W

NK - A - - - - -

SHIELDING CRI, CCT & OUTPUT LENGTH VOLTAGE DRIVER CIRCUITING FINISH


A	-----	--	
SHIELDING	SOURCE¹	LENGTH	MOUNTING
A - Satine Lens <i>In direct or indirect wall mount applications, the lens return creates a subtle side glow. This intentional detail helps reduce shadowing at the wall transition.</i>	_27_ - 2700K LO - 250 lms/ft _30_ - 3000K MO - 500 lms/ft _35_ - 3500K HO - 750 lms/ft _40_ - 4000K VHO - 1000 lms/ft CL ----- - Custom Lumens CW ----- - Custom Watts <i>Source pg. 2</i>	_ _ - Individual Fixture _ _ - Continuous Row <i>Length pg. 3</i>	WC - Wall/Ceiling Corner WD - Wall Direct WI - Wall Indirect WV - Wall Corner Vertical 

—	— — —	—		— —
VOLTAGE	DRIVER	CIRCUITING	BATTERY & EMERGENCY ⁶	FINISH
U - Universal (120 thru 277V) 1 - 120V 2 - 277V 3 - 347V <i>Voltage pg. 3</i>	EL1 - ERP Power (1%, 0-10v, 120v or 277v) <i>REMOTE DRIVERS</i> FSD - Factory Select Driver (1%, 0-10v) PL2 - Advance Xitanium (1%, 0-10v) OL2 - eldoLED Optotronic (1%, 0-10v) OL4 - eldoLED Optotronic 347v (1%, 0-10v) EE1 - eldoLED ECOdrive (1%, 0-10v) ES1 - eldoLED SOLOdrive (0.1%, 0-10v) LH1 - Lutron Hi-Lume (1%, EcoSystem) PR1 - Advance Xitanium SR <i>Driver pg. 4</i>	1 - Single Circuit <i>Circuiting pg. 4</i>	0 - None _FSB - Factory Select Battery _FSG - Factory Select ALCR _GI - Iota ETS DR _GB - Bodine GTD _ILL - Iota 10W _PLL - Bodine 10W <i>Battery and Emergency pg. 5</i>	W - White S - Metallic Silver BL - Textured Black BR - Bronze GR - Graphite CC - Custom Color <i>Finish pg. 5</i>

¹When specifying CRI- CCT & OUTPUT the first _ is for specifying either **8** - 80CRI or **9** - 90CRI. The ending __ are for specifying output, example **HO** - High Output. See output charts for more information.

Shielding

A
Satine Lens



Source

- Specify either 80 or 90 CRI for White light LED
- Longer lead-time may apply for 90 CRI. Consult factory
- 90 CRI = R9≥50

Custom Output - Lumens OR Wattage

CL _____	Specify CRI, CCT and desired lumens (i.e. CL835500)	Specify lumens between standard offering listed below. Lumens are specified per color temp
CW _____	Specify CRI, CCT and desired wattage (i.e. CW9407)	Specify watts between standard offering listed below

80 CRI

	Color	Lumens per foot	Shielding A	
			Satine LPW	Watts/ft
830	3000K	500	131	3.1
830HO		750	133	5.7
830VHO		1000	131	7.6
835	3500K	500	135	3.7
835HO		750	136	5.5
835VHO		1000	134	7.5
840	4000K	500	139	3.6
840HO		750	138	5.4
840VHO		1000	138	7.3

90 CRI

927	2700K	500	106	4.7
927HO		750	105	7.1
927VHO		1000	103	9.7
930	3000K	500	110	4.5
930HO		750	110	6.8
930VHO		1000	107	9.3
935	3500K	500	116	4.3
935HO		750	116	6.5
935VHO		1000	113	8.8
940	4000K	500	120	4.2
940HO		750	120	6.2
940VHO		1000	118	8.5


Length

- For Continuous Runs, add 1/8" (3.2mm) for each end plate or 1/4" (6.4mm) to the overall length of the row

2	3	4	5	6	7	8	-
Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Indiv. Fixture	Cont. Run
24-1/4" (615.9mm)							Specify nominal overall row length to the 1/8" Longer lead-time may apply for lengths to the 1/8". Consult factory.
36-1/4" (920.7mm)							
48-1/4" (1225.5mm)							
60-1/4" (1530.4mm)							
72-1/4" (1835.2mm)							
84-1/4" (2139.9mm)							
96-1/4" (2444.8mm)							
							Specify to the 1/8" >>>

Mounting

WC	Wall/Ceiling
WD	Wall Direct
WI	Wall Indirect
WV	Wall Corner Vertical

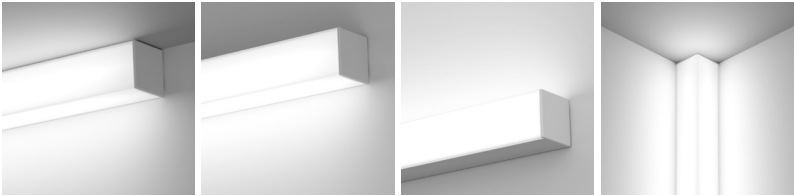

Voltage


- Some NOOK configurations will not accommodate all voltage options; consult with factory
- 347 volt not available with Tunable White (TW) option

U	Universal
1	120 volt
2	277 volt
3	347 volt

Driver

- Standard Driver Option = EL1
- Driver Lifetime: 50,000 hours at 25°C ambient operating conditions
- For more driver options, see Pinnacle Resource Guide
- Some NOOK configurations will not accommodate all driver options; consult with factory
- EL1 driver is integral to the fixture housing.
- Remote box necessary for all drivers OTHER THAN the EL1
- Osram and Lutron Drivers have a remote distance limitation of 10'
- eldoLED and Advance Drivers have an average remote distance limitation of 50'. Consult Factory for specific configurations

Integral Driver	
EL1	ERP Power 1%, 0-10v, requires 120 or 277
Remote Driver	
0-10V Drivers	
FSD	Factory Select Driver 1%, 0-10v
PL2	Advance Xitanium 1%, 0-10v
PL4	Advance Xitanium 347v 1%, 0-10v, requires 347v
OL2	eldoLED Optotronic, 1%, 0-10v
OL4	eldoLED Optotronic 347v, 1% 0-10v, requires 347v
EE1	eldoLED ECOdrive 1%, 0-10v, Logarithmic
EE2	eldoLED ECOdrive 1%, 0-10v, Linear
ES1	eldoLED SOLOdrive 0.1%, 0-10v, Logarithmic
ES2	eldoLED SOLOdrive 0.1%, 0-10v, Linear
DALI Drivers	
EE3	eldoLED ECOdrive .1%, DALI (logarithmic)
ES3	eldoLED SOLOdrive .1%, DALI (logarithmic)
OD1	eldoLED Optotronic 1%, DEXAL
Lutron Drivers	
LH1	Lutron Hi-lume Soft-on, Fade-to-black 1%, EcoSystem, LDE1
Alternate Drivers	
EH1	ELV 120v only, 0-10v universal

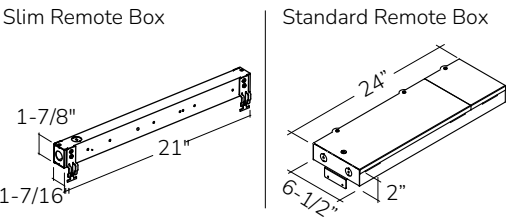

How to Specify Circuiting, Battery and Emergency

- 1
- Select fixture circuiting from options below
 - Some NOOK configurations will not accommodate all circuiting options, consult with factory

Circuiting

1	Single Circuit
E	Emergency Circuit only

- 2 + 3
- Battery and emergency options are available in addition to fixture circuit
 - Full housing required for battery and emergency options
 - Select battery and emergency options below; factory shop drawing required
 - Some NOOK configurations will not accommodate all circuiting options, consult with factory

Battery and/or Emergency If Required

0	No battery or specific emergency required
---	---

Battery

- Battery will be remote mounted with driver and requires standard remote box
- Select battery type if required, indicate total QTY. *Example 2PLL*
- 90 minute battery runtime; test button is remote to fixture and requires an additional drop
- Battery operates full length of housing up to 8' on individual fixtures or within continuous row
- For more battery options available, see Pinnacle Resource Guide

0	No Battery
_FSB	Factory Select 10w Lithium
_FSBST	Factory Select 10w Lithium, Self Testing
_PLL	Bodine 10w Lithium, Self Testing
_ILL	Iota 10w Integral Lithium, Self Testing

For Approximate Battery Lumen Output

- Multiply battery wattage X fixture LPW shown on Lumen Table
- 120 (LPW) x 10 (watts) = 1200 battery lumen output

Emergency

- Select emergency type if required, indicate total QTY. *Example 1FSG*
- Combine battery and emergency ordering codes if both options are selected

_FSG	Factory Select ALCR, Emergency Control Device, UNV
_GI	Iota ETS-DR, Emergency Transfer Switch, UNV
_GB	Bodine GTD, Generator Transfer Device, 120v or 277v
_E	Emergency circuit section
_N	Night Light circuit section
_L	Life Safety circuit section NO THROUGH WIRE

Battery OR Emergency Ordering Examples

• Single circuit, 10w Integral BatteryOrdering	Code: 1-1FSB
• Emergency only, 10w Integral BatteryOrdering	Code: E-1PLL

Finish

- Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes
- Selecting a fixture finish other than white may impact lumen output; consult factory for more information

W	White
S	Metallic Silver
BL	Textured Black
BR	Bronze
GR	Graphite
CC	Custom Color


Controls

- Pinnacle is able to accommodate different control solutions from different manufacturers. Consult Factory for more information.

Photometrics

High Efficiency Lens

Test #	KPL2015-219
Catalog #	NK-A-840-VHO-4
Lumens	4416
Watts	31.3
Efficacy	141 LPW



Candela Distribution

Vert Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	737	737	737	737	737
5	761	763	754	738	726
10	800	797	775	742	716
15	840	831	794	742	699
20	878	863	810	736	677
25	912	891	821	725	648
30	940	914	828	709	614
35	961	930	828	688	575
40	975	938	823	663	530
45	982	940	812	632	482
50	980	933	794	597	430
55	971	920	770	557	376
60	954	899	739	513	319
65	930	871	702	464	259
70	900	836	661	413	198
75	865	798	617	360	145
80	828	758	571	310	98
85	793	720	530	268	60
90	765	693	502	239	32

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	8841	8387	8255
55	8878	8289	7764
65	8915	8156	7024
75	8999	8034	5991
85	9324	8154	5458

For all available IES files, please visit our website at pinnacle-ltg.com. Photometry testing in accordance to IESNA-LM-79-08 at an NVLAP accredited testing laboratory. Testing conducted at 25°C ambient conditions

Applications & Certificates

Construction: 6063-T5 Extruded aluminum housing. Highly reflective die-formed white painted reflector.

Shielding: Diffuse snap-in acrylic lens with matte finish, removable for maintenance.

Mounting: Aircraft cable, wall and surface mount available. The aircraft cable that mounts on 4'-0" (1219.2mm) and 8'-0" (2438.4mm) centers. Aircraft Cable supplied with 5" (127mm) power and 2" (50.8mm) non-power canopies. Refer to installation instructions for appropriate ceiling detail. Canopies are painted white unless otherwise specified. Maximum fixture weight is 10 lbs for a standard 4' fixture.

LED: 25°C test environment. Lumen output/wattage has a margin of +/- 5%; 2' or 3' lengths may have a greater wattage deviation. Luminaire configurations tested in accordance with IES LM-79. Diodes tested in accordance with IES LM-80. Lifetime calculated using IES TM-21. Minimum lifetime greater than 60,000 hours. Lifetime Projection L70 = 254,800 hours and L90 = 80,200 hours. MacAdam 3-Step Ellipses. For all available IES files, please visit our website at pinnacle-ltg.com.

CRI, CCT & Output: Not all lumen packages available. Three lumen packages available. Standard, High (HO) and Very High (VHO). Custom outputs are available. Specify custom lumens or watts between standard offering listed on CRI, CCT & Output page. 80 CRI is available for 3000K, 3500K, and 4000K. 90 CRI is available for 2700K, 3000K, 3500K and 4000K. 90 CRI = R9≥50.

Voltage: Universal (U), 120 volt (1), 277 volt (2) and 347 volt (3) options available. Must specify PL4 or OL4 in Driver section when 347 volt (3) is selected. Some EDGE configurations will not accommodate all voltage options; consult with factory.

Driver: Standard INTEGRAL Driver Option is EL1. All other driver options will be in remote box. EL1 designed for use with 120v or 277v only. Electronic driver, Power factor is >0.9 with a THD <20%. Driver Lifetime: 50,000 hours at 25°C ambient operating conditions. Ambient operating range: -20°F/-30°C to 128°F/54°C. When ND is specified, a spec grade driver will be provided. For more driver options, see Pinnacle Resource Guide. Some configurations will not accommodate all driver options.

Circuiting: Select from single circuit (1), Multi circuit (M), Emergency circuit (E) or Night Light circuit (N). For emergency circuiting situations that require no through wire or circuit separation, Life Safety Circuit should be selected. This will provide a separate power feed and only the Life Safety Circuit in that section. Some EX configurations will not accommodate all circuiting options; consult with factory.

Battery & Emergency: Select battery or emergency options if required. If battery or emergency option is not required, enter 0. Battery duration is 90 minutes as standard. Test button is remote to fixture. For more Battery options, see Pinnacle Resource Guide.

Finish: Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes. Canopies painted white unless specified differently in the options section of the part number. Contact factory for additional custom color and finish options.

Controls: Mod options available, consult with factory.

Labels: UL and cUL 1598 listed. Standard and HO lumen packages are approved for dry/damp location unless otherwise noted.

Fixture Weight: Maximum fixture weight is 10 lbs for a standard 4' fixture.

Buy American Act Compliant

Warranty: NOOK offered with a 5-year limited warranty. Covers LED, driver and fixture.