sorrel forms
Installation Instructions

pinnacle architectural lighting



AC Cable Installation.....2-3
Remote Box Details.....4
Lens Details.....5


Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 | F: 303-322-5568

A brand of legrand®

DISCLAIMERS | All of Pinnacle's packaging is recyclable with the exception of the straps on the pallets. Please reach out to the factory if you need assistance in recycling any packaging components. This product must be installed in accordance with applicable installation and electrical codes by a professional familiar with the construction and operation of the product. Minimum 90° C supply conductor. All electrical connections must be performed by a certified electrician to applicable local and national electrical codes. Damaged components must never be used. Contact Pinnacle prior to making any fixture alterations. Contact Pinnacle with any installation questions or field issues.


1 Layout

Lay out mounting and Jbox locations. Power is at center mount of fixture.

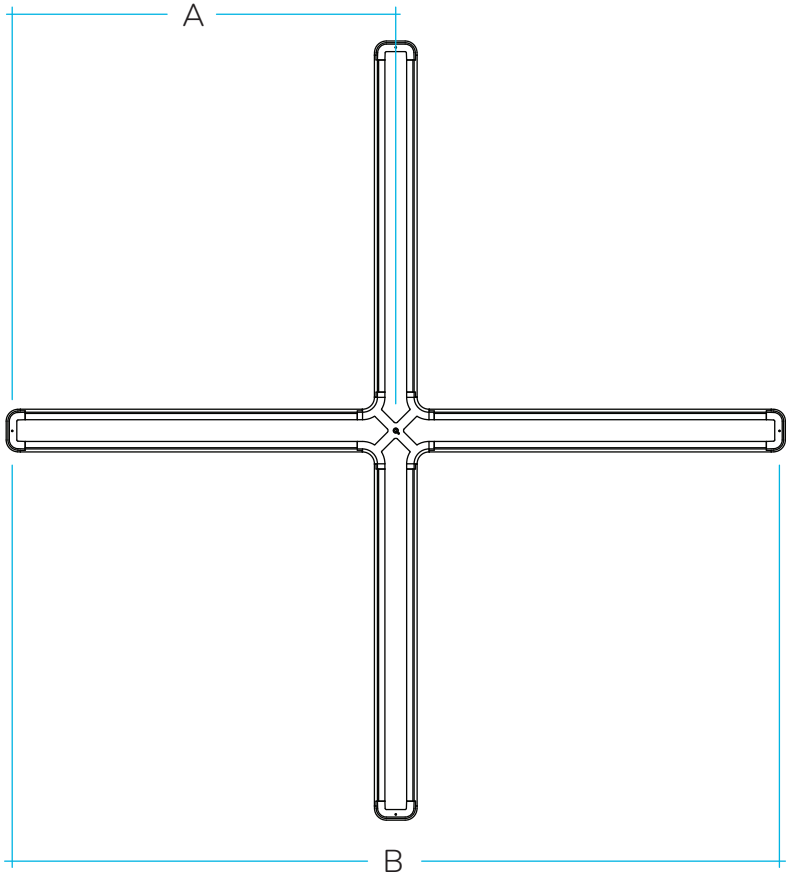

Mounting Locations


		X2	X3	Y2	Y3
S3UF	A	28-1/2”	20-1/2”	46-3/4”	67-1/2”
S3DF	B	56-7/8”	80-7/8”	40-1/2”	58-1/2”
	C	N/A	N/A	27”	39”
S3NF	A	28-1/4”	40-1/4”	46-1/2”	67-1/4”
	B	56-1/2”	80-1/2”	40-1/4”	58-1/4”
	C	N/A	N/A	26-3/4”	38-3/4”

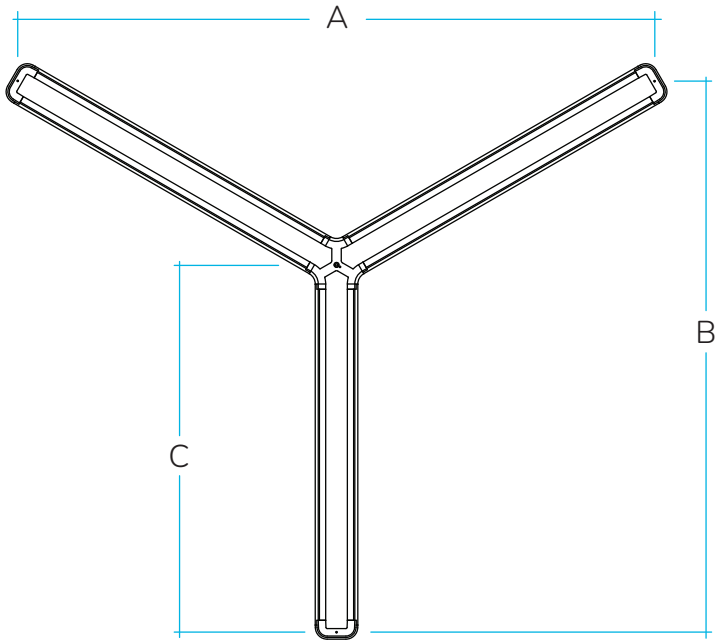

NOTE | For safety and proper leveling, all mounting suspension points at the ends and center of the light fixture must be used.


1 Central Power Mount

Install key hole bracket to J-Box (by others). Run conductive cable through key hole bracket, and make wiring connections inside of J-Box. Use cable collar for adjustment or height and leveling. To adjust unscrew 10-32 panhead screw in collar, adjust to desired height and tighten screws completely to collar. Slide canopy up to ceiling plane.

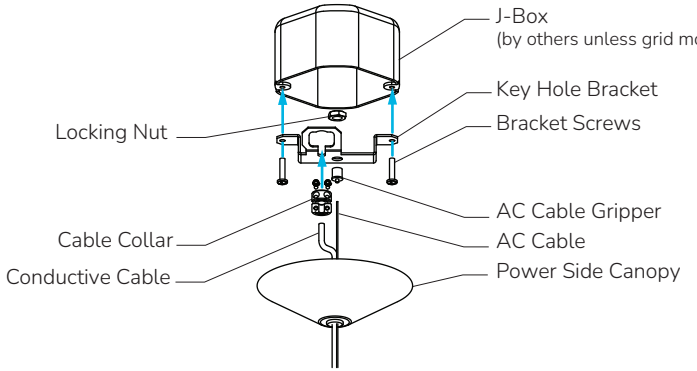


2 Non-Power Mount

Install 1/4-20 stud (by others) or IDS Clip (by others) for non-power mounts (1/2" below ceiling plane). Secure canopy to stud or IDS clip using coupler.

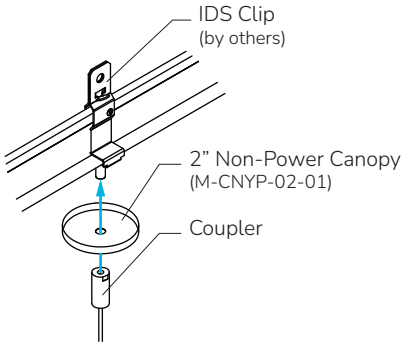

Grid Mounting

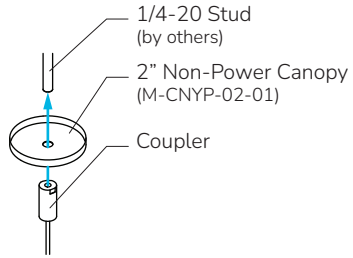


Inaccessible Mounting

sorrel forms
Remote Box Details

pinnacle architectural lighting


1 Slim Remote Box to Grid

Install slim remote driver box onto grid using pre-installed grid clips. To open remote box, remove two #6-32x1/4 screws on top of box. Use 1/2” trade knockout on high voltage side to connect to building power. Use 2’ long flexwhip to bring power to J-box.

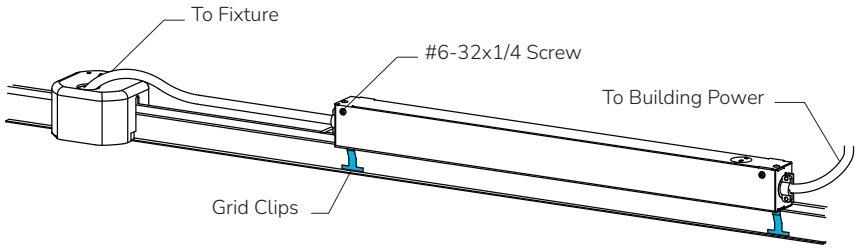


2 Slim Remote Box to Surface

Remove two grid brackets on back of remote driver box. Open remote driver box by removing two #6-32x1/4 screws on top of box. Install remote driver box to surface using 1/4” mounting hardware (by others). Connect to building power using 1/2” trade knockout on high voltage side. Then connect to J-box using 2’ long flex whip.

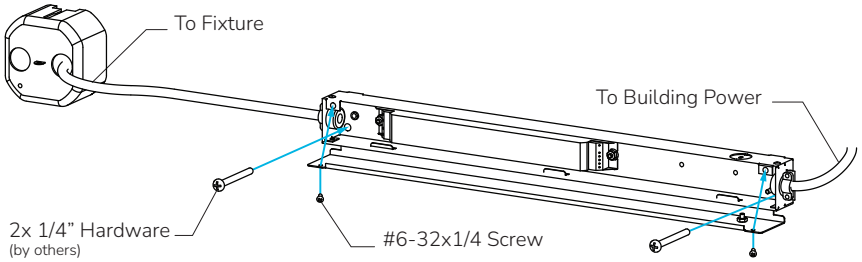


3 Standard Remote Box to Grid

Place remote driver box onto grid and bend grid tabs over securing with a #8 sheet metal screw. To open remote box, remove three #8-32x1/4 screws on top of box. Use 1/2” trade knock out on high voltage side to connect to building power. Use 2’ long flex whip to bring power to J-box.

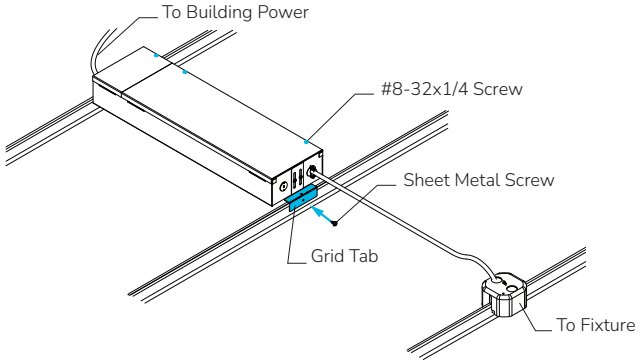


4 Standard Remote Box to Surface

Remove grid brackets on sides of remote driver box. Open remote driver box by removing three #8-32x1/4 screws on top of box. Install remote driver box to surface using 1/4” mounting hardware. Use 1/2” trade knock out on high voltage side to connect to building power. Use 2’ long flex whip to bring power to J-box.

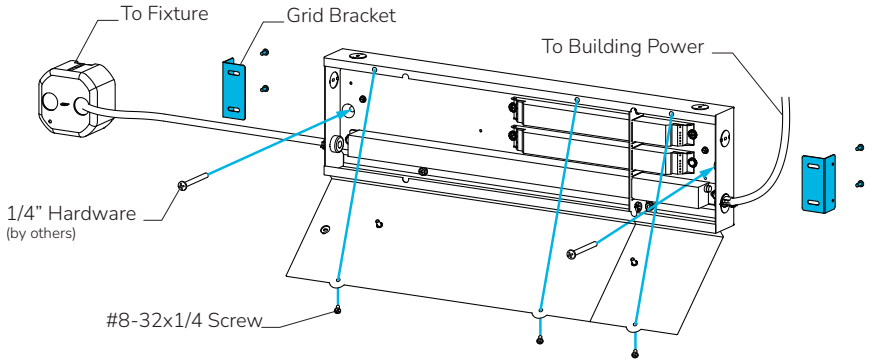

1 Lens Removal

Squeeze lens near end cap and pry away from fixture using a putty knife. Pull down gently while sliding putty knife along the length of lens.

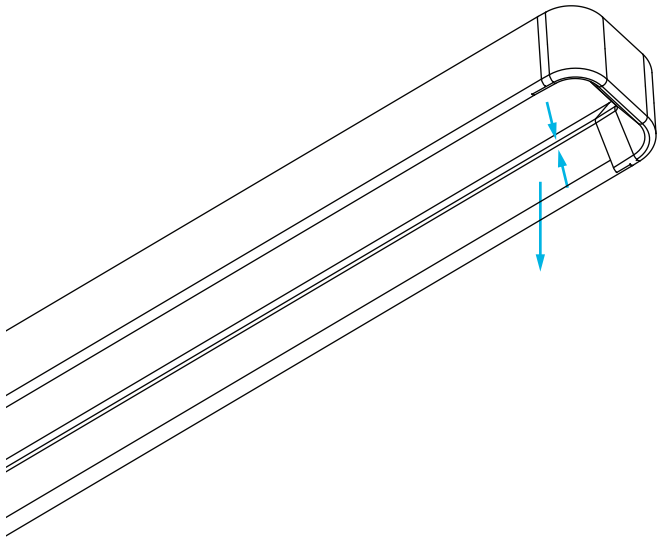

2 Lens Installation

Beginning at one end, squeeze lens legs together and slide into fixture. Slowly insert rest of lens down the length of the fixture, snapping into place.

