


# CONVERJ CJ11

## 1x1 Architectural Recessed




### Key Features

- Formed 20 gauge cold rolled steel housing. Highly reflective die-formed white painted reflector
- Wiring access available on top of housing
- LED offered with a 5-year limited warranty. Covers LED, driver and fixture
- UL and cUL Listed, STD and HO lumen packages are IC Rated
- Approved for dry/damp location unless otherwise noted
- Maximum fixture weight is 12 lbs - Surface Mount Box adds 10 lbs
- Room-Side Maintenance for LED system
- Buy American Act compliant



Example Part #: CJ11-A-830HO-G1-U-OL2-1-0-W



SHIELDING	CRI, CCT & OUTPUT	MOUNTING	VOLTAGE
<b>A</b> - Satine Lens <b>R</b> - Round Perf <b>L</b> - Linear Perf <i>Shielding pg. 2</i>	<b>27</b> - 2700K <b>30</b> - 3000K <b>35</b> - 3500K <b>40</b> - 4000K <b>CL</b> - Custom Lumens <b>CW</b> - Custom Watts <i>Lumen Output pg. 2</i> <i>Example: 830HO is 8 = 80 CRI; 30 = 3000K;</i> <i>LO = Low Output, HO = High Output</i>	<b>G1</b> - 15/16" Grid <b>G9</b> - 9/16" Grid <b>GS</b> - Screw Slot Grid <b>FL</b> - Flanged <b>S</b> - Surface Mount <i>Mounting pg. 3</i>	<b>U</b> - Universal (120 thru 277V) <b>1</b> - 120V <b>2</b> - 277V <b>3</b> - 347V <i>Voltage pg. 3</i>
DRIVER	CIRCUITING	BATTERY & EMERGENCY	FINISH
<b>PL2</b> - Advance Xitanium (1%, 0-10v) <b>OL4</b> - Osram 347V (1%, 0-10v) <b>LH1</b> - Lutron Hi-Lume (1%, EcoSystem) <b>OL2</b> - Osram (1%, 0-10v) <b>FSD</b> - Factory Select Driver (1%, 0-10v) <i>Driver pg. 3</i>	<b>1</b> - Single Circuit <b>E</b> - Emergency (entire fixture) <b>N</b> - Night Light (entire fixture) <i>Circuiting pg. 4</i>	<b>0</b> - None <b>1PRL</b> - Bodine 7W Remote <b>FSG</b> - Factory Select ALCR <b>GI</b> - Iota ETS DR <b>GB</b> - Bodine GTD <i>Battery and Emergency pg. 4</i>	<b>W</b> - White <i>Finish pg. 4</i>
FIXTURE OPTIONS	CONTROLS		
<b>TW</b> - Through-Wiring <b>CP</b> - Chicago Paint <b>AM</b> - Antimicrobial Plenum <b>AR</b> - Air Return <b>DSP</b> - Customer Supplied Battery/Driver/Sensor <b>FW6</b> - 6' Flex Whip <i>Fixture Options pg. 5</i>	<i>Pinnacle is able to accommodate different control solutions from different manufacturers. Consult Factory for more information.</i>		

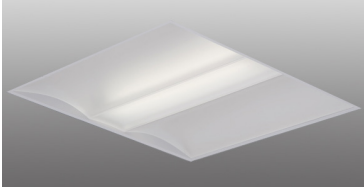
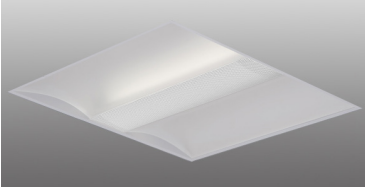
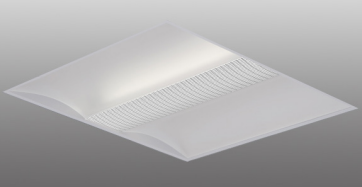
Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



## Shielding

- Unique twin-arched wings and articulated center spine
- Utilizes a proprietary layered lens creating a fully luminous housing with optimal glare control
- Highly reflective white reflectors maintain uniform lens brightness
- Wiring access available on both side and top of housing

### Ordering Code

A	R	L
Satine Lens	Round Perf	Linear Perf
		

## Output

- Specify either 80 or 90 CRI
- Longer lead-time may apply for 90 CRI. Consult factory
- 80 CRI = R9≥19 and 90 CRI = R9≥61

### Custom Output- Lumens OR Wattage

<b>CL</b> _____	Specify CRI, CCT and desired lumens (i.e. CL8351200)	Specify lumens between standard offering listed below. Lumens are specified per color temp
<b>CW</b> _____	Specify CRI, CCT and desired wattage (i.e. CW94015)	Specify watts between standard offering listed below

### 80 CRI

	Color	Output	Watts	Shielding <b>A</b> Satine Lens	
				Lumens	LPW
<b>830LO</b>	3000K	Standard	12.6	840	66.7
<b>830HO</b>	3000K	High	24.0	1507	62.8
<b>835LO</b>	3500K	Standard	12.6	877	69.6
<b>835HO</b>	3500K	High	24.0	1575	65.6
<b>840LO</b>	4000K	Standard	12.6	900	71.4
<b>840HO</b>	4000K	High	24.0	1616	67.3

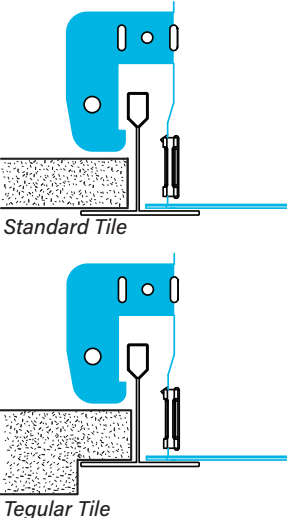
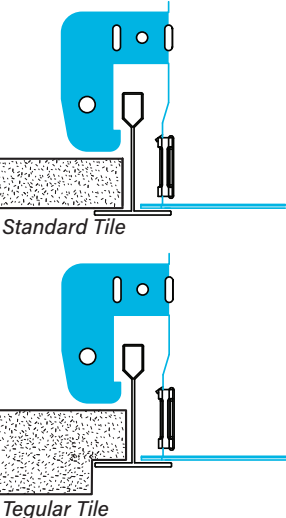
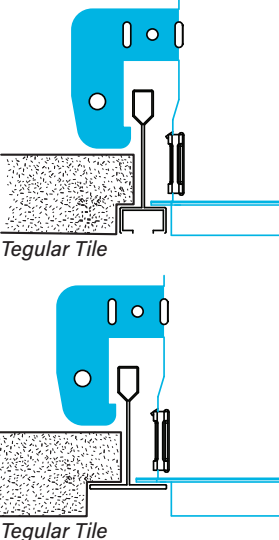
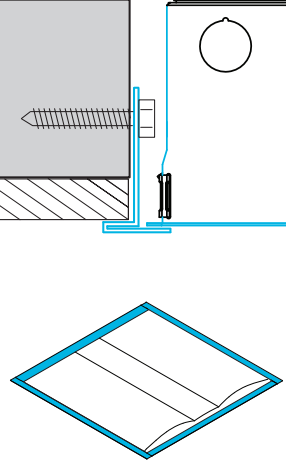
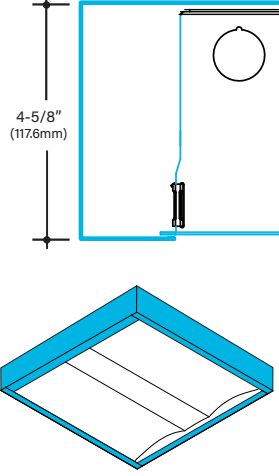
### 90 CRI

<b>927LO</b>	2700K	Standard	12.6	690	54.8
<b>927HO</b>	2700K	High	24.0	1238	51.6
<b>930LO</b>	3000K	Standard	12.6	774	61.4
<b>930HO</b>	3000K	High	24.0	1388	57.8
<b>935LO</b>	3500K	Standard	12.6	789	62.6
<b>935HO</b>	3500K	High	24.0	1416	59.0
<b>940LO</b>	4000K	Standard	12.6	803	63.7
<b>940HO</b>	4000K	High	24.0	1442	60.1



## Mounting

- Converj 1x1 Recessed does not fit into standard 1' x 1' grid spacing, see installs for grid mounting details.
- Designed to install into acoustical grid and inaccessible ceilings
- Grid retention clips integral to housing and require mechanical attachment
- Tie off fixture to structure with retention wires
- Maximum fixture weight is 12 lbs - Surface Mount Box adds 10 lbs
- Refer to installation instructions during installation at the job site
- Approved for dry/damp location unless otherwise noted

G1	G9	GS	FL	S
<p><b>1" Grid Mount</b> Works with 15/16" grid ceiling types. See profile for fixture types. See profile for fixture position in relation to ceiling grid and tile.</p>  <p>Standard Tile</p> <p>Tegular Tile</p>	<p><b>9/16" Grid Mount</b> Works with 9/16" grid ceiling type. For tegular tile installations, fixture position will not be flush to the bottom of the tile. See tegular tile profile image below.</p>  <p>Standard Tile</p> <p>Tegular Tile</p>	<p><b>Screw Slot Mounting</b> Works with screw slot, bolt slot and 9/16" grid ceiling types. For 9/16" installations with tegular tile, fixture position will be flush to the bottom of the tile. Consult factory for detailed installation instructions.</p>  <p>Tegular Tile</p> <p>Tegular Tile</p>	<p><b>Flange Kit</b> A separate flange kit is supplied for installations into inaccessible or drywall applications. Flange kit ships from factory uninstalled separately from fixture. Consult factory for detailed installation instructions.</p> 	<p><b>Surface Mount</b> Utilize for hard lid ceiling applications. The 20 gauge steel frame easily secures to ceiling. Surface Mount Box adds 10 lbs.</p>  <p>4-5/8" (117.6mm)</p>

## Voltage

- Some CONVERJ configurations will not accommodate all voltage options; consult with factory

<b>U</b>	Universal
<b>1</b>	120 volt
<b>2</b>	277 volt
<b>3</b>	347 volt



## Driver

- Standard Driver Option = PL2
- Driver Lifetime: 50,000 hours at 25°C ambient operating conditions
- For more Driver options, see Pinnacle Resource Guide
- Some CONVERJ configurations will not accommodate all driver options; consult with factory

0-10V Drivers	
<b>FSD</b>	Factory Select Driver 1%, 0-10v
<b>OL2</b>	Osram Optotronic, 1%, 0-10v
<b>OL4</b>	Osram Optotronic 347v, 1% 0-10v (requires 347v)
<b>EE1</b>	eldoLED ECOdrive 1%, 0-10v Logarithmic
<b>EE2</b>	eldoLED ECOdrive 1%, 0-10v Linear
<b>ES1</b>	eldoLED SOLOdrive 0-10v, 0% Logarithmic
<b>ES2</b>	eldoLED SOLOdrive 0-10v, 0% Linear
<b>OL5</b>	Osram Optotronic 1%, 0-10v, AUX
DALI Drivers	
<b>EE3</b>	eldoLED SOLOdrive .1%, DALI (logarithmic)
<b>EE4</b>	eldoLED SOLOdrive .1%, DALI (linear)
Lutron Drivers	
<b>LH1</b>	Lutron Hi-lume Soft-on, Fade-to-black 1%, EcoSystem, LDE1
Alternate Drivers	
<b>EH1</b>	ELV 120v only, 0-10v universal

## Circuiting

- Select fixture circuiting from options below
- Some CONVERJ configurations will not accommodate all circuiting options; consult with factory

<b>1</b>	Single Circuit
<b>E</b>	Emergency Circuit only
<b>N</b>	Night Light Circuit only

## Battery & Emergency

- Select battery or emergency options if required
- Battery duration is 90 minutes
- Test button is remote
- For more Battery options, see Pinnacle Resource Guide

<b>0</b>	No Battery
<b>1IRC</b>	Iota 10w Remote
<b>1PRS</b>	Bodine 7w Remote, Self Testing
<b>1PRD</b>	Bodine 10w Remote, Dual Flex
<b>FSG</b>	Factory Select Automatic Load Control Relay (ALCR)
<b>GI</b>	Emergency Transfer Switch (ETS) DR Emergency Control Device
<b>GB</b>	Bodine GTD, Generator Transfer Device

**For Approximate Battery Lumen Output**

- Multiply battery wattage X fixture LPW shown on Lumen Table
- 7 (watts) x 65.6 (LPW) = 459 battery lumen output

**Battery & Emergency Ordering Examples**

- Single circuit, 7w remote battery      Ordering Code: 1-1PRL
- Emergency circuit only, 7w remote battery      Ordering Code: E-1PRL

## Finish

- Powder-coat white painted finish on exposed trim

<b>W</b>	White
----------	-------



## Fixture Options

- Additional options to enhance the fixture and finish of the product

<b>TW</b>	Through-Wiring
<b>CP</b>	Chicago Plenum
<b>AM</b>	Antimicrobial Paint
<b>AR</b>	Air Return
<b>DSP</b>	Customer Supplied Battery/Driver/Sensor
<b>FW6</b>	Flex Whip 6'


## Controls

- Pinnacle is able to accommodate different control solutions from different manufacturers. Consult Factory for more information.

## Photometrics

### Satine Lens

Test #	ITL84373
Catalog #	CJ11A-840
Lumens	900 lm
Watts	12.6 W
Efficacy	71 LPW



### Candela Distribution

Vert Angle	Horizontal Angle				
	0	22.5	45	67.5	90
0	334	334	334	334	334
5	332	332	332	332	331
10	328	327	326	325	326
15	318	317	317	316	316
20	306	304	304	304	303
25	291	289	289	289	289
30	271	270	272	272	272
35	250	249	251	253	253
40	227	227	229	232	233
45	203	203	206	210	211
50	178	178	182	187	188
55	152	153	158	163	165
60	126	128	133	139	141
65	101	103	109	114	117
70	76	79	85	90	93
75	50	55	61	65	68
80	27	32	37	41	43
85	9	12	15	16	17
90	0	0	0	0	0

### Luminance Data (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	4418	4483	4591
55	4085	4245	4432
65	3696	3986	4275
75	2958	3609	4023
85	1581	2635	2987

For all available IES files, please visit our website at [pinnacle-ltg.com](http://pinnacle-ltg.com). Photometry testing in accordance to IESNA-LM-79-08 at an NVLAP accredited testing laboratory. Testing conducted at 25°C ambient conditions

Specifications and dimensions subject to change without notice. Specification sheets that appear on [pinnacle-ltg.com](http://pinnacle-ltg.com) are the most recent version and supersede all other previously printed or electronic versions.

Designed and Fabricated in Denver, CO • USA | [pinnacle-ltg.com](http://pinnacle-ltg.com) | O: 303-322-5570 F: 303-322-5568



## Approvals & Certifications

**Construction:** Formed 20 gauge cold rolled steel housing. Highly reflective die-formed reflectors maintain uniform lens brightness. Wiring access on both sides and top of housing. Housing designed to maintain optimal temperature of LED diodes and driver. Captive one-piece door frame swings open for room-side maintenance of lens, driver and LED boards.

**Shielding:** Single piece co-extruded unique twin-arched wings and articulated center spine. Utilizes a proprietary layered lens creating a fully luminous housing with optimal glare control. Available with standard satine lens.

**Mounting:** Designed to install into acoustical grid and inaccessible ceilings. Specify G1, G9 or GS for acoustical grid ceiling. Specify FL for inaccessible ceilings. Grid retention clips integral to housing and require mechanical attachment. Tie off fixture to structure with retention wires. Maximum fixture weight is 12 lbs - Surface Mount Box adds 10 lbs

**LED:** 25°C test environment. Lumen output/wattage has a margin of +/- 5%. All luminaire configurations tested in accordance with IES LM-79. Diodes tested in accordance with IES LM-80. Lifetime calculated using IES TM-21. Minimum lifetime greater than 60,000 hours. L70 = 105,000 hours and L90 = 30,000 hours. MacAdam 3-Step Ellipses. For all available IES files, please visit our website at [pinnacle-ltg.com](http://pinnacle-ltg.com).

**CRI, CCT & Output:** Two lumen packages available. Standard and High (HO). Custom outputs are available. Specify custom lumens or watts between standard offering listed on CRI, CCT & Output page. 80 CRI is available for 3000K, 3500K, and 4000K. 90 CRI is available for 2700K, 3000K, 3500K, and 4000K. 80 CRI = R9≥19 and 90 CRI = R9≥61.

**Voltage:** Universal (U), 120 volt (1), 277 volt (2) and 347 volt (3) options available. Must specify OL4 in Driver section when 347 volt (3) is selected. Some CONVERJ configurations will not accommodate all voltage options; consult with factory.

**Driver:** Standard Driver Option is Osram 0-10V, 10% = PL2. Electronic driver, Power factor is >0.9 with a THD <20%. Driver Lifetime: 50,000 hours at 25°C ambient operating conditions. Ambient operating range: -20°F/-30°C to 94°F/34°C. For more driver options, see Pinnacle Resource Guide. Some CONVERJ configurations will not accommodate all driver options.

**Circuiting:** Select from single circuit (1), Emergency circuit (E) or Night Light circuit (N). Some CONVERJ configurations will not accommodate all circuiting options, consult with factory.

**Battery & Emergency:** Select battery or emergency options if required. If battery or emergency option is not required, enter 0. Battery duration is 90 minutes as standard. Test button is integral to fixture. For more Battery options, see Pinnacle Resource Guide.

**Finish:** Powder-coat white painted finish on exposed trim.

**Controls:** Consult factory.

**Labels:** UL and cUL Listed. LO and HO lumen packages are IC Rated, approved for dry/damp location unless otherwise noted.

**Fixture Weight:** 12 lbs maximum - Surface Mount Box adds 10 lbs.

### Buy American Act Compliant

**Warranty:** CONVERJ LED offered with a 5-year limited warranty. Covers LED, driver and fixture.