




FINA F36D

36" Direct Suspended Architectural Round with Acoustic Solutions

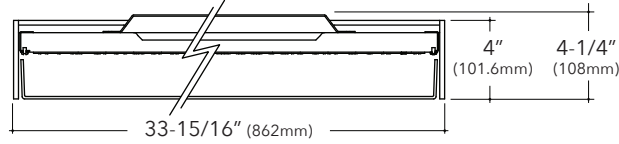


Key Features

- Aluminum housing is rolled and welded for seamless finish with 1/4" trim
- Aluminum top cover conceals all electrical components. Highly reflective die-formed white painted steel reflector
- FINA offered with a 5-year limited warranty. Covers LED, driver and fixture
- ETL Listed conforming to UL1598 in US and CSA 250 in Canada
- Maximum fixture weight is 47 lbs
- Room-side maintenance for LED system
- Buy American Act compliant
- Apparent Noise Reduction Coefficient (NRC) is up to 1.85



Example Part #: F36D-A-830HO-AC348JB-U-PL2-1-0-W



| SHIELDING ¹ | SOURCE ² | MOUNTING ³ | VOLTAGE |
|---|--|---|--|
| A - Flush Satine Lens AR - Regress Satine Lens AL - Drop Satine Lens ASF - Acoustic Solution Flush <i>(use A__ to specify color)</i> ASR - Acoustic Solution Regress <i>(use A__ to specify color)</i> <i>Shielding pg. 2</i> | 27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K CL - Custom Lumens CW - Custom Watts NA - Not Applicable <i>(for specifying SA fixtures)</i> <i>Source pg. 3</i> | AC3 - 3 AC to JB or ST AH4 - 4 AC w/hub to JB or ST PP - Pendant Pipe to JB or ST PS - Pendant Swivel to JB or ST S - Surface Mount WA - Wall Mount <i>Mounting pg. 4</i> | U - Universal <i>(120 thru 277V)</i> 1 - 120V 2 - 277V 3 - 347V NA - Not Applicable <i>(for specifying SA fixtures)</i> <i>Voltage pg. 4</i> |

| DRIVER | CIRCUITING | BATTERY & EMERGENCY | FINISH |
|--|--|---|---|
| FSD - Factory Select Driver <i>(1%, 0-10v)</i> PL2 - Advance Xitanium <i>(1%, 0-10v)</i> EE1 - eldoLED ECOdrive <i>(1%, 0-10v)</i> ES1 - eldoLED SOLOdrive <i>(0.1%, 0-10v)</i> LH1 - Lutron Hi-lume <i>(1%, EcoSystem)</i> OL2 - Osram <i>(1%, 0-10v)</i> OL4 - Osram 347V <i>(1%, 0-10v)</i> NA - Not Applicable <i>(for specifying SA fixtures)</i> <i>Driver pg. 4</i> | 1 - Single Circuit E - Emergency <i>(entire fixture)</i> N - Night Light <i>(entire fixture)</i> NA - Not Applicable <i>(for specifying SA fixtures)</i> <i>Circuiting pg. 5</i> | 0 - None 1P - Bodine 10W 1I - Iota 10W 1IC - Iota 10W <i>(CEC Listed)</i> 1G - Bodine GTD FSG - Factory Select ALCR GI - Iota ETS DR GB - Bodine GTD NA - Not Applicable <i>(for specifying SA fixtures)</i> <i>Battery and Emergency pg. 5</i> | W - White S - Metallic Silver BL - Textured Black BR - Bronze GR - Graphite CC - Custom Color <i>Finish pg. 5</i> |

| FIXTURE OPTIONS | CONTROLS ⁴ |
|--|---|
| AM - Antimicrobial Paint GMF - Slow Blow Fusing DSP - Customer Supplied Battery/Driver/Sensor NA - Not Applicable <i>(for specifying SA fixtures)</i> <i>Fixture Options pg. 5</i> | DLMFC - Wattstopper DLM <i>(wired)</i> ENLI - Enlighted IOT <i>(remote)</i> ENLC - Enlighted Connected Lighting <i>(remote)</i> NA - Not Applicable <i>(for specifying SA fixtures)</i> <i>Controls pg. 5</i> |

¹When specifying Sound Absorption (no lit components), use NA for the following sections of the part number: SOURCE, VOLTAGE, DRIVER, CIRCUITING, BATTERY & EMERGENCY, or CONTROLS. ²When specifying SOURCE the first __ is for specifying either **8** - 80CRI, **9** - 90CRI. The ending __ are for specifying output, example **HO** - High Output. ³Example: AC348JB. AC3 = 3 Aircraft Cables, 48 = 48" long cables, JB = connects to junction box. Standard AC cable lengths are 48" and 120", field adjustable. Standard pendant lengths are 12", 18", or 24". ⁴Controls can only be used with Single Circuit (1) or Emergency Circuit (E), cannot be used with any battery options. See Controls chart on page 5 for driver options and more information.




Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



Shielding

- White virgin acrylic lens with matte finish, removable for LED access
- Lens available in 3 positions

Ordering Code

| A or ASF | AL | AR or ASR |
|---|---|--|
| Flush Satine Lens or Acoustic Solution | Drop Satine Lens | Regress Satine Lens or Acoustic Solution |
|  |  |  |

Acoustic Solutions

- 12mm PET Polyester Fiber acoustic panel
- Recyclable and contains up-to 90% post-consumer content
- Colors below are for representation purposes, color may vary from photograph, contact factory for sample
- Specify the color of the Acoustic panel with the numeric code below in the Acoustic Finish portion of the part number. For example, specify **A08** for Nickel

| | | | | | |
|---|---|---|--|---|---|
| A01 - Charcoal | A02 - Black | A03 - Azure | A04 - Ruby | A05 - Commander | A06 - Coffee Bean |
|  |  |  |  |  |  |
| A07 - Almond | A08 - Nickel | A09 - Stone | A10 - Slate | A11 - Pear | A12 - Teal |
|  |  |  |  |  |  |
| A13 - Warm White | A14 - Nighttime Blue | A15 - Tiger | A16 - Cool Grey | A17 - Grey Granite | A18 - Dune |
|  |  |  |  |  |  |
| A19 - Bone | A20 - Bumblebee | A21 - Gingerbread | A22 - Raven | A23 - Oregano | A24 - Mushroom |
|  |  |  |  |  |  |
| PCC - Custom Color | | | | | |
| Please note there is a minimum order quantity for custom matching. Consult factory for order quantity, price and lead-time. | | | | | |



Source: White LED

- Specify either 80 or 90 CRI
- Longer lead-time may apply for 90 CRI. Consult factory
- 80 CRI = R9≥19 and 90 CRI = R9≥61

Sound Absorption

NA Not applicable (for Sound Absorption fixtures)

Custom Output- Lumens OR Wattage

CL _____ Specify CRI, CCT and desired lumens (i.e. CL8352000) *Specify lumens between standard offering listed below. Lumens are specified per color temp*

CW _____ Specify CRI, CCT and desired wattage (i.e. CW94020) *Specify watts between standard offering listed below*

80 CRI

| | Color | Shielding | | |
|--------------|-------|------------------|-------|-----|
| | | A, AL, AR | | |
| | | Satine Lens | | |
| | | Lumens | Watts | LPW |
| 830LO | 3000K | 4624 | 43.7 | 106 |
| 830MO | 3000K | 7974 | 74.1 | 108 |
| 830HO | 3000K | 11182 | 108.1 | 103 |
| 835LO | 3500K | 4849 | 44.2 | 110 |
| 835MO | 3500K | 8512 | 74.9 | 114 |
| 835HO | 3500K | 11788 | 108.9 | 108 |
| 840LO | 4000K | 4994 | 44.2 | 113 |
| 840MO | 4000K | 8528 | 74.7 | 114 |
| 840HO | 4000K | 11957 | 108.8 | 110 |

90 CRI

| | | | | |
|--------------|-------|------|-------|----|
| 927LO | 2700K | 3923 | 45.5 | 86 |
| 927MO | 2700K | 6632 | 78.2 | 85 |
| 927HO | 2700K | 9140 | 115.3 | 79 |
| 930LO | 3000K | 4019 | 45.1 | 89 |
| 930MO | 3000K | 6777 | 77.3 | 88 |
| 930HO | 3000K | 9373 | 113.8 | 82 |
| 935LO | 3500K | 4019 | 45.1 | 89 |
| 935MO | 3500K | 6777 | 77.3 | 88 |
| 935HO | 3500K | 9373 | 113.8 | 82 |
| 940LO | 4000K | 4211 | 45.3 | 93 |
| 940MO | 4000K | 7104 | 77.7 | 91 |
| 940HO | 4000K | 9828 | 114.6 | 86 |


Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



Mounting

- Aircraft cables and pendants mount directly to a standard junction box or structure
- Canopies and pendants match fixture finish, power cords are white, grey, or black depending on fixture finish. See Finish section for additional details.
- Must specify overall pendant length of 12", 18" or 24"
- Must specify cable length, either 48" or 120" standard, field adjustable
- Tie off fixture to structure with retention wires
- Maximum fixture weight is 47 lbs

| | | | |
|---|--|--|-----------------------------------|
| AC3__JB 3 AC cables to fixture to J-Box | AH4__JB 4 AC cables with hub to fixture to J-Box | PP__JB Pendant Pipe to J-Box | S Surface Mount Ceiling |
| AC3__ST 3 AC cables to fixture to Structure | AH4__ST 4 AC cables with hub to fixture to Structure | PS__JB Pendant Swivel to J-Box | WA Surface Mount Wall |
| | | PP__ST Pendant Pipe to Structure | |
| | | PS__ST Pendant Swivel to Structure | |

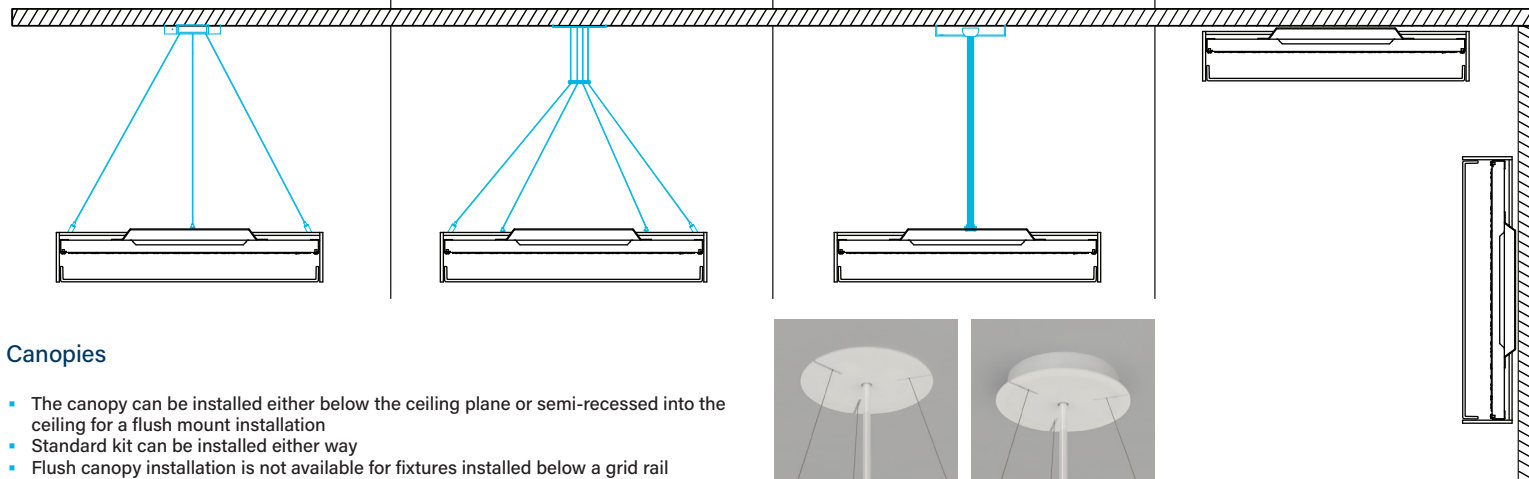

Canopies

- The canopy can be installed either below the ceiling plane or semi-recessed into the ceiling for a flush mount installation
- Standard kit can be installed either way
- Flush canopy installation is not available for fixtures installed below a grid rail

Voltage

- Some FINA configurations will not accommodate all voltage options; consult with factory

| | |
|-----------|---------------------------------------|
| U | Universal |
| 1 | 120 volt |
| 2 | 277 volt |
| 3 | 347 volt |
| NA | Not Applicable (for Sound Absorption) |

Driver

- Standard Driver Option = FSD
- Driver Lifetime: 50,000 hours at 25°C ambient operating conditions
- For more Driver options, see Pinnacle Resource Guide on download pages at pinnacle-ltg.com
- Some FINA configurations will not accommodate all driver options; consult with factory

| 0-10V Drivers | |
|-------------------|---|
| FSD | Factory Select Driver 1%, 0-10v |
| PL2 | Advance Xitanium 1%, 0-10v |
| PL4 | Advance Xitanium 347v 1%, 0-10v, requires 347v |
| OL2 | Osram Optotronic, 1%, 0-10v |
| OL4 | Osram Optotronic 347v, 1% 0-10v, requires 347v option |
| EE1 | eldoLED ECOdrive 1%, 0-10v Logarithmic |
| EE2 | eldoLED ECOdrive 1%, 0-10v Linear |
| ES1 | eldoLED SOLOdrive 0-10v, 0.1% Logarithmic |
| ES2 | eldoLED SOLOdrive 0-10v, 0% Linear |
| DALI Drivers | |
| EE3 | eldoLED ECOdrive .1%, DALI (logarithmic) |
| ES3 | eldoLED SOLOdrive .1%, DALI (logarithmic) |
| OD1 | Osram Optotronic 1%, DEXAL |
| OD2 | Osram Optotronic 1%, DALI 2 Channel |
| Lutron Drivers | |
| LH1 | Lutron Hi-lume Soft-on, Fade-to-black 1%, EcoSystem, LDE1 |
| LH4 | Lutron Hi-Lume 1%, 2-wire, Lutron-LTEA2W, 120v only |
| Alternate Drivers | |
| PS1 | Signify Advance Xitanium Step Dimming 50%/100% |

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568

F36D_SUSPENDED_SPEC_OCT2022



Circuiting

- Select fixture circuiting from options below
- Some FINA configurations will not accommodate all circuiting options; consult with factory

| | |
|-----------|---------------------------------------|
| 1 | Single Circuit |
| E | Emergency Circuit only |
| N | Night Light Circuit only |
| NA | Not Applicable (for Sound Absorption) |

Battery & Emergency

- Select battery or emergency options if required
- Battery duration is 90 minutes
- Test button is integral to fixture
- For more Battery options, see Pinnacle Resource Guide on download pages at pinnacle-ltg.com

| | |
|-------------|---|
| 0 | No Battery |
| 1IC | 10w Integral |
| 1ILL | 10w Integral Lithium, Self Testing |
| 1IRH | 20w Remote |
| 1P | Bodine 10w Integral |
| 1PLL | Bodine 10w Integral Lithium, Self Testing |
| 1PRH | Bodine 20w Remote |
| FSG | Factory Select Automatic Load Control Relay (ALCR) |
| GI | Emergency Transfer Switch (ETS) DR Emergency Control Device |
| GB | Bodine GTD, Generator Transfer Device |

For Approximate Battery Lumen Output

- Multiply battery wattage X fixture LPW shown on Lumen Table
- 10 (watts) x 92.3 (LPW) = 923 battery lumen output

Battery & Emergency Ordering Examples

- Single circuit, 10w integral battery Ordering Code: 1-1PB
- Emergency circuit only, 10w integral battery Ordering Code: E-1PB

Finish

- Powder-coat white painted finish on exposed trim

| | |
|-----------|--|
| W | White (white cord/white canopy) |
| S | Metallic Silver (grey cord/silver canopy) |
| BL | Textured Black (black cord/black canopy) |
| BR | Bronze (white cord/bronze canopy) |
| GR | Graphite (white cord/graphite canopy) |
| CC | Custom Color (white cord/color match canopy) |

Fixture Options

- Additional options to enhance the fixture and finish of the product

| | |
|------------|---|
| AM | Antimicrobial Paint |
| GMF | Internal Slow Blow Fuse |
| DSP | Customer Supplied Battery/Driver/Sensor |
| NA | Not Applicable (for Sound Absorption) |

Controls

- Pinnacle Lighting offers easy to specify network control solutions that connect to an intelligent centralized system to maximize lighting energy efficiencies or integral sensors for individual fixture control
- Pinnacle Lighting fixtures ship technology ready; commissioning by others
- Controls can only be used with Single Circuit (1) or Emergency Circuit (E)
- Contact factory for any non-standard configurations for layout, placement, or EM options
- One sensor per housing typical, contact factory for more information


| | Solution | Components | Network/Sensor | Connection | RQD Drivers | Limitation |
|--------------|---------------------------------------|------------|-----------------------------------|-----------------------|-------------|-----------------------------|
| DLMFC | Legrand Wattstopper DLM | LMFC-011 | Digital Lighting Management (DLM) | Wired, two RJ45 ports | OL2, OL4 | None |
| ENLI | Enlighted IOT | CU-4E | Enlighted, Remote | Enlighted Cable | Any 0-10v | Not available with 347 volt |
| ENLC | Enlighted Connected Lighting | CU-4E | Enlighted, Remote | Enlighted Cable | Any 0-10v | Not available with 347 volt |
| NA | Not Applicable (for Sound Absorption) | | | | | |



Photometrics

Satine Lens

Test # ITL92435
Catalog # F36D-A-840HO
Lumens 11954 lm
Watts 106 W
Efficacy 113 LPW



Candela Distribution

| Vert Angle | Horizontal Angle |
|------------|------------------|
| 0 | 0 |
| 0 | 4196 |
| 5 | 4184 |
| 10 | 4127 |
| 15 | 4031 |
| 20 | 3898 |
| 25 | 3731 |
| 30 | 3536 |
| 35 | 3310 |
| 40 | 3058 |
| 45 | 2785 |
| 50 | 2487 |
| 55 | 2173 |
| 60 | 1840 |
| 65 | 1491 |
| 70 | 1136 |
| 75 | 785 |
| 80 | 460 |
| 85 | 196 |
| 90 | 12 |

Luminance Data (cd/sq.m)

| Angle In Degrees | Average 0-Deg | Average 45-Deg | Average 90-Deg |
|------------------|---------------|----------------|----------------|
| 45 | 6929 | 6929 | 6929 |
| 55 | 6658 | 6658 | 6658 |
| 65 | 6190 | 6190 | 6190 |
| 75 | 5302 | 5302 | 5302 |
| 85 | 3861 | 3861 | 3861 |

For all available IES files, please visit our website at pinnacle-ltg.com. Photometry testing in accordance to IESNA-LM-79-08 at an NVLAP accredited testing laboratory. Testing conducted at 25°C ambient conditions

Approvals & Certifications

Construction: Extruded aluminum housing is rolled and welded for seamless finish with minimal trim detail. Aluminum top cover conceals all electrical components. Highly reflective die-formed white painted steel reflector. Wiring access on top of housing.

Shielding: Single piece diffuse lens creating a fully luminous housing. Available with standard satine lens.

Acoustic Solutions: Acoustic Solutions panels may be specified in place of lit fixture components to aid in Acoustic Control within a space. Acoustic Solutions material is a 9mm PET Polyester Fiber acoustic panel, containing up to 90% post-consumer content, made by others. Acoustic testing was completed by Riverbank Acoustic. For specific reports, contact Pinnacle directly.

Mounting: Aircraft cable, Pendant, Surface and Wall mount available. Aircraft Cable and pendant supplied with 5" (127mm) canopies. Refer to installation instructions for appropriate ceiling detail. Maximum fixture weight is 47 lbs.

LED: 25°C test environment. Lumen output/wattage has a margin of +/- 5%. All luminaire configurations tested in accordance with IES LM-79. Diodes tested in accordance with IES LM-80. Lifetime calculated using IES TM-21. Minimum lifetime greater than 60,000 hours. L70 = 146,500 hours and L90 = 45,000 hours. MacAdam 3-Step Ellipses. Not all products are Lighting Facts listed. For all available IES files, please visit our website at pinnacle-ltg.com.

CRI, CCT & Output: Three lumen packages available. Low (LO), Mid (MO) and High (HO). Custom outputs are available. Specify custom lumens or watts between standard offering listed on CRI, CCT & Output page. 80 CRI is available for 3000K, 3500K, and 4000K. 90 CRI is available for 2700K, 3000K, 3500K, and 4000K. 80 CRI = R9≥19 and 90 CRI = R9≥61.

Voltage: Universal (U), 120 volt (1), 277 volt (2), 347 volt (3) options available. Must specify OL4 in Driver section when 347 volt (3) is selected. Some FINA configurations will not accommodate all voltage options; consult with factory.

Driver: Standard Driver Option is Advance 0-10V, 1% = PL2. Electronic driver, Power factor is >0.9 with a THD <20%. Driver Lifetime: 50,000 hours at 25°C ambient operating conditions. For more driver options, see Pinnacle Resource Guide on download pages at pinnacle-ltg.com. Some FINA configurations will not accommodate all driver options.

Circuiting: Select from Single circuit (1), Emergency circuit (E) or Night Light circuit (N). Some FINA configurations will not accommodate all circuiting options, consult with factory.

Battery & Emergency: Select battery or emergency options if required. If battery or emergency option is not required, enter 0. Battery duration is 90 minutes as standard. Test button is integral to fixture. For more Battery options, see Pinnacle Resource Guide on download pages at pinnacle-ltg.com.

Finish: Standard powder-coat textured white, metallic silver, textured black, graphite, or bronze painted finish, consult factory for chip of standard paint finishes. Contact factory for additional custom color and finish options.

Controls: DLM utilizes wired network connections for digital control through switching and dimming with 0-10v LED drivers. Enlighted Smart Sensor provides multi-functionality including daylight harvesting and PIR occupancy; for IOT platform using 0-10v LED drivers. Enlighted Smart Sensor provides multi-functionality including daylight harvesting and PIR occupancy; for Connected platform using 0-10v LED drivers.

Labels: ETL Listed conforming to UL1598 in US and CSA 250 in Canada. LO, MO, and HO lumen packages are IC Rated, approved for dry/damp location unless otherwise noted.

Fixture Weight: 47 lbs maximum

Buy American Act compliant

Warranty: FINA LED offered with a 5-year limited warranty. Covers LED, driver and fixture.