


# EDGE FORMS

## EV1DF

### 1" Recessed Direct Form

#### Form Sizes



#### Key Features

- Illuminated recessed outlines blend seamlessly into the ceiling, highlighting negative space
- Single piece housing, available in 2x2, 2x4, and 4x4 forms
- Co-extruded narrow 1.5" lens provides smooth uniform lines of light
- Integral driver
- Family offering available in recessed and suspended applications
- Product transparency with third-party verified Living Building Challenge (LBC) Declared
- Buy American Act Compliant



Example Part #: EV1DF-HE-835HO-S2-G1-U-FSD-1-0-W

EV1DF-	SHIELDING	CRI, CCT & OUTPUT	FORM	MOUNTING	VOLTAGE	DRIVER	CIRCUITING	BATTERY & EMERGENCY	FINISH	FIXTURE OPTIONS
--------	-----------	-------------------	------	----------	---------	--------	------------	---------------------	--------	-----------------

--	-----	---	--	
SHIELDING	SOURCE <sup>1</sup>	FORM	MOUNTING <sup>2</sup>	
<b>A</b> - Satine Lens <b>HE</b> - High Efficiency Lens <i>Shielding pg. 2</i>	<b>27</b> __ - 2700K <b>30</b> __ - 3000K <b>35</b> __ - 3500K <b>40</b> __ - 4000K <b>CL</b> _____ - Custom Lumens <b>CW</b> _____ - Custom Watts <i>Lumen Output pg. 2</i>	<b>LO</b> - 250 lms/ft <b>MO</b> - 500 lms/ft <b>HO</b> - 750 lms/ft <b>VHO</b> - 1000 lms/ft <b>CL</b> _____ - Custom Lumens <b>CW</b> _____ - Custom Watts <i>Lumen Output pg. 2</i>	<b>S2</b> - 2' x 2' Square <b>S4</b> - 4' x 4' Square <b>R24</b> - 2' x 4' Rectangle <i>Form pg. 3</i>	<b>G1</b> - 1" (15/16") T Bar <b>G9</b> - 9/16" T Bar <b>GS</b> - Screw Slot T Bar <b>SF</b> - Spackle Flange <i>Mounting pg. 3</i>

VOLTAGE	DRIVER	CIRCUITING	BATTERY & EMERGENCY <sup>3</sup>
<b>U</b> - Universal (120 thru 277V) <b>1</b> - 120V <b>2</b> - 277V <b>3</b> - 347V <i>Voltage pg. 3</i>	<b>FSD</b> - Factory Select Driver (1%, 0-10v) <b>PL2</b> - Advance Xitanium (1%, 0-10v) <b>OL2</b> - eldoLED (1%, 0-10v) <b>OL4</b> - eldoLED 347V (1%, 0-10v) <b>EE1</b> - eldoLED ECoDrive (1%, 0-10v) <b>ES1</b> - eldoLED SOLOdrive (0.1%, 0-10v) <b>LH1</b> - Lutron Hi-lume (1%, EcoSystem) <i>Driver pg. 4</i>	<b>1</b> - Single Circuit <b>E</b> - Emergency (entire fixture) <b>N</b> - Night Light (entire fixture) <i>Circuiting pg. 4</i>	<b>0</b> - None <b>1FSB</b> - Factory Select Battery <b>1FSG</b> - Factory Select ALCR <b>1GI</b> - Iota ETS DR <b>1GB</b> - Bodine GTD <b>1PLL</b> - Bodine 10W <b>1ILL</b> - Iota 10W <i>Battery and Emergency pg. 4</i>


FINISH	FIXTURE OPTIONS	CONTROLS
<b>W</b> - White <b>S</b> - Metallic Silver <b>BL</b> - Textured Black <b>BR</b> - Bronze <b>GR</b> - Graphite <b>CC</b> - Custom Color <i>Finish pg. 5</i>	<b>CP</b> - Chicago Plenum <b>FW6</b> - 6' Flex Whip <i>Fixture Options pg. 5</i>	Pinnacle is able to accommodate different control solutions from different manufacturers. Consult factory for more information.

<sup>1</sup>When specifying CRI, CCT & OUTPUT the first \_ is for specifying either **8** - 80CRI or **9** - 90CRI. The ending \_ are for specifying output, example **HO** - High Output. See output charts for more information. <sup>2</sup>Grid mounting types include a T-Bar compatible rail on the outer perimeter of the Form and a flanged rail on the inner perimeter to support cut ceiling tiles. Consult factory for matching outside/inside mounting rails. <sup>3</sup>Maximum one battery/emergency device per form. Not available in S2.

Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.



## Shielding

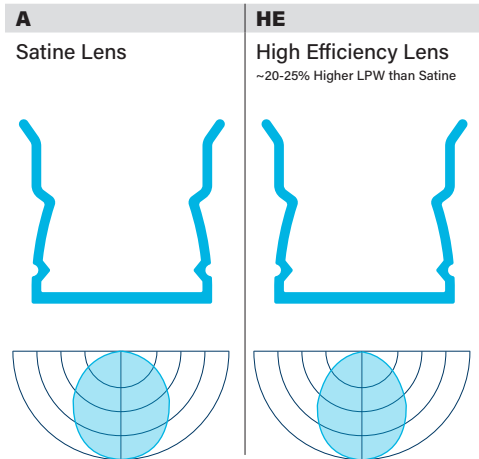

## CRI, CCT & Output

- Specify either 80 or 90 CRI
- Longer lead-time may apply for 90 CRI. Consult factory
- 90 CRI = R9≥50
- Total delivered lumens per form shown on table below.  
Lumens per foot; LO - 250lms/ft, MO - 500lms/ft, HO - 750lms/ft and VHO - 1000lms/ft

### Custom Output - Lumens OR Wattage

<b>CL</b> _____	Specify CRI, CCT and desired lumens (i.e. CL835600)	Specify lumens as PER FOOT between standard offering listed below. Lumens are specified per color temp.
<b>CW</b> _____	Specify CRI, CCT and desired wattage (i.e. CW9407)	Specify wattage as PER FOOT between standard offering listed below. Lumens are specified per color temp.

### Forms Direct 80 CRI

	Color	Output																	
		S2 - 2x2 Square						S4 - 4x4 Square						R24 - 2x4 Rectangle					
		A Lens			HE Lens			A Lens			HE Lens			A Lens			HE Lens		
		Lumens	LPW	Watts	Lumens	LPW	Watts	Lumens	LPW	Watts	Lumens	LPW	Watts	Lumens	LPW	Watts	Lumens	LPW	Watts
<b>830LO</b>	3000K	2000	83	24.1	2000	104	19.2	4000	83	48.3	4000	104	38.5	3000	83	36.2	3000	104	28.9
<b>830MO</b>		4000	92	43.5	4000	114	35.2	8000	92	87.0	8000	114	70.4	6000	92	65.2	6000	114	52.8
<b>830HO</b>		6000	93	64.3	6000	113	53.0	12000	93	128.6	12000	113	106.1	9000	93	96.5	9000	113	79.6
<b>830VHO</b>	3500K	N/A			8000	117	68.6	N/A			16000	117	137.2	N/A			12000	117	102.9
<b>835LO</b>		2000	86	23.4	2000	107	18.7	4000	86	46.8	4000	107	37.3	3000	86	35.1	3000	107	28.0
<b>835MO</b>		4000	95	42.1	4000	117	34.1	8000	95	84.2	8000	117	68.3	6000	95	63.2	6000	117	51.2
<b>835HO</b>		6000	96	62.3	6000	117	51.4	12000	96	124.5	12000	117	102.7	9000	96	93.4	9000	117	77.0
<b>835VHO</b>	4000K	N/A			8000	120	66.8	N/A			16000	120	133.7	N/A			12000	120	100.3
<b>840LO</b>		2000	86	23.4	2000	107	18.7	4000	86	46.8	4000	107	37.3	3000	86	35.1	3000	107	28.0
<b>840MO</b>		4000	95	42.1	4000	117	34.1	8000	95	84.2	8000	117	68.3	6000	95	63.2	6000	117	51.2
<b>840HO</b>		6000	96	62.3	6000	117	51.4	12000	96	124.5	12000	117	102.7	9000	96	93.4	9000	117	77.0
<b>840VHO</b>		N/A			8000	120	66.8	N/A			16000	120	133.7	N/A			12000	120	100.3

### Forms Direct 90 CRI

<b>927LO</b>	2700K	2000	73	27.6	2000	85	23.6	4000	73	55.2	4000	85	47.2	2000	73	41.4	3000	85	35.4
<b>927MO</b>		4000	74	54.0	4000	94	42.5	8000	74	108.0	8000	94	85.1	4000	74	81.0	6000	94	63.8
<b>927HO</b>		N/A			6000	95	62.9	N/A			12000	95	125.8	N/A			9000	95	94.3
<b>927VHO</b>	3000K	N/A			N/A			N/A			N/A			N/A			N/A		
<b>930LO</b>		2000	79	25.3	2000	92	21.7	4000	79	50.6	4000	92	43.4	2000	79	38.0	3000	92	32.5
<b>930MO</b>		4000	81	49.4	4000	103	39.0	8000	81	98.8	8000	103	78.0	4000	81	74.1	6000	103	58.5
<b>930HO</b>		6000	83	72.5	6000	102	58.6	12000	83	145.0	12000	102	117.2	6000	83	108.7	9000	102	87.9
<b>930VHO</b>	3500K	N/A			N/A			N/A			N/A			N/A			N/A		
<b>935LO</b>		2000	79	25.4	2000	92	21.8	4000	79	50.8	4000	92	43.5	2000	79	38.1	3000	92	32.7
<b>935MO</b>		4000	81	49.6	4000	102	39.1	8000	81	99.3	8000	102	78.3	4000	81	74.4	6000	102	58.7
<b>935HO</b>		6000	82	72.8	6000	102	58.8	12000	82	145.6	12000	102	117.6	6000	82	109.2	9000	102	88.2
<b>935VHO</b>	4000K	N/A			N/A			N/A			N/A			N/A			N/A		
<b>940LO</b>		2000	79	25.4	2000	92	21.8	4000	79	50.8	4000	92	43.5	2000	79	38.1	3000	92	32.7
<b>940MO</b>		4000	81	49.6	4000	102	39.1	8000	81	99.3	8000	102	78.3	4000	81	74.4	6000	102	58.7
<b>940HO</b>		6000	82	72.8	6000	102	58.8	12000	82	145.6	12000	102	117.6	6000	82	109.2	9000	102	88.2
<b>940VHO</b>		N/A			N/A			N/A			N/A			N/A			N/A		


Specifications and dimensions subject to change without notice. Specification sheets that appear on pinnacle-ltg.com are the most recent version and supersede all other previously printed or electronic versions.

Designed in Denver, CO • USA | pinnacle-ltg.com | O: 303-322-5570 F: 303-322-5568

EV1DF\_LED\_SPEC\_JUNE2025








Form

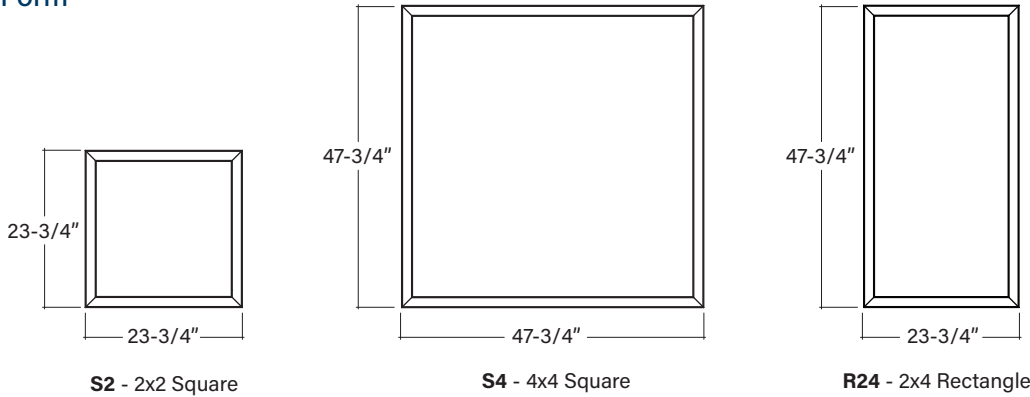

Mounting

- Designed to install into acoustical grid and inaccessible ceilings
- G1, G9, and GS provided with flanged inner rail to support cut ceiling tile (by others), SF mounting will have spackle flange inner and outer rails
- Grid retention brackets integral to housing and require mechanical attachment to grid
- Each housing contains 8 grid retention brackets
- Tie off fixture to structure with retention wires
- Approved for dry/damp location unless otherwise noted

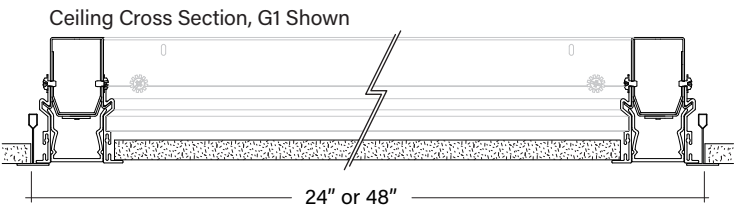

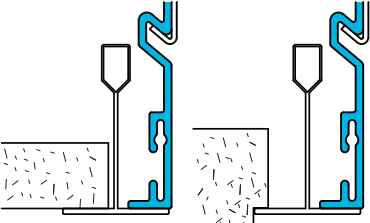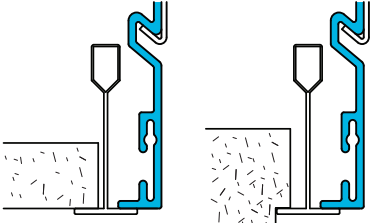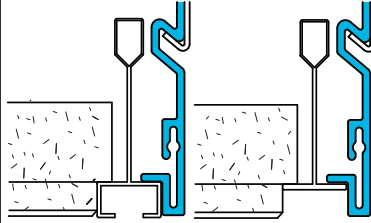G1	G9	GS	SF
1" (15/16") T-Bar	9/16" T-Bar <i>For tegular tile installations, fixture position will not be flush to the bottom of the tile</i>	Screw Slot & 9/16" T-Bar <i>For 9/16" installations with tegular tile, fixture position will be flush to the bottom of the tile</i>	Drywall, Spackle Flange Detail
			
Standard Tile    Tegular Tile	Standard Tile    Tegular Tile	Tegular Tile    Tegular Tile	

Voltage

- Some EV1DF configurations will not accommodate all voltage options; consult with factory

U	Universal
1	120 volt
2	277 volt
3	347 volt



## Driver

- Standard Driver Option = FSD
- Driver Lifetime: 50,000 hours at 25°C ambient operating conditions
- For more driver options see Pinnacle Resource Guide
- Some EV1DF configurations will not accommodate all driver options; consult with factory

### 0-10V Drivers

<b>FSD</b>	Factory Select Driver 1%, 0-10v
<b>PL2</b>	Advance Xitanium 1%, 0-10v
<b>PL4</b>	Advance Xitanium 347v 1%, 0-10v, requires 347v option
<b>OL2</b>	eldoLED Optotronic, 1%, 0-10v
<b>OL4</b>	eldoLED Optotronic 347v, 1% 0-10v, requires 347v option
<b>EE1</b>	eldoLED ECOdrive 1%, 0-10v, Logarithmic
<b>EE2</b>	eldoLED ECOdrive 1%, 0-10v, Linear
<b>ES1</b>	eldoLED SOLOdrive 0.1%, 0-10v, Logarithmic
<b>ES2</b>	eldoLED SOLOdrive 0.1%, 0-10v, Linear

### DALI Drivers

<b>EE3</b>	eldoLED ECOdrive 1%, DALI 2, Logarithmic, DT6
<b>ES3</b>	eldoLED SOLOdrive 0.1%, DALI 2, Logarithmic, DT6

### Lutron Drivers

<b>LH1</b>	Lutron Hi-lume Soft-on, Fade-to-black 1%, EcoSystem, LDE1
------------	---

## How to specify Circuiting, Battery and Emergency

- 1**
- Select fixture circuiting from options below
  - Some EV1DF configurations will not accommodate all circuiting options, consult with factory
  - Section wiring not available within an individual Form. Emergency circuit and Night Light circuit options are for designation purposes only.

## Circuiting

<b>1</b>	Single Circuit
<b>E</b>	Emergency Circuit only
<b>N</b>	Night Light Circuit only

- 2** + **3**
- Battery and emergency options are available in addition to fixture circuit
  - Select battery and emergency options below; factory shop drawing required
  - Some configurations will not accommodate all circuiting options, consult with factory

## Battery and/or Emergency If Required

<b>0</b>	No battery or specific emergency required
----------	---

## Battery

- Not available in S2 maximum one battery per form
- Battery powers (one) 4ft section within form during the loss of normal power
- 90 minute battery runtime; test button is remote to fixture
- For more battery options see [Pinnacle Resource Guide](#)

<b>0</b>	No Battery
<b>1FSB</b>	Factory Select Battery 10w, Integral Lithium
<b>1FSBST</b>	Factory Select Battery 10w, Integral Lithium, Self Testing
<b>1PLL</b>	Bodine 10w Integral Lithium, Self Testing
<b>1ILL</b>	Iota 10w Integral Lithium, Self Testing

### For Approximate Battery Lumen Output

- Multiply fixture LPW x battery wattage shown on Lumen Table
- 92.3 (LPW) x 10 (watts) = 923 battery lumen output

## Emergency

- Not available in S2, maximum one EM device per form
- Emergency device powers entire form during the loss of normal power
- Combine battery and emergency ordering codes if both options are selected

<b>1FSG</b>	Factory Select ALCR, Emergency Control Device, UNV
<b>1GI</b>	Iota ETS-DR, Emergency Control Device, UNV
<b>1GB</b>	Bodine GTD, Emergency Control Device, 120v or 277v

### Battery OR Emergency Ordering Examples

- |  |                       |
|--|-----------------------|
| • Single circuit, 10w Integral Battery | Ordering Code: 1-1FSB |
| • Emergency only, 10w Integral Battery | Ordering Code: E-1PLL |
| • Single circuit, GTD required         | Ordering Code: 1-1GB  |



Finish

- Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes
- Selecting a fixture finish other than white may impact lumen output; consult factory for more information

W	White
S	Metallic Silver
BL	Textured Black
GR	Graphite
BR	Bronze
CC	Custom Color

Fixture Options

CP	Chicago Plenum
FW6	6' Flex Whip


Controls

- Pinnacle is able to accommodate different control solutions from different manufacturers. Consult Factory for more information

Photometrics

Satine Lens

Test #	KPL2015-70
Catalog #	EV1DF-A-840HO-4
Lumens	2781
Watts	28.2
Efficacy	99 LPW



NOTE: For accurate light calculations of Edge Forms using lighting design software, Pinnacle recommends assembling a geometric arrangement from individual 2-foot and/or 4-foot Edge 1 IES files. Refer to the Forms IES Instructions for more details.



## Applications & Certificates

**Construction:** Welded single piece housing with formed cold-rolled 20 gauge steel and extruded aluminum mounting rails.

**Shielding:** Diffuse snap-in flush acrylic lens, removable for maintenance.

**Mounting:** EDGE Recessed Forms are designed to install into acoustical grid and inaccessible ceilings. Consult factory for detailed installation instructions.

**LED:** 25°C test environment. Lumen output/wattage has a margin of +/- 5%; Luminaire configurations tested in accordance with IES LM-79. Diodes tested in accordance with IES LM-80. Lifetime calculated using IES TM-21. Minimum lifetime greater than 60,000 hours. TM-21-21 Lifetime Rating L70 = >72,000 hours, L90 = 64,700 hours. MacAdam 3-Step Ellipses. For all available IES files, please visit our website at [pinnacle-ltg.com](http://pinnacle-ltg.com).

**CRI, CCT & Lumen Output:** Not all lumen packages available in every CRI/CCT. Four lumen packages available. Low (LO), Medium (MO), High (HO) and Very High (VHO). Custom outputs are available. Specify custom lumens or watts between standard offering listed on CRI, CCT & Output page. 80 CRI is available for 3000K, 3500K, and 4000K. 90 CRI is available for 2700K, 3000K, 3500K and 4000K. 90 CRI = R9≥50.

**Voltage:** Universal (U), 120 volt (1), 277 volt (2) and 347 volt (3) options available. Must specify PL4 or OL4 in Driver section when 347 volt (3) is selected. Some EDGE configurations will not accommodate all voltage options; consult with factory.

**Driver:** Standard Driver Option is Factory Select Driver 0-10V, 1% = FSD. Electronic driver, Power factor is >0.9 with a THD <20%. Driver Lifetime: 50,000 hours at 25°C ambient operating conditions. Ambient operating range: -20°F/-30°C to 103°F/39°C. For more driver options, see Pinnacle Resource Guide. Some EDGE configurations will not accommodate all driver options.

**Circuiting:** Select from single circuit (1), emergency circuit (E), night light circuit (N). Some EDGE configurations will not accommodate all circuiting options; consult with factory.

**Battery & Emergency:** Select battery or emergency options if required. If battery or emergency option is not required, enter 0. Battery duration is 90 minutes as standard. Test button is remote to fixture. For more Battery options, see Pinnacle Resource Guide.

**Finish:** Standard powder-coat textured white, metallic silver, textured black, graphite or bronze painted finish; consult factory for chip of standard paint finishes or for additional custom color and finish options.

**Controls:** Mod options available, consult with factory.

**Labels:** UL and cUL 1598 listed. All lumen packages are IC Rated, approved for dry/damp location unless otherwise noted.

**Sustainability:** All models are Living Building Challenge (LBC) Declared with third-party verification. The Declare Label from ILFI provides transparent insights into materials, sourcing, and environmental impact, promoting informed, sustainable choices that benefit both people and the planet. View the label [here](#).

**Fixture Weight:** Maximum fixture weight is 14lbs for 2x2, 21lbs for 2x4, and 28lbs for 4x4.

**Buy American Act Compliant**

**Warranty:** EDGE LED offered with a 5-year limited warranty. Covers LED, driver and fixture.